



Uncommon Excellence™

1916 - 2016

DIXON
BRASS



The Right Connection®

2016

DIXONVALVE.COM
877.963.4966

Index

| SERIES NUMBER | PAGE | SERIES NUMBER | PAGE |
|--------------------------------|---|--------------------------------------|--------------------------------------|
| STANDARD HOSE FITTINGS | | BEADED HOSE FITTINGS | |
| 102 | Male Pipe..... | 268B | Male Pipe..... |
| 102-SS | Male Pipe-Stainless | | |
| 102-BSPT | Male Pipe-British Thread | | |
| 103 | Male Pipe Swivel | | |
| 104 | Female Pipe..... | | |
| 104-SS | Female Pipe-Stainless Steel..... | | |
| 105 | Female Pipe Swivel | | |
| 124 | Female Swivel-Ball Seat..... | | |
| 126 | Female Swivel-Gasket Seat | | |
| 129 | 90° Elbow, Male Pipe..... | | |
| 129-SS | 90° Elbow, Male Pipe-Stainless Steel..... | | |
| 134 | 90° Elbow, Female Pipe | | |
| 139 | 45° Elbow, Male Pipe..... | | |
| 142 | Male 45° SAE | | |
| 143 | Female Swivel 45° SAE/37° JIC Dual Angle Seat..... | | |
| 144 | Female Swivel 45° SAE..... | | |
| 145 | Female Swivel 37° JIC | | |
| 177 | 90° Elbow Splicer | | |
| 177-SS | 90° Elbow Splicer-Stainless Steel | | |
| 178 | Hose Splicer | | |
| 178-SS | Hose Splicer-Stainless Steel | | |
| 179 | Tee Splicer | | |
| 179-SS | Tee Splicer-Stainless Steel | | |
| WELDING CONNECTORS | | LOK-ON (Push-on Style) HOSE FITTINGS | |
| 152 | Right Hand Thread (Oxygen Line) | | |
| 154 | Left Hand Thread (Acetylene Line)..... | | |
| 156 | Adapter-Right Hand Thread x NPTF Thread | | |
| 158 | Adapter-Left Hand Thread x NPTF Thread | | |
| BRASS FERRULES & CRIMPING TOOL | | RE-USABLE FITTINGS | |
| 200 | Stamped Brass Ferrules | | |
| 200-FC | Ferrule Crimper..... | | |
| RE-USABLE FITTINGS | | BRASS PIPE FITTINGS | |
| 180 | Ferrule | | |
| 180-SS | Ferrule-Stainless Steel | | |
| 182 | Male Stem..... | | |
| 182-SS | Male Stem-Stainless Steel..... | | |
| 183 | Reusable Set- Ferrule and Male Stem | | |
| 183-SS | Reusable Set- Stainless Steel | | |
| 184 | Female Swivel Stem..... | | |
| 185 | Reusable Set- Ferrule and Female Swivel Stem | | |
| 186 | Reusable Splicer Stem | | |
| 187 | Hose Splicer (Ferrules and Splicer)..... | | |
| | | 163 | Hex Head Plug..... |
| | | 165 | Close Pipe Nipple |
| | | 166 | Long Pipe Nipple |
| | | 169 | 90° Male Pipe Elbows..... |
| | | 172 | Male Union-NPSM x NPTF..... |
| | | 174 | Adapter-Male NPSM x Female NPTF..... |
| | | 176 | Male Union-NPSM |
| | | 207-BH | Bulkhead Anchor Coupling |
| | | 211 | Square Head Plug - Low Lead..... |
| | | 213 | Pipe Cap |
| | | 219 | Hex Socket Plug - Low Lead |
| | | 228 | Female Cross |
| | | 302 | 90° Female Elbow |
| | | 304 | 90° Street Elbow |
| | | 306 | 45° Street Elbow |
| | | 322 | Female Tee |
| | | 324 | Male Branch Tee |
| | | 326 | Street Tee |
| | | 370 | Male Hex Nipple |
| | | 371 | Female Hex Coupling |
| | | 373 | Reducer Bushing |
| | | 375 | Adapter-Female x Male |
| | | 377 | Reducing Coupler-Double Female |
| | | 379 | Male Reducing Hex Nipple |

Index

| SERIES NUMBER | PAGE |
|--|---|
| GARDEN HOSE FITTINGS | |
| 500 | Garden Hose Accessory Products..... 34 |
| 501 | Female Hose x Female Pipe, non-swivel 35 |
| 501-SS | Female Hose x Female Pipe, non-swivel Stainless Steel..... 35 |
| 502 | Female Hose x Female Pipe, swivel..... 35 |
| 502-SS | Female Hose x Female Pipe, swivel Stainless Steel..... 35 |
| 503 | Female Hose x Male Pipe, non-swivel..... 35 |
| 503-SS | Female Hose x Male Pipe, non-swivel Stainless Steel..... 35 |
| 504 | Female Hose x Male Pipe, swivel..... 35 |
| 504-SS | Female Hose x Male Pipe, swivel Stainless Steel..... 35 |
| 506 | Female Hose x Female Hose, swivel 36 |
| 507 | Male Hose x Female Pipe..... 36 |
| 507-SS | Male Hose x Female Pipe - Stainless Steel.... 36 |
| 508 | Male Hose x Male Pipe..... 36 |
| 508-SS | Male Hose x Male Pipe - Stainless Steel.... 36 |
| 509 | Male Hose x Male Hose..... 36 |
| 509-SS | Male Hose x Male Hose - Stainless Steel.... 36 |
| 513 | Hose Cap..... 37 |
| 514 | Male Hose x Male Pipe x Female Pipe..... 37 |
| 514-SS | Male Hose x Male Pipe x Female Pipe - Stainless Steel..... 37 |
| 578 | Garden Hose Mender 37 |
| 585 | Short Shank Male 37 |
| 586 | Short Shank Female Swivel, round nut 38 |
| 587 | Short Shank Set (male and female swivel), round nut..... 38 |
| 588 | Short Shank Female Swivel, hex nut..... 38 |
| 589 | Short Shank Set (male and female swivel), hex nut 38 |
| 590 | Garden Hose Male..... 39 |
| 590-SS | Garden Hose Male - Stainless Steel..... 39 |
| 591 | Garden Hose Female Swivel 39 |
| 591-SS | Garden Hose Female - Stainless Steel 39 |
| 592 | Garden Hose Set (male and female swivel)..... 39 |
| 592-SS | Garden Hose Set (male and female swivel) - Stainless Steel 39 |
| 593 | Long Shank Male..... 40 |
| 594 | Long Shank Female Swivel 40 |
| 595 | Long Shank Set (male and female swivel)..... 40 |
| 833 | Spray Valve..... 41 |
| 832 | Spray Valve..... 41 |
| GWH Grease Whip Hose Assemblies, Coupler and Fittings 42 | |
| GWHZ Zerk Fittings 42 | |

Because of the health hazards associated with contamination and lead content in drinking water systems, Dixon couplings, unless otherwise specifically approved, are not recommended for potable water service and should not be used in applications where drinking water will contact the wetted surfaces of the couplings.

| SERIES NUMBER | PAGE |
|-----------------------------|------------------------------------|
| COMPRESSION FITTINGS | |
| 60C | Sleeve..... 43 |
| 60PT | Acetal Sleeve..... 43 |
| 61C | Nut 43 |
| 61CL | Long Nut 43 |
| 62C | Union 44 |
| 62CBH | Bulkhead Union 44 |
| 63PT | Brass Insert..... 44 |
| 66C | Female Connector 45 |
| 68C | Male Connector 45 |
| 164C/ | |
| 264C | Union Tee..... 46 |
| 165C | Union Elbow..... 46 |
| 169C/ | |
| 269C | Male Elbow 47 |
| 170C | Female Elbow 47 |
| 171C | Male Run Tee..... 47 |
| 172C | Male Branch Tee..... 48 |
| 176C | Adapter Tee 48 |
| 177C | Female Branch Tee..... 48 |
| 179C | 45° Elbow 48 |
| 639C | Seal Plug 49 |
| 682C | Straight Thru Tank Fitting..... 49 |

| D.O.T. AIR BRAKE FITTINGS | |
|---------------------------|---------------------------|
| 60NAB | Sleeve..... 50 |
| 61NAB | Nut 51 |
| 62NAB | Union 51 |
| 62NABH | Bulkhead Union 51 |
| 62NBH | Bulkhead Union 51 |
| 62NFBH | Bulkhead Union 52 |
| 63NAB | Stainless Insert 52 |
| 64NAB | Union Tee..... 52 |
| 65NAB | Union Elbow..... 53 |
| 66NBH | Bulkhead Union 53 |
| 66NAB | Female Connector 53 |
| 68NAB | Male Connector 54 |
| 69NAB | Male Elbow 54 |
| 70NAB | Female Elbow 55 |
| 71NAB | Male Run Tee..... 55 |
| 72NAB | Male Branch Tee..... 56 |
| 79NAB | 45° Elbow 56 |
| NAB | Nylon Tubing..... 50 |
| TC97 | Tubing Cutter 50 |

| D.O.T. AIR BRAKE FITTINGS - RUBBER AIR HOSE | |
|---|---|
| 56RBSG | Spring 57 |
| 60RB | Sleeve..... 57 |
| 61RB | Nut 57 |
| 61RBSG | Spring Guard Nut..... 57 |
| 67RBSG | Air Brake Hose Nut & Attached Spring 57 |
| 68RB | Male Connector Body Only 58 |
| 68RBSG | Male Connector with Spring Guard..... 58 |

| LEAD FREE FITTINGS | |
|--------------------|-------------|
| LEAD FREE | 59-63 |

In order to better serve you, Dixon Brass continues to produce non-catalog sizes and products on a special quote / delivery basis. Please contact your sales representative for further details.



Standard Hose Fittings

**How to Use
Dixon Brass
Standard Hose Fitting
Part Numbers**

1020406C

1020406C

1020406C

1020406C

SERIES IDENTIFICATION

HOSE I.D. (Measured in sixteenths of an inch)

THREAD SIZE (Measured in sixteenths of an inch)

MATERIAL/THREAD TYPE

Dixon Brass offers over 180 standard hose fittings in 20 different series. All standard hose fittings are intended for use with hose clamps or crimped ferrules.

All standard hose fittings are machined from free cutting brass alloys CDA, 360 and 377 and stainless steel alloys 316, 303 or 304.


102 Series
360 CDA Brass

102-SS Series
Type 316 stainless



102-BSPT Series
British Standard Pipe Thread
360 CDA Brass

For SS contact Dixon for price and availability



NPTF- MALE HOSE BARB

National Pipe Tapered - Dryseal

| Standard Brass Part Number | SS | BSPT | Hose ID A | NPTF ** Thread B | Length C | Hex | Number of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|----------------------------|----|------|-----------|------------------|----------|--------|-----------------|---------------|-----------|-------------------|
| 1020202C | SS | | 1/8 | 1/8-27 | 1.06 | 7/16 | 3 | .46 | 100 * | 1.8 |
| 1020204C | | | | 1/4-18 | 1.16 | 9/16 | 3 | .46 | 100 | 3.1 |
| 1020302C | SS | | 3/16 | 1/8-27 | 1.35 | 7/16 | 3 | .75 | 100 * | 2.2 |
| 1020304C | | | | 1/4-18 | 1.54 | 9/16 | 3 | .75 | 100 * | 4.0 |
| 1020402C | SS | BSPT | 1/4 | 1/8-27 | 1.57 | 1/2 | 4 | .97 | 100 * | 2.9 |
| 1020404C | SS | | | 1/4-18 | 1.76 | 9/16 | 4 | .97 | 100 * | 4.3 |
| 1020406C | SS | | | 3/8-18 | 1.76 | 11/16 | 4 | .97 | 100 * | 5.4 |
| 1020408C | | | | 1/2-14 | 1.97 | 7/8 | 4 | .97 | 50 | 13.8 |
| 1020502C | SS | | 5/16 | 1/8-27 | 1.57 | 1/2 | 4 | .97 | 100 * | 2.9 |
| 1020504C | SS | | | 1/4-18 | 1.76 | 9/16 | 4 | .97 | 50 * | 4.3 |
| 1020506C | SS | | | 3/8-18 | 1.76 | 11/16 | 4 | .97 | 50 * | 5.6 |
| 1020602C | SS | | 3/8 | 1/8-27 | 1.57 | 1/2 | 4 | .97 | 100 * | 3.8 |
| 1020604C | SS | | | 1/4-18 | 1.76 | 9/16 | 4 | .97 | 100 * | 4.8 |
| 1020606C | SS | | | 3/8-18 | 1.76 | 11/16 | 4 | .97 | 50 * | 6.1 |
| 1020608C | SS | | | 1/2-14 | 1.97 | 7/8 | 4 | .97 | 25 * | 10.8 |
| 1020612C | | | | 3/4-14 | 1.97 | 1-1/16 | 4 | .97 | 25 | 14.9 |
| 1020804C | SS | | 1/2 | 1/4-18 | 1.76 | 5/8 | 4 | .97 | 50 * | 6.7 |
| 1020806C | SS | | | 3/8-18 | 1.76 | 11/16 | 4 | .97 | 50 * | 6.9 |
| 1020808C | SS | | | 1/2-14 | 1.97 | 7/8 | 4 | .97 | 25 * | 12.0 |
| 1020812C | SS | | | 3/4-14 | 1.97 | 1-1/16 | 4 | .97 | 25 * | 15.7 |
| 1021006C | SS | | 5/8 | 3/8-18 | 1.76 | 11/16 | 4 | .97 | 50 * | 7.8 |
| 1021008C | SS | | | 1/2-14 | 1.97 | 7/8 | 4 | .97 | 25 * | 11.6 |
| 1021012C | SS | | | 3/4-14 | 1.97 | 1-1/16 | 4 | .97 | 25 * | 15.7 |
| 1021208C | SS | | 3/4 | 1/2-14 | 2.19 | 7/8 | 4 | 1.19 | 25 * | 16.4 |
| 1021212C | SS | | | 3/4-14 | 2.19 | 1-1/16 | 4 | 1.19 | 20 * | 18.0 |
| 1021612C | SS | | 1 | 3/4-14 | 2.19 | 1-1/16 | 5 | 1.19 | 20 * | 25.0 |
| 1021616C | SS | | | 1-11-1/2++ | 2.54 | 1-3/8 | 5 | 1.19 | 10 * | 37.1 |
| 1022012C | | | 1-1/4 | 3/4-14 | 2.37 | 1-3/8 | 5 | 1.19 | 10 | 38.7 |
| 1022016C | | | | 1-11-1/2++ | 2.54 | 1-3/8 | 5 | 1.19 | 5 | 46.9 |

* 102-SS and 102-BSPT are packaged to order


** NPT thread on 102-SS

++ capped

Standard Hose Fittings


103 Series

NPTF- MALE SWIVEL HOSE BARB
National Pipe Tapered - Dryseal

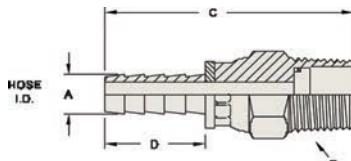

| Part Number | Hose ID A | NPTF Thread B | Length C | Hex | Number of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------------|---------------------|-------------|--------|--------------------|---------------------|--------------|----------------------|
| 1030402C | 1/4 | 1/8-27 | 2.19 | 9/16 | 4 | .97 | 100 | 3.5 |
| 1030404C | | 1/4-18 | 2.12 | 9/16 | 4 | .97 | 100 | 6.0 |
| 1030604C | | 1/4-18 | 2.12 | 9/16 | 4 | .97 | 100 | 6.6 |
| 1030606C | 3/8 | 3/8-18 | 2.12 | 11/16 | 4 | .97 | 50 | 8.4 |
| 1030806C | | 3/8-18 | 2.12 | 11/16 | 4 | .97 | 50 | 9.7 |
| 1030808C | 1/2 | 1/2-14 | 2.33 | 7/8 | 4 | .97 | 25 | 14.1 |
| 1031212C | 3/4 | 3/4-14 | 2.33 | 1-1/16 | 4 | .97 | 20 | 20.7 |
| 1031616C | 1 | 1-11-1/2 + | 3.43 | 1-3/8 | 5 | 1.19 | 10 | 40.0 |

Note: Swivel for assembly convenience only, not for live swivel applications, 120 maximum PSI
+ capped threads

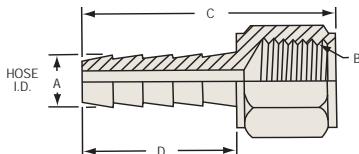

104 Series
360 CDA Brass

NPTF- FEMALE HOSE BARB - SOLID


National Pipe Tapered - Dryseal

| Part Number | 303 SS | Hose ID A | NPTF ** Thread B | Length C | Hex | Number of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|-----------|--------------|------------------------|-------------|--------|--------------------|---------------------|--------------|----------------------|
| 1040202C | | 1/8 | 1/8-27 | .96 | 1/2 | 3 | .46 | 100 | 2.1 |
| 1040204C | | | 1/4-18 | 1.15 | 5/8 | 3 | .46 | 100 | 4.0 |
| 1040302C | | 3/16 | 1/8-27 | 1.25 | 1/2 | 3 | .75 | 100 | 2.4 |
| 1040304C | | | 1/4-18 | 1.44 | 5/8 | 3 | .75 | 100 | 4.3 |
| 1040402C | | | 1/8-27 | 1.47 | 1/2 | 4 | .97 | 100 | 2.8 |
| 1040404C | SS | 1/4 | 1/4-18 | 1.66 | 5/8 | 4 | .97 | 100 * | 4.6 |
| 1040406C | | | 3/8-18 | 1.66 | 3/4 | 4 | .97 | 50 | 5.6 |
| 1040408C | | | 1/2-14 | 1.66 | 15/16 | 4 | .97 | 50 | 8.1 |
| 1040502C | | | 1/8-27 | 1.47 | 9/16 | 4 | .97 | 100 | 3.6 |
| 1040504C | | 5/16 | 1/4-18 | 1.66 | 5/8 | 4 | .97 | 100 | 4.7 |
| 1040506C | | | 3/8-18 | 1.66 | 3/4 | 4 | .97 | 50 | 5.7 |
| 1040602C | | | 1/8-27 | 1.47 | 9/16 | 4 | .97 | 100 | 4.2 |
| 1040604C | SS | | 1/4-18 | 1.66 | 5/8 | 4 | .97 | 50 * | 5.4 |
| 1040606C | SS | 3/8 | 3/8-18 | 1.66 | 3/4 | 4 | .97 | 50 * | 6.3 |
| 1040608C | | | 1/2-14 | 1.66 | 15/16 | 4 | .97 | 50 | 8.8 |
| 1040612C | | | 3/4-14 | 1.97 | 1-3/16 | 4 | .97 | 25 | 20.6 |
| 1040804C | | | 1/4-18 | 1.66 | 5/8 | 4 | .97 | 50 | 6.2 |
| 1040806C | | | 3/8-18 | 1.66 | 3/4 | 4 | .97 | 50 | 7.3 |
| 1040808C | SS | 1/2 | 1/2-14 | 1.66 | 15/16 | 4 | .97 | 50 * | 9.3 |
| 1040812C | | | 3/4-14 | 1.97 | 1-3/16 | 4 | .97 | 25 * | 25.8 |
| 1041006C | | | 3/8-18 | 1.66 | 3/4 | 4 | .97 | 50 * | 7.5 |
| 1041008C | | 5/8 | 1/2-14 | 1.66 | 3/4 | 4 | .97 | 25 * | 10.0 |
| 1041012C | | | 3/4-14 | 1.97 | 1-3/16 | 4 | .97 | 25 * | 20.6 |
| 1041208C | | 3/4 | 1/2-14 | 1.88 | 15/16 | 4 | 1.19 | 25 * | 12.5 |
| 1041212C | | | 3/4-14 | 2.19 | 1-3/16 | 4 | 1.19 | 20 * | 22.6 |
| 1041612C | | 1 | 3/4-14 | 2.19 | 1-3/16 | 5 | 1.19 | 20 * | 26.1 |
| 1041616C | | | 1-11-1/2 | 2.32 | 1-3/16 | 5 | 1.19 | 10 * | 34.7 |
| 1042016C | | 1-1/4 | 1-11-1/2 | 2.32 | 1-7/16 | 5 | 1.19 | 10 | 43.7 |

* 104-SS are packaged to order

** NPT thread on 104-SS


105 Series

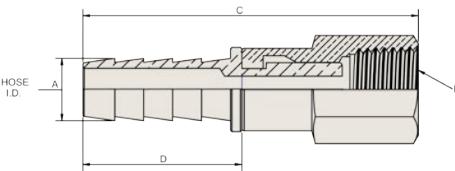**PTF-SAE SHORT - FEMALE SWIVEL HOSE BARB***Short Pipe Tapered - Dryseal*

| Part Number | Hose ID A | PTF-SAE Thread B | Over All Length C | Hex | Number of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------------|------------------------|-------------------------|-------|--------------------|---------------------|--------------|----------------------|
| 1050404C | 1/4 | 1/4-18 | 2.20 | 5/8 | 4 | .97 | 50 | 5.6 |
| 1050604C | | 1/4-18 | 2.20 | 5/8 | 4 | .97 | 50 | 6.2 |
| 1050606C | 3/8 | 3/8-18 | 2.20 | 3/4 | 4 | .97 | 50 | 8.7 |
| 1050806C | | 3/8-18 | 2.20 | 3/4 | 4 | .97 | 50 | 8.7 |
| 1050808C | 1/2 | 1/2-14 | 2.40 | 15/16 | 4 | .97 | 25 | 14.3 |


Note: Swivel for assembly convenience only, not for live swivel applications.

124 Series

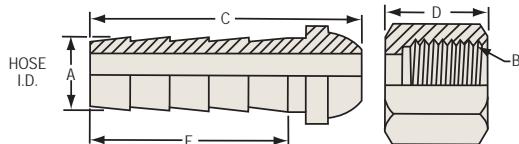**NPSM - FEMALE SWIVEL HOSE BARB***National Pipe Straight - Ball Seat Type*


| Part Number | Hose ID A | NPSM Thread B | Stem Length C | Nut Length D | Hex | Number of Barbs | Barb Length E | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------------|---------------------|---------------------|--------------------|-------|-----------------------|---------------------|--------------|----------------------|
| 1240202K | 1/8 | 1/8-27 | .79 | .44 | 1/2 | 3 | .46 | 100 | 2.3 |
| 1240302K | | 1/8-27 | 1.08 | .44 | 1/2 | 3 | .75 | 100 | 2.6 |
| 1240304K | 3/16 | 1/4-18 | 1.17 | .53 | 5/8 | 3 | .75 | 100 | 4.5 |
| 1240402K | | 1/8-27 | 1.30 | .44 | 1/2 | 4 | .97 | 100 | 3.0 |
| 1240404K | 1/4 | 1/4-18 | 1.39 | .53 | 5/8 | 4 | .97 | 100 | 4.8 |
| 1240406K | | 3/8-18 | 1.41 | .63 | 3/4 | 4 | .97 | 100 | 6.7 |
| 1240504K | | 1/4-18 | 1.39 | .53 | 5/8 | 4 | .97 | 100 | 5.0 |
| 1240506K | 5/16 | 3/8-18 | 1.41 | .63 | 3/4 | 4 | .97 | 50 | 6.6 |
| 1240604K | | 1/4-18 | 1.37 | .53 | 5/8 | 4 | .97 | 100 | 4.9 |
| 1240606K | 3/8 | 3/8-18 | 1.45 | .63 | 3/4 | 4 | .97 | 100 | 7.1 |
| 1240608K | | 1/2-14 | 1.54 | .69 | 15/16 | 4 | .97 | 100 | 12.4 |
| 1240806K | 1/2 | 3/8-18 | 1.42 | .63 | 3/4 | 4 | .97 | 50 | 7.5 |
| 1240808K | | 1/2-14 | 1.54 | .69 | 15/16 | 4 | .97 | 100 | 12.7 |
| 1241212K | 3/4 | 3/4-14 | 1.69 | .75 | 1-1/8 | 4 | 1.19 | 50 | 17.4 |

126 Series

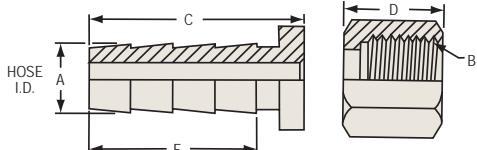**NPSM - FEMALE SWIVEL HOSE BARB***National Pipe Straight - Gasket Seat Type*


| Part Number | Hose ID A | NPSM Thread B | Stem Length C | Nut Length D | Hex | Number of Barbs | Barb Length E | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------------|---------------------|---------------------|--------------------|-------|-----------------------|---------------------|--------------|----------------------|
| 1260202C | 1/8 | 1/8-27 | .69 | .44 | 1/2 | 3 | .46 | 100 | 2.2 |
| 1260302C | | 1/8-27 | .98 | .44 | 1/2 | 3 | .75 | 100 | 2.5 |
| 1260304C | 3/16 | 1/4-18 | .98 | .53 | 5/8 | 3 | .75 | 100 | 4.0 |
| 1260402C | | 1/8-27 | 1.20 | .44 | 1/2 | 4 | .97 | 100 | 2.7 |
| 1260404C | 1/4 | 1/4-18 | 1.20 | .53 | 5/8 | 4 | .97 | 100 | 4.3 |
| 1260406C | | 3/8-18 | 1.22 | .63 | 3/4 | 4 | .97 | 100 | 6.0 |
| 1260504C | 5/16 | 1/4-18 | 1.20 | .53 | 5/8 | 4 | .97 | 100 | 4.2 |
| 1260604C | | 1/4-18 | 1.20 | .53 | 5/8 | 4 | .97 | 100 | 4.6 |
| 1260606C | 3/8 | 3/8-18 | 1.22 | .63 | 3/4 | 4 | .97 | 50 | 6.4 |
| 1260608C | | 1/2-14 | 1.22 | .69 | 15/16 | 4 | .97 | 50 | 10.4 |
| 1260806C | 1/2 | 3/8-18 | 1.22 | .63 | 3/4 | 4 | .97 | 50 | 7.0 |
| 1260808C | | 1/2-14 | 1.22 | .69 | 15/16 | 4 | .97 | 50 | 11.0 |
| 1261212C | 3/4 | 3/4-14 | 1.47 | .75 | 1-1/8 | 4 | 1.19 | 25 | 15.6 |

Not recommended for use with water

90° ELBOW- Forged
Hose Barb to Male NPTF


| Part Number | Hose ID A | NPTF Thread B | Length Centerline C | Number of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. | |
|-------------|--------------|---------------------|---------------------------|--------------------|---------------------|--------------|----------------------|------|
| 1290302C | 3/16 | 1/8-27 | 1.05 | 3 | .79 | 50 | 3.3 | |
| 1290402C | | 1/8-27 | 1.05 | 3 | .79 | 50 | 3.4 | |
| 1290404C | 1/4 | 1/4-18 | 1.14 | 3 | .79 | 50 | 6.2 | |
| 1290406C | | 3/8-18 | 1.16 | 3 | .79 | 50 | 7.3 | |
| 1290502C | | 1/8-27 | 1.05 | 3 | .79 | 25 | 3.1 | |
| 1290504C | 5/16 | 1/4-18 | 1.14 | 3 | .79 | 50 | 6.1 | |
| 1290506C | | 3/8-18 | 1.16 | 3 | .79 | 50 | 6.5 | |
| 1290602C | | 1/8-27 | 1.09 | 3 | .87 | 50 | 3.6 | |
| 1290604C | 3/8 | 1/4-18 | 1.14 | 3 | .87 | 50 | 6.6 | |
| 1290606C | | 3/8-18 | 1.22 | 3 | .87 | 50 | 8.9 | |
| 1290608C | | 1/2-14 | 1.29 | 3 | .87 | 25 | 13.1 | |
| 1290804C | | 1/4-18 | 1.17 | 3 | .87 | 50 | 6.3 | |
| 1290806C | 1/2 | 3/8-18 | 1.24 | 3 | .87 | 50 | 8.3 | |
| 1290808C | | 1/2-14 | 1.29 | 3 | .87 | 25 | 12.3 | |
| 1291006C | | 5/8 | 3/8-18 | 1.31 | 3 | .87 | 25 | 17.2 |
| 1291008C | | 1/2-14 | 1.36 | 3 | .87 | 25 | 18.6 | |
| 1291208C | 3/4 | 1/2-14 | 1.36 | 3 | .87 | 25 | 23.2 | |
| 1291212C | | 3/4-14 | 1.44 | 3 | .87 | 25 | 21.5 | |
| 1291612C | 1 | 3/4-14 | 1.65 | 4 | .98 | 10 | 37.1 | |
| 1291616C | | 1-11-1/2 ++ | 1.69 | 4 | .98 | 10 | 42.5 | |

++Capped


90° ELBOW - Casting
Hose Barb to Male NPT


129-SS (316 stainless) Series



| Part Number | Hose ID A | NPT Thread B | Length Centerline C | Number of Barbs | Height Centerline D | Lbs. per 100 pcs. |
|-------------|--------------|--------------------|---------------------------|--------------------|---------------------------|----------------------|
| 1290402SS | 1/4 | 1/8-27 | 1.1 | 3 | .85 | 3.5 |
| 1290404SS | 1/4 | 1/4-18 | 1.47 | 4 | 1.11 | 7.0 |
| 1290604SS | 3/8 | 1/4-18 | 1.25 | 3 | 1.01 | 7.4 |
| 1290606SS | 3/8 | 3/8-18 | 1.38 | 3 | 1.17 | 9.3 |
| 1290804SS | 1/2 | 1/4-18 | 1.45 | 4 | 1.50 | 6.6 |
| 1290806SS | 1/2 | 3/8-18 | 1.60 | 4 | 1.25 | 8.8 |
| 1290808SS | 1/2 | 1/2-14 | 1.64 | 4 | 1.42 | 12.6 |
| 1291208SS | 3/4 | 1/2-14 | 1.87 | 4 | 1.45 | 23.6 |
| 1291212SS | 3/4 | 3/4-14 | 1.96 | 4 | 1.65 | 21.7 |

129-SS parts are packaged to order


90° ELBOW- Forged
Hose Barb to Female NPTF


134 Series



| Part Number | Hose ID A | NPTF Thread B | Length Centerline C | Number of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------------|---------------------|---------------------------|--------------------|---------------------|--------------|----------------------|
| 1340402C | | 1/8-27 | 1.05 | 3 | .79 | 50 | 6.9 |
| 1340404C | 1/4 | 1/4-18 | 1.14 | 3 | .79 | 50 | 8.1 |
| 1340604C | | 1/4-18 | 1.14 | 3 | .79 | 50 | 9.4 |
| 1340606C | 3/8 | 3/8-18 | 1.22 | 3 | .79 | 50 | 12.5 |
| 1340804C | | 1/4-18 | 1.17 | 3 | .87 | 25 | 9.4 |
| 1340806C | 1/2 | 3/8-18 | 1.24 | 3 | .89 | 25 | 12.5 |
| 1340808C | | 1/2-14 | 1.29 | 3 | .87 | 25 | 28.1 |
| 1341212C | 3/4 | 3/4-14 | 1.52 | 3 | .97 | 25 | 50.1 |


139 Series



45° ELBOW- Forged
Hose Barb to Male NPTF

| Part Number | Hose ID A | NPTF Thread B | Length Centerline C | Number of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------------|---------------------|---------------------------|--------------------|---------------------|--------------|----------------------|
| 1390402C | | 1/8-27 | .96 | 3 | .79 | 100 | 3.4 |
| 1390404C | 1/4 | 1/4-18 | 1.01 | 3 | .79 | 25 | 6.2 |
| 1390602C | | 1/8-27 | 1.03 | 3 | .87 | 100 | 3.6 |
| 1390604C | 3/8 | 1/4-18 | 1.05 | 3 | .87 | 100 | 6.6 |
| 1390606C | | 3/8-18 | 1.10 | 3 | .87 | 25 | 8.9 |
| 1390804C | | 1/4-18 | 1.10 | 3 | .87 | 25 | 6.3 |
| 1390806C | 1/2 | 3/8-18 | 1.10 | 3 | .87 | 25 | 8.3 |
| 1390808C | | 1/2-14 | 1.15 | 3 | .87 | 50 | 12.3 |
| 1391208C | 3/4 | 1/2-14 | 1.15 | 3 | .87 | 25 | 13.7 |


142 Series

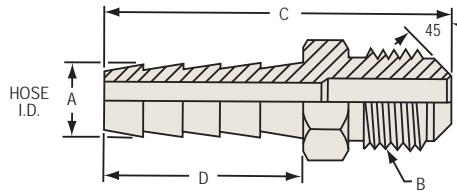

MALE HOSE BARB
45° SAE

| Part Number | Hose ID A | Tube OD | UNF Thread B | Length C | Hex | Number of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------------|------------|--------------------|-------------|------|--------------------|---------------------|--------------|----------------------|
| 1420307C | 3/16 | 1/4 | 7/16-20 | 1.50 | 7/16 | 3 | .75 | 100 | 2.7 |
| 1420407C | | 1/4 | 7/16-20 | 1.72 | 7/16 | 4 | .97 | 100 | 3.2 |
| 1420410C | 1/4 | 3/8 | 5/8-18 | 1.82 | 5/8 | 4 | .97 | 100 | 6.6 |
| 1420508C | 5/16 | 5/16 | 1/2-20 | 1.75 | 1/2 | 4 | .97 | 100 | 4.5 |
| 1420610C | | 3/8 | 5/8-18 | 1.82 | 5/8 | 4 | .97 | 50 | 7.6 |
| 1420612C | 3/8 | 1/2 | 3/4-16 | 1.97 | 3/4 | 4 | .97 | 50 | 9.9 |
| 1420812C | 1/2 | 1/2 | 3/4-16 | 1.97 | 3/4 | 4 | .97 | 50 | 10.3 |

143 Series

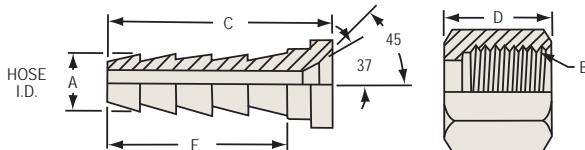


FEMALE SWIVEL HOSE BARB
45° SAE / 37°JIC (Dual Angle Seat)

| Part Number | Hose ID A | Tube OD | UNF Thread B | Stem Length C | Nut Length D | Hex | Number of Barbs | Barb Length E | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------------|------------|--------------------|---------------------|--------------------|--------|--------------------|---------------------|--------------|----------------------|
| 1430307K | 3/16 | 1/4 | 7/16-20 | 1.03 | .60 | 9/16 | 3 | .75 | 100 | 3.8 |
| 1430407K | | 1/4 | 7/16-20 | 1.25 | .60 | 9/16 | 4 | .97 | 100 | 4.1 |
| 1430408K | 1/4 | 5/16 | 1/2-20 | 1.31 | .68 | 5/8 | 4 | .97 | 100 | 5.1 |
| 1430508K | 5/16 | 5/16 | 1/2-20 | 1.31 | .68 | 5/8 | 4 | .97 | 100 | 5.1 |
| 1430612K | 3/8 | 1/2 | 3/4-16 | 1.34 | .84 | 7/8 | 4 | .97 | 100 | 10.2 |
| 1430812K | | 1/2 | 3/4-16 | 1.34 | .84 | 7/8 | 4 | .97 | 100 | 10.9 |
| 1430814K | 1/2 | 5/8 | 7/8-14 | 1.34 | .96 | 1-1/16 | 4 | .97 | 50 | 17.7 |

Standard Hose Fittings

144 Series

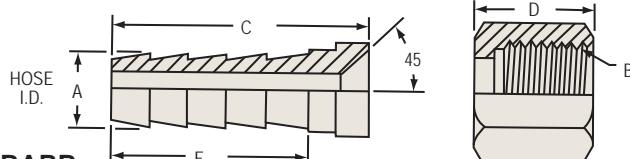


FEMALE SWIVEL HOSE BARB

45° SAE

| Part Number | Hose ID A | Tube OD | UNF Thread B | Stem Length C | Nut Length D | Hex | Number of Barbs | Barb Length E | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------------|------------|--------------------|---------------------|--------------------|-------|--------------------|---------------------|--------------|----------------------|
| 1440306K | 3/16 | 3/16 | 3/8-24 | 1.03 | .45 | 7/16 | 3 | .75 | 100 | 2.0 |
| 1440410K | 1/4 | 3/8 | 5/8-18 | 1.27 | .68 | 3/4 | 4 | .97 | 100 | 6.7 |
| 1440510K | 5/16 | 3/8 | 5/8-18 | 1.27 | .68 | 3/4 | 4 | .97 | 100 | 6.7 |
| 1440610K | 3/8 | 3/8 | 5/8-18 | 1.27 | .68 | 3/4 | 4 | .97 | 100 | 7.2 |
| 1440812K | 1/2 | 1/2 | 3/4-16 | 1.34 | .84 | 7/8 | 4 | .97 | 100 | 10.9 |
| 1441217K | 3/4 | 3/4 | 1-1/16 - 14 | 1.47 | 1.03 * | 1-1/4 | 4 | .97 | 25 | 25.0 |

* Notch in nut for SAE identification

145 Series

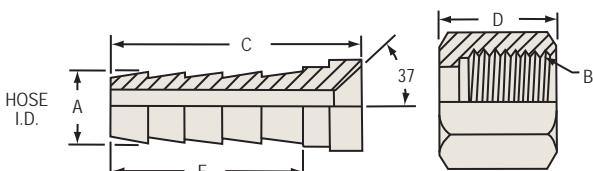


FEMALE SWIVEL HOSE BARB

37° J/C

| Part Number | Hose ID A | Tube OD | UNF Thread B | Stem Length C | Nut Length D | Hex | Number of Barbs | Barb Length E | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------------|------------|--------------------|---------------------|--------------------|-------|--------------------|---------------------|--------------|----------------------|
| 1450609K | 3/8 | 3/8 | 9/16-18 | 1.24 | .63 | 11/16 | 4 | .97 | 100 | 6.0 |
| 1451217K | 3/4 | 3/4 | 1-1/16 - 12 | 1.47 | 1.03 | 1-1/4 | 4 | .97 | 25 | 25.0 |

177 Series




HOSE BARB 90° ELBOW SPLICER- Forged



| Part Number | Hose ID A | Hose ID A1 | Length Centerline C | Number of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------------|---------------|---------------------------|--------------------|---------------------|--------------|----------------------|
| 1770202C | 1/8 | 1/8 | .73 | 3 | .46 | 25 | 2.5 |
| 1770303C | 3/16 | 3/16 | 1.05 | 3 | .79 | 25 | 3.1 |
| 1770402C | 1/4 | 1/8 | 1.05 | 3 | .79 | 25 | 3.1 |
| 1770404C | 1/4 | 1/4 | 1.05 | 3 | .79 | 25 | 3.0 |
| 1770505C | 5/16 | 5/16 | 1.15 | 3 | .79 | 25 | 4.9 |
| 1770604C | 3/8 | 1/4 | 1.15 | 3 | .79 | 25 | 6.2 |
| 1770606C | | 3/8 | 1.15 | 3 | .79 | 25 | 5.0 |
| 1770806C | 1/2 | 3/8 | 1.25 | 3 | .87 | 25 | 8.7 |
| 1770808C | 1/2 | 1/2 | 1.25 | 3 | .87 | 25 | 9.3 |
| 1771010C | 5/8 | 5/8 | 1.30 | 3 | .87 | 25 | 15.6 |
| 1771208C | 3/4 | 1/2 | 1.41 | 3 | .89 | 25 | 20.6 |
| 1771212C | 3/4 | 3/4 | 1.41 | 3 | .89 | 25 | 20.6 |

177-SS (304 stainless) Series

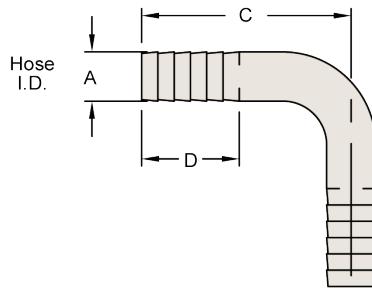


HOSE BARB 90° ELBOW SPLICER

| Part Number | Hose ID A | Barb Length D | Length Centerline C | Number of Barbs | Lbs. per 100 pcs. |
|-------------|--------------|---------------------|---------------------------|--------------------|----------------------|
| 1770202SS | 1/8 | .36 | .85 | 3 | 0.6 |
| 1770303SS | 3/16 | .54 | 1.68 | 5 | 1.9 |
| 1770404SS | 1/4 | .54 | 1.14 | 5 | 2.5 |
| 1770606SS | 3/8 | .56 | 1.46 | 5 | 4.0 |
| 1770808SS | 1/2 | .58 | 2.24 | 5 | 8.2 |

177-SS parts are packaged to order


178 and 178-SS (316 stainless) Series

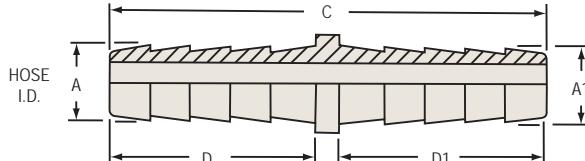

HOSE SPLICER

| Part Number | SS | Hose ID A | Hose ID A1 | Length C | Number of Barbs | Barb Length D | Barb Length D1 | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|----|--------------|---------------|-------------|--------------------|---------------------|----------------------|--------------|----------------------|
| 1780202C | | 1/8 | 1/8 | .97 | 3 | .46 | .46 | 100 | 0.6 |
| 1780303C | | 3/16 | 3/16 | 1.56 | 3 | .75 | .75 | 100 | 1.3 |
| 1780402C | | 1/4 | 1/8 | 1.55 | 4 | .97 | .46 | 100 | 2.0 |
| 1780404C | SS | 1/4 | 1/4 | 2.03 | 4 | .97 | .97 | 100 * | 2.3 |
| 1780505C | | 5/16 | 5/16 | 2.06 | 4 | .97 | .97 | 100 | 2.5 |
| 1780604C | | 3/8 | 1/4 | 2.06 | 4 | .97 | .97 | 100 | 3.7 |
| 1780606C | SS | 3/8 | 3/8 | 2.06 | 4 | .97 | .97 | 100 * | 4.0 |
| 1780806C | SS | 1/2 | 3/8 | 2.06 | 4 | .97 | .97 | 100 | 6.2 |
| 1780808C | SS | 1/2 | 1/2 | 2.06 | 4 | .97 | .97 | 50 * | 6.5 |
| 1781006C | | | 3/8 | 2.06 | 4 | .97 | .97 | 50 | 6.2 |
| 1781008C | | 5/8 | 1/2 | 2.06 | 4 | .97 | .97 | 50 | 6.8 |
| 1781010C | | | 5/8 | 2.06 | 4 | .97 | .97 | 50 | 7.0 |
| 1781208C | SS | 3/4 | 1/2 | 2.28 | 4 | 1.19 | .97 | 25 | 10.6 |
| 1781212C | SS | 3/4 | 3/4 | 2.50 | 4 | 1.19 | 1.19 | 25 * | 12.8 |
| 1781616C | | 1 | 1 | 3.00 | 5 | 1.44 | 1.44 | 10 | 22.5 |

* 178-SS packaged to order

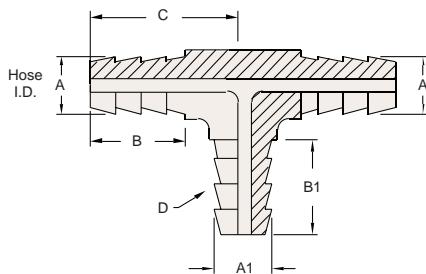


1790604C

HOSE BARB- Forged TEE SPlicer

| Part Number | Hose ID A | Hose ID A1 | Barb Length B | Barb Length B1 | Length Centerline C | NPTF Thread D | Number of Barbs | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|-----------|------------|---------------|----------------|---------------------|---------------|-----------------|-----------|-------------------|
| 1790202C | 1/8 | 1/8 | .46 | .46 | .71 | -- | 3 | 25 | 3.1 |
| 1790303C | 3/16 | 3/16 | .71 | .71 | .94 | -- | 3 | 100 | 3.1 |
| 1790402C | 1/4 | 1/8 | .71 | .46 | .94 | -- | 3 | 25 | 4.4 |
| 1790404C | 1/4 | 1/4 | .71 | .71 | .94 | -- | 3 | 25 | 3.4 |
| 1790505C | 5/16 | 5/16 | .79 | .79 | 1.18 | -- | 3 | 25 | 6.4 |
| 1790604C * | -- | .86 | -- | -- | 1.26 | 1/4-18 | 3 | 25 | 11.2 |
| 1790604BARB | 3/8 | 1/4 | .86 | .71 | 1.26 | -- | 3 | 25 | 6.5 |
| 1790606C | | 3/8 | .86 | .86 | 1.26 | -- | 3 | 25 | 8.0 |
| 1790806C | 1/2 | 3/8 | .90 | .90 | 1.26 | -- | 3 | 25 | 10.0 |
| 1790808C | | 1/2 | .86 | .86 | 1.26 | -- | 3 | 25 | 10.4 |
| 1791010C | 5/8 | 5/8 | .90 | .90 | 1.33 | -- | 3 | 25 | 15.8 |
| 1791208C | 3/4 | 1/2 | .90 | .90 | 1.41 | -- | 3 | 25 | 22.5 |
| 1791212C | | 3/4 | .90 | .90 | 1.41 | -- | 3 | 20 | 37.0 |

* 1790604C as pictured above

179-SS (304 stainless) Series

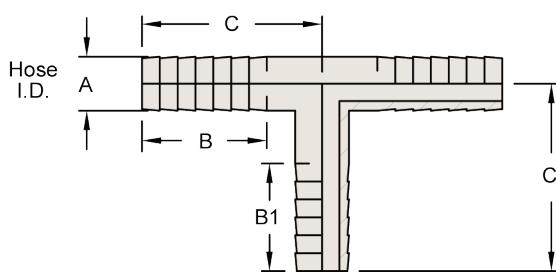

HOSE BARB TEE SPlicer

| Part Number | Hose ID A | Barb Length B | Barb Length B1 | Length Centerline C | Number of Barbs | Lbs. per 100 pcs. |
|-------------|-----------|---------------|----------------|---------------------|-----------------|-------------------|
| 1790202SS | 1/8 | .50 | .50 | .62 | 4 | 1.3 |
| 1790303SS | 3/16 | .56 | .56 | .70 | 5 | 1.5 |
| 1790404SS | 1/4 | .63 | .56 * | .94 | 6 / 5 * | 2.5 |
| 1790606SS | 3/8 | .55 | .55 | 1.01 | 5 | 3.2 |
| 1790808SS | 1/2 | .59 | .55 | 1.01 | 5 | 5.6 |

* On Drop - 5 Barbs

179-SS parts are packaged to order

Welding Hose Fittings


Features:

- Dixon Brass offers 16 welding hose fitting in 4 different series.
- Our welding hose fittings are manufactured to exacting specifications.
- All welding hose fittings are packaged for easy storage and identification. Female swivel welding hose fittings (152 and 154 series) are sold in stem and swivel nut sets. Pricing information on separate components is available upon request.
- It is recommended that hose assemblies be fabricated using hose clamps or crimped ferrules in conjunction with hose barbs.

The following letter size designations are commonly used for both oxygen and fuel gas fitting size identification:

A-Size 3/8-24 UNF
B-Size 9/16-18 UNF

152 Series

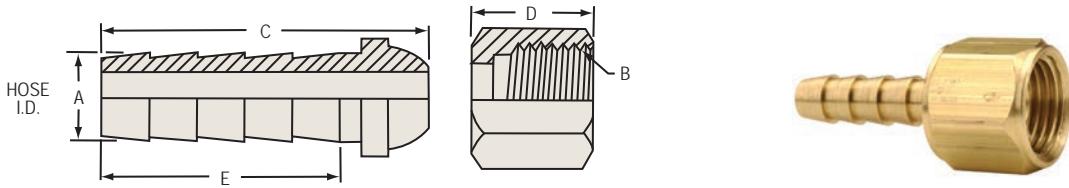


WELDING HOSE COUPLING

Right Hand Thread for Oxygen Line

| Part Number | Hose ID A | Right UNF Thread B | Stem Length C | Nut Length D | Hex | Number of Barbs | Barb Length E | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------------|--------------------------|---------------------|--------------------|-------|-----------------------|---------------------|--------------|----------------------|
| 1520306K | 3/16 | 3/8-24 | 1.32 | .45 | 7/16 | 4 | .97 | 100 | 2.3 |
| 1520309K | | 9/16-18 | 1.43 | .63 | 11/16 | 4 | .97 | 100 | 6.1 |
| 1520409K | 1/4 | 9/16-18 | 1.43 | .63 | 11/16 | 4 | .97 | 100 | 6.2 |
| 1520509K | 5/16 | 9/16-18 | 1.43 | .63 | 11/16 | 4 | .97 | 100 | 6.6 |
| 1520609K | 3/8 | 9/16-18 | 1.43 | .63 | 11/16 | 4 | .97 | 100 | 6.9 |


154 Series

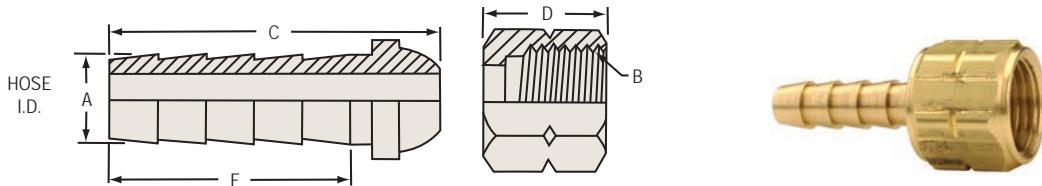


WELDING HOSE COUPLING

Left Hand Thread for Acetylene Line


| Part Number | Hose ID A | Left UNF Thread B | Stem Length C | Nut Length D | Hex | Number of Barbs | Barb Length E | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------------|-------------------------|---------------------|--------------------|-------|-----------------------|---------------------|--------------|----------------------|
| 1540306K | 3/16 | 3/8-24 | 1.32 | .45 | 7/16 | 4 | .97 | 100 | 2.3 |
| 1540309K | | 9/16-18 | 1.43 | .63 | 11/16 | 4 | .97 | 100 | 6.1 |
| 1540409K | 1/4 | 9/16-18 | 1.43 | .63 | 11/16 | 4 | .97 | 100 | 6.2 |
| 1540509K | 5/16 | 9/16-18 | 1.43 | .63 | 11/16 | 4 | .97 | 100 | 6.6 |
| 1540609K | 3/8 | 9/16-18 | 1.43 | .63 | 11/16 | 4 | .97 | 100 | 6.9 |

**WELDING HOSE ADAPTER***Right Hand Thread*


| Part Number | Right UNF Thread B | NPTF Thread B' | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|-----------------------|-------------------|-------------|-------|--------------|----------------------|
| 1560904C | 9/16-18 | 1/4-18 | 1.30 | 5/8 | 100 | 5.8 |
| 1560906C | 9/16-18 | 3/8-18 | 1.30 | 11/16 | 50 | 8.9 |

**WELDING HOSE CONNECTOR***Right Hand Thread*

| Part Number | Right UNF Thread B | Right UNF Thread B' | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|-----------------------|------------------------|-------------|-------|--------------|----------------------|
| 1560909C | 9/16-18 | 9/16-18 | 1.25 | 11/16 | 100 | 6.9 |

**WELDING HOSE ADAPTER***Left Hand Thread*


| Part Number | Left UNF Thread B | NPTF Thread B' | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|----------------------|-------------------|-------------|-------|--------------|----------------------|
| 1580904C | 9/16-18 | 1/4-18 | 1.30 | 5/8 | 100 | 5.8 |
| 1580906C | 9/16-18 | 3/8-18 | 1.30 | 11/16 | 50 | 8.9 |

**WELDING HOSE CONNECTOR***Left Hand Thread*

| Part Number | Left UNF Thread B | Left UNF Thread B' | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|----------------------|-----------------------|-------------|-------|--------------|----------------------|
| 1580909C | 9/16-18 | 9/16-18 | 1.25 | 11/16 | 100 | 6.9 |

Brass Ferrules and Crimping Tool

200 Series



STAMPED BRASS FERRULE

| Part Number | Reference No. | Ferrule ID A | Ferrule Length C | Hole Size B | Gauge | Std. Pkg. * | Lbs. per 100 pcs. |
|-----------------|---------------|--------------|------------------|-------------|-------|-------------|-------------------|
| 2004000C | 619 | .400 | .47 | .27 | .020 | 100 | .40 |
| 2004530C | 769 | .450 | .56 | .34 | .016 | 50 | .44 |
| 2004750C | 4750 | .478 | .69 | .33 | .024 | 50 | .76 |
| 2005000C | 624 | .500 | .50 | .34 | .016 | 50 | .40 |
| 2005005C | 7322 | .500 | 1.00 | .34 | .024 | 50 | 1.20 |
| 2005250C | 625 | .525 | .50 | .34 | .016 | 50 | .42 |
| 2005255C | 7323 | .525 | 1.00 | .38 | .024 | 50 | 1.18 |
| 2005310C | 7324 | .531 | 1.00 | .44 | .024 | 50 | 1.20 |
| 2005500C | 626 | .550 | .48 | .38 | .016 | 50 | .42 |
| 2005620C | 7325 | .562 | 1.00 | .44 | .024 | 50 | 1.28 |
| 2005930C | 7326 | .593 | 1.00 | .44 | .024 | 50 | 1.34 |
| 2006250C | II | .625 | .50 | .50 | .019 | 50 | .58 |
| 2006255C | 7327 | .625 | 1.00 | .44 | .024 | 50 | 1.44 |
| 2006500C | HH | .650 | .50 | .50 | .019 | 50 | .60 |
| 2006560C | 7328 | .656 | 1.00 | .44 | .024 | 50 | 1.48 |
| 2006750C | GG | .675 | .52 | .50 | .019 | 100 | .86 |
| 2006900C | 7329 | .687 | 1.00 | .50 | .024 | 50 | 1.52 |
| 2007180C | 7330A | .718 | 1.00 | .63 | .024 | 50 | 1.62 |
| 2007250C | EE | .725 | .53 | .50 | .019 | 50 | .76 |
| 2007500C | DD | .750 | .53 | .50 | .019 | 50 | .96 |
| 2007505C | 7331 | .750 | 1.00 | .63 | .024 | 50 | 1.74 |
| 2007750C | CC | .775 | .53 | .50 | .016 | 50 | .90 |
| 2007810C | 7332 | .781 | 1.00 | .63 | .024 | 50 | 1.84 |
| 2008120C | 7333 | .812 | 1.00 | .63 | .024 | 50 | 1.94 |
| 2008750C | 7244A | .875 | .84 | .69 | .024 | 25 | 1.66 |
| 2009250C | 7113 | .925 | .84 | .69 | .025 | 50 | 1.86 |
| 2009750C | 5028A | .975 | .84 | .69 | .024 | 25 | 1.96 |
| 2009950C | 7104A | 1.150 | .84 | .88 | .024 | 50 | 2.36 |
| 2001025C | 7114A | 1.025 | .84 | .69 | .024 | 25 | 2.40 |
| 2001100C | 5027 | 1.100 | .84 | .81 | .023 | 25 | 2.40 |
| 2001175C | 7088A | 1.175 | .84 | .88 | .024 | 25 | 2.50 |
| 2001225C | 875K | 1.225 | .875 | .875 | .025 | 25 | 2.50 |
| 2001500C | 1500 | 1.500 | .875 | 1.12 | .025 | 25 | 3.50 |

* Sold in full bag quantity only



200FC FERRULE CRIMPING TOOL

| Standard Die Part Number | Bore Die * | Hose OD ** |
|--------------------------|------------|-------------|
| 200FC6A | .625 | .640 - .671 |
| 200FC5 | .578 | .590 - .625 |
| 200FC4B | .531 | .540 - .562 |
| 200FC4A | .484 | .490 - .520 |
| 200FC6B | .687 | .690 - .710 |

Features:

- Professional quality ferrule crimper provides fixed mount production capability or job-site portability
- Shipped with 5 standard die sets for 1/4" single braid hose through 3/8" 2-braid hose
- Optional die sets available for 3/16" and 1/2" hoses

* See ferrule ID above

** Diameter with barbed insert installed

| Optional Die Part Number | Bore Die * | Hose OD ** |
|--------------------------|------------|-------------|
| 200FC3 | .375 | .385 - .406 |
| 200FC8A | .750 | .760 - .781 |
| 200FC8B | .812 | .820 - .843 |

Re-usable Hose Fittings

Applications:

Reusable fittings are used when a more durable hose connection is required or ease of making a repair is a major consideration.

Features:

- Dixon Brass offers over 110 re-usable fittings in 10 different series.
- All re-usable fittings are of heavy duty construction.

Three variables must be determined before ordering.

1. I.D. of hose to be used with fitting
2. O.D. of hose to be used with fitting
3. Connection thread size desired

Part number for re-usable hose fitting sets (183, 185 and 187) series are easy to understand and use. The first three digits of the seven digit part number signify a specific product series. The fourth digit signifies the hose I.D. used with the fitting (measured in sixteenths of an inch). The fifth and sixth digits signify the hose O.D. used with the fitting (measured in sixteenths of an inch).

Note: Recommended for rubber covered hose only.

How to Use Dixon Brass Reusable Hose Fitting Part Numbers

1836116

SERIES IDENTIFICATION

1836116


HOSE I.D. (Measured in sixteenths of an inch)

1836116


HOSE O.D. (Measured in sixteenths of an inch)

1836116

THREAD SIZE (Measured in sixteenths of an inch)

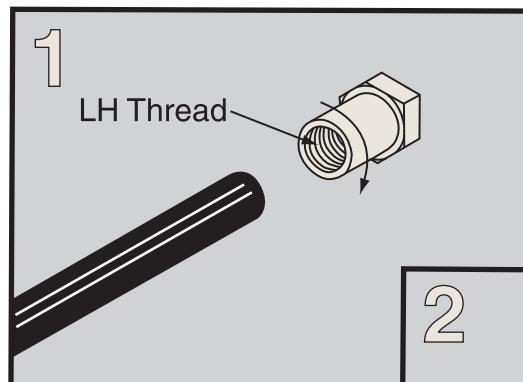


Simply slip and twist ferrule on end of hose which has been trimmed flush. No skiving necessary.

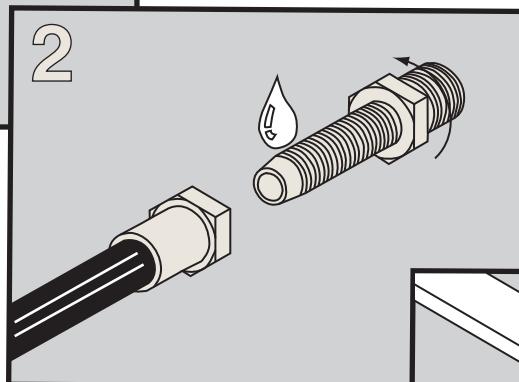


Apply a drop or two of lubricant to fitting before inserting ferrule.

How to Install Reusable Fittings without Skiving or Crimping

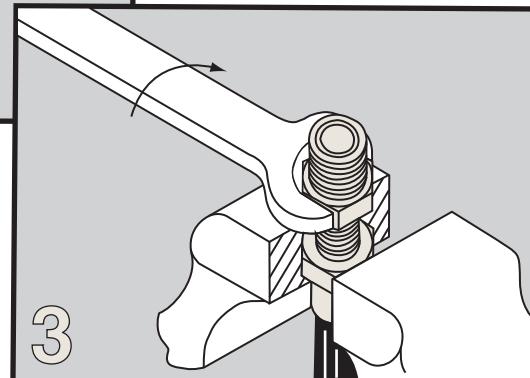

Turn reusable fitting into ferrule. Hose is expanded inside ferrule for perfect fit.

180 and 180-SS Series




REUSABLE FERRULE

| Standard Brass Part Number | 303 SS | Hose ID | Hose OD E | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|----------------------------|--------|---------|-----------|----------|--------|-----------|-------------------|
| 1800408F | SS | | 1/2 | 1.02 | 11/16 | 100 * | 5.3 |
| 1800409F | SS | 1/4 | 9/16 | 1.02 | 3/4 | 50 * | 6.3 |
| 1800410F | SS | | 5/8 | 1.02 | 13/16 | 50 * | 7.3 |
| 1800509F | SS | | 9/16 | 1.10 | 3/4 | 100 * | 6.6 |
| 1800510F | SS | 5/16 | 5/8 | 1.10 | 13/16 | 50 * | 7.8 |
| 1800511F | | | 11/16 | 1.10 | 7/8 | 50 | 8.6 |
| 1800610F | SS | | 5/8 | 1.10 | 13/16 | 50 * | 7.2 |
| 1800611F | SS | 3/8 | 11/16 | 1.10 | 7/8 | 50 * | 8.3 |
| 1800612F | SS | | 3/4 | 1.10 | 7/8 | 50 * | 6.7 |
| 1800814F | SS | | 7/8 | 1.69 | 1-1/16 | 25 * | 15.8 |
| 1800815F | SS | 1/2 | 15/16 | 1.69 | 1-1/8 | 25 * | 17.5 |
| 1800816F | | | 1 | 1.69 | 1-3/16 | 20 | 19.5 |

* 180-SS packaged to order

182 and 182-SS Series

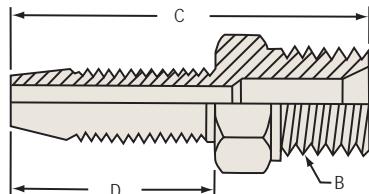


REUSABLE MALE STEM

| Standard Brass Part Number | 303 SS | Hose ID | NPTF ** Thread B | Length C | Stem Length D | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|----------------------------|--------|---------|------------------|----------|---------------|-------|-----------|-------------------|
| 1820402S | SS | | 1/8-27 | 1.68 | 1.07 | 9/16 | 100 * | 4.1 |
| 1820404S | SS | 1/4 | 1/4-18 | 1.86 | 1.07 | 9/16 | 100 * | 5.1 |
| 1820406S | | | 3/8-18 | 1.86 | 1.07 | 11/16 | 50 | 6.5 |
| 1820504S | SS | | 1/4-18 | 1.96 | 1.17 | 9/16 | 50 * | 5.5 |
| 1820506S | SS | 5/16 | 3/8-18 | 1.96 | 1.17 | 11/16 | 50 | 6.9 |
| 1820604S | SS | | 1/4-18 | 1.96 | 1.17 | 9/16 | 100 * | 6.4 |
| 1820606S | SS | 3/8 | 3/8-18 | 1.96 | 1.17 | 11/16 | 50 * | 7.8 |
| 1820608S | | | 1/2-14 | 2.17 | 1.17 | 7/8 | 25 | 12.7 |
| 1820804S | | | 1/4-18 | 2.43 | 1.64 | 11/16 | 50 | 12.3 |
| 1820806S | SS | 1/2 | 3/8-18 | 2.43 | 1.64 | 11/16 | 50 * | 11.0 |
| 1820808S | SS | | 1/2-14 | 2.64 | 1.64 | 7/8 | 25 * | 16.3 |

* 182-SS packaged to order

** NPT thread on 182-SS




REUSABLE MALE FITTING - UNASSEMBLED

| Standard Brass Part Number | 303 SS | Hose ID | Hose OD | NPTF ** Thread B | Stem Hex | Ferrule Hex | Std. Pkg. | Lbs. per 100 pcs. |
|----------------------------|--------|---------|---------|------------------|----------|-------------|-----------|-------------------|
| 1834082K | SS | | 1/2 | 1/8-27 | 9/16 | 11/16 | 100 * | 9.4 |
| 1834092K | SS | 1/4 | 9/16 | 1/8-27 | 9/16 | 3/4 | 100 * | 10.5 |
| 1834102K | SS | | 5/8 | 1/8-27 | 9/16 | 13/16 | 100 * | 11.4 |
| 1834084K | SS | | 1/2 | 1/4-18 | 9/16 | 11/16 | 50 * | 10.4 |
| 1834094K | SS | 1/4 | 9/16 | 1/4-18 | 9/16 | 3/4 | 50 * | 11.4 |
| 1834104K | SS | | 5/8 | 1/4-18 | 9/16 | 13/16 | 50 * | 12.3 |
| 1834086K | | | 1/2 | 3/8-18 | 11/16 | 11/16 | 50 | 11.8 |
| 1834096K | | 1/4 | 9/16 | 3/8-18 | 11/16 | 3/4 | 50 | 12.8 |
| 1834106K | | | 5/8 | 3/8-18 | 11/16 | 13/16 | 50 | 13.8 |
| 1835094K | SS | | 9/16 | 1/4-18 | 9/16 | 3/4 | 50 * | 12.1 |
| 1835104K | SS | 5/16 | 5/8 | 1/4-18 | 9/16 | 13/16 | 50 * | 13.4 |
| 1835114K | | | 11/16 | 1/4-18 | 9/16 | 7/8 | 50 | 14.1 |
| 1835096K | | | 9/16 | 3/8-18 | 11/16 | 3/4 | 50 | 13.5 |
| 1835106K | | 5/16 | 5/8 | 3/8-18 | 11/16 | 13/16 | 50 | 14.7 |
| 1835116K | | | 11/16 | 3/8-18 | 11/16 | 7/8 | 50 | 15.5 |
| 1836104K | SS | | 5/8 | 1/4-18 | 9/16 | 13/16 | 50 * | 13.6 |
| 1836114K | SS | 3/8 | 11/16 | 1/4-18 | 9/16 | 7/8 | 50 * | 14.7 |
| 1836124K | SS | | 3/4 | 1/4-18 | 9/16 | 7/8 | 50 * | 13.1 |
| 1836106K | SS | | 5/8 | 3/8-18 | 11/16 | 13/16 | 50 * | 15.0 |
| 1836116K | SS | 3/8 | 11/16 | 3/8-18 | 11/16 | 13/16 | 50 * | 16.1 |
| 1836126K | SS | | 3/4 | 3/8-18 | 11/16 | 7/8 | 50 * | 14.6 |
| 1836108K | | | 5/8 | 1/2-14 | 7/8 | 13/16 | 50 | 19.9 |
| 1836118K | | 3/8 | 11/16 | 1/2-14 | 7/8 | 7/8 | 50 | 21.0 |
| 1836128K | | | 3/4 | 1/2-14 | 7/8 | 7/8 | 50 | 19.4 |
| 1838144K | | | 7/8 | 1/4-18 | 11/16 | 1-1/16 | 25 | 28.1 |
| 1838154K | | 1/2 | 15/16 | 1/4-18 | 11/16 | 1-1/8 | 25 | 29.8 |
| 1838164K | | | 1 | 1/4-18 | 11/16 | 1-3/16 | 25 | 31.8 |
| 1838146K | SS | | 7/8 | 3/8-18 | 11/16 | 1-1/16 | 25 * | 26.8 |
| 1838156K | SS | 1/2 | 15/16 | 3/8-18 | 11/16 | 1-1/8 | 25 * | 28.5 |
| 1838166K | | | 1 | 3/8-18 | 11/16 | 1-3/16 | 25 | 30.5 |
| 1838148K | SS | | 7/8 | 1/2-14 | 7/8 | 1-1/16 | 20 * | 32.1 |
| 1838158K | SS | 1/2 | 15/16 | 1/2-14 | 7/8 | 1-1/8 | 20 * | 33.8 |
| 1838168K | | | 1 | 1/2-14 | 7/8 | 1-3/16 | 20 | 35.8 |

* 183-SS packaged to order


** NPT thread on 183-SS

184 Series

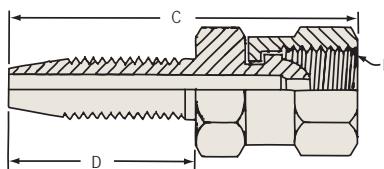
**REUSABLE FEMALE SWIVEL STEM**

| Part Number | Hose ID A | NPSM Thread B | Length C | Stem Length D | Swivel Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|--------------|------------------|-------------|------------------|---------------|--------------|----------------------|
| 1840404A | 1/4 | 1/4-18 | 1.94 | 1.07 | 11/16 | 50 | 7.8 |
| 1840406A | | 3/8-18 | 2.07 | 1.07 | 13/16 | 50 | 11.3 |
| 1840504A | 5/16 | 1/4-18 | 2.12 | 1.17 | 11/16 | 50 | 9.4 |
| 1840604A | | 1/4-18 | 2.12 | 1.17 | 11/16 | 50 | 9.1 |
| 1840606A | 3/8 | 3/8-18 | 2.20 | 1.17 | 13/16 | 50 | 12.5 |
| 1840808A | 1/2 | 1/2-14 | 2.86 | 1.64 | 15/16 | 25 | 19.0 |


185 Series

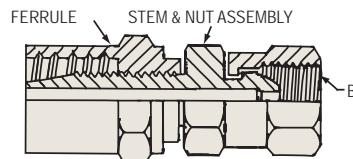**REUSABLE FEMALE SWIVEL FITTING - UNASSEMBLED**


| Part Number | Hose ID A | Hose OD | NPSM Thread B | Swivel Hex | Ferrule Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|--------------|---------|------------------|---------------|----------------|--------------|----------------------|
| 1854084K | | 1/2 | 1/4-18 | 11/16 | 11/16 | 50 | 13.2 |
| 1854094K | 1/4 | 9/16 | 1/4-18 | 11/16 | 3/4 | 50 | 14.2 |
| 1854104K | | 5/8 | 1/4-18 | 11/16 | 13/16 | 50 | 15.1 |
| 1854086K | | 1/2 | 3/8-18 | 13/16 | 11/16 | 50 | 16.6 |
| 1854096K | 1/4 | 9/16 | 3/8-18 | 13/16 | 3/4 | 50 | 17.6 |
| 1854106K | | 5/8 | 3/8-18 | 13/16 | 13/16 | 50 | 18.6 |
| 1855094K | | 9/16 | 1/4-18 | 11/16 | 3/4 | 50 | 16.0 |
| 1855104K | 5/16 | 5/8 | 1/4-18 | 11/16 | 13/16 | 50 | 17.3 |
| 1855114K | | 11/16 | 1/4-18 | 11/16 | 7/8 | 50 | 18.0 |
| 1856104K | | 5/8 | 1/4-18 | 11/16 | 13/16 | 50 | 16.3 |
| 1856114K | 3/8 | 11/16 | 1/4-18 | 11/16 | 7/8 | 50 | 17.4 |
| 1856124K | | 3/4 | 1/4-18 | 11/16 | 7/8 | 50 | 15.8 |
| 1856106K | | 5/8 | 3/8-18 | 13/16 | 13/16 | 50 | 19.7 |
| 1856116K | 3/8 | 11/16 | 3/8-18 | 13/16 | 7/8 | 50 | 20.8 |
| 1856126K | | 3/4 | 3/8-18 | 13/16 | 7/8 | 50 | 19.3 |
| 1858148K | | 7/8 | 1/2-14 | 15/16 | 1-1/16 | 20 | 34.8 |
| 1858158K | 1/2 | 15/16 | 1/2-14 | 15/16 | 1-1/8 | 20 | 36.5 |
| 1858168K | | 1 | 1/2-14 | 15/16 | 1-3/16 | 20 | 38.5 |

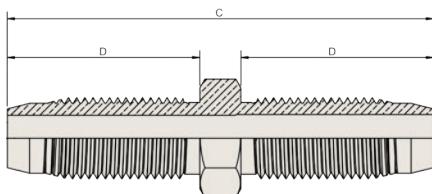
REUSABLE SPlicer STEM

| Part Number | Hose ID | Length C | Stem Length D | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|---------|-------------|------------------|------|--------------|----------------------|
| 1860404S | 1/4 | 2.39 | 1.07 | 9/16 | 100 | 6 |
| 1860606S | 3/8 | 2.59 | 1.17 | 5/8 | 50 | 9 |


**REUSABLE HOSE
SPlicer - UNASSEMBLED**

| Part Number | Hose ID | Hose OD | Length C | Splicer Hex | Ferrule Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|---------|---------|-------------|----------------|----------------|--------------|----------------------|
| 1870408K | | 1/2 | 2.39 | 9/16 | 11/16 | 50 | 16.2 |
| 1870409K | 1/4 | 9/16 | 2.39 | 9/16 | 3/4 | 50 | 18.2 |
| 1870410K | | 5/8 | 2.39 | 9/16 | 13/16 | 50 | 20.1 |
| 1870610K | | 5/8 | 2.59 | 5/8 | 13/16 | 25 | 23.1 |
| 1870611K | 3/8 | 11/16 | 2.59 | 5/8 | 7/8 | 25 | 25.5 |
| 1870612K | | 3/4 | 2.59 | 5/8 | 7/8 | 25 | 22.3 |

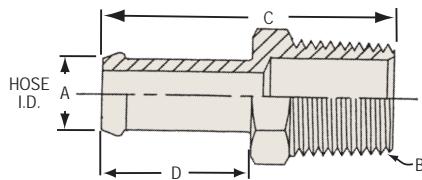
BEADED HOSE BARBS

| Part Number | Hose ID A | NPTF Thread B | Length C | Hex | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|--------------|------------------|-------------|--------|------------------|--------------|----------------------|
| 268B0402 | | 1/8-27 | 1.18 | 1/2 | .62 | 100 | 2.4 |
| 268B0404 | 1/4 | 1/4-18 | 1.41 | 9/16 | .62 | 100 | 3.6 |
| 268B0502 | | 1/8-27 | 1.22 | 1/2 | .62 | 100 | 2.5 |
| 268B0504 | 5/16 | 1/4-18 | 1.41 | 9/16 | .62 | 50 | 3.9 |
| 268B0602 | | 1/8-27 | 1.48 | 1/2 | .88 | 100 | 3.7 |
| 268B0604 | 3/8 | 1/4-18 | 1.67 | 9/16 | .88 | 100 | 4.4 |
| 268B0606 | | 3/8-18 | 1.67 | 11/16 | .88 | 50 | 5.8 |
| 268B0806 | | 3/8-18 | 1.67 | 11/16 | .88 | 50 | 6.1 |
| 268B0808 | 1/2 | 1/2-14 | 1.88 | 7/8 | .88 | 50 | 10.9 |
| 268B1008 | 5/8 | 1/2-14 | 1.88 | 7/8 | .88 | 25 | 11.9 |
| 268B1208 | 3/4 | 1/2-14 | 1.88 | 7/8 | .88 | 50 | 13.7 |
| 268B1212 | | 3/4-14 | 1.88 | 1-1/16 | .88 | 25 | 15.4 |

Lok-on Hose Fittings

Lok-on Hose Fittings

Assembly Instructions

1. Trim hose end with a smooth square cut.
2. Lubricate either push-on fitting, hose or both.
3. Insert push-on fitting into hose until first barb is in the hose.
4. Place end of fitting against a flat object (bench, wall, etc.) and grip the hose one inch from the end. Push with a steady force until the end of the hose is covered by the yellow plastic cap.

- CAUTION: Push-on fittings will properly grip push-on hose only when pushed all the way in, with the cut end of the hose completely concealed by the plastic cap.



Disassembly Instructions

1. Leaving push-on fitting in place, make a 1" cut in the hose along the barbed end of the fitting. Note: Be careful not to nick barbs when cutting the hose.
2. With firm grip on hose, give a sharp downward pull to release the fitting from the hose

270AT Hose Fitting Installation Tool


Features:

- Cuts push-on style hose and inserts the fitting
- Built-in cutter slices through 1/4" - 3/4" I.D. reinforced push-on hose without fraying
- Clamp hose into tool's vice and apply light pressure on handle to drive in the fitting
- Tool has four 7/16" diameter mounting holes for bench mounting
- Overall size is 13-1/2" long x 2-3/8" wide x 7" height

| Part Number | Description |
|----------------|---------------------------------|
| 270AT-RPLBlade | Replacement blade for the 270AT |



271 Series

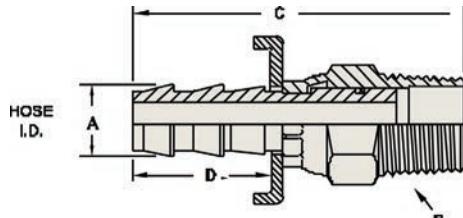

NPTF-MALE

SWIVEL HOSE BARB


National Pipe Tapered - Dryseal

| Part Number | Hose ID A | NPTF Thread B | Length C | Hex | No. of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------------|------------------|-------------|--------|-----------------|------------------|--------------|----------------------|
| 2710402C | 1/4 | 1/8-27 | 2.09 | 9/16 | 2 | .81 | 100 | 6.8 |
| 2710404C | | 1/4-18 | 2.02 | 9/16 | 2 | .87 | 100 | 6.1 |
| 2710604C | 3/8 | 1/4-18 | 2.12 | 9/16 | 2 | .97 | 50 | 7.4 |
| 2710606C | | 3/8-18 | 2.12 | 11/16 | 2 | .97 | 50 | 9.1 |
| 2710806C | 1/2 | 3/8-18 | 2.12 | 11/16 | 2 | .97 | 25 | 10.4 |
| 2710808C | | 1/2-14 | 2.33 | 7/8 | 2 | .97 | 20 | 14.8 |
| 2711212C | 3/4 | 3/4-14 | 2.80 | 1-1/16 | 3 | 1.45 | 10 | 24.8 |

Note: Swivel for assembly convenience only, not for live swivel applications, **120 maximum PSI**

**NPTF-MALE
HOSE BARB**

National Pipe Tapered - Dryseal

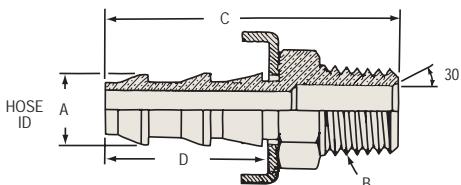

| Part Number | 303 SS | Hose ID A | NPTF ** Thread B | Length C | Hex | Number of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------|-----------|------------------|----------|--------|-----------------|---------------|-----------|-------------------|
| 2720402C | SS | | 1/8-27 | 1.42 | 7/16 | 2 | .77 | 100 * | 2.7 |
| 2720404C | SS | 1/4 | 1/4-18 | 1.61 | 9/16 | 2 | .77 | 100 * | 4.3 |
| 2720406C | | | 3/8-18 | 1.61 | 11/16 | 2 | .77 | 50 | 5.6 |
| 2720502C | | 5/16 | 1/8-27 | 1.42 | 7/16 | 2 | .77 | 100 | 3.1 |
| 2720504C | | | 1/4-18 | 1.61 | 9/16 | 2 | .77 | 50 | 4.5 |
| 2720602C | | | 1/8-27 | 1.60 | 9/16 | 2 | .92 | 50 | 5.0 |
| 2720604C | SS | | 1/4-18 | 1.76 | 9/16 | 2 | .92 | 50 * | 5.3 |
| 2720606C | SS | 3/8 | 3/8-18 | 1.76 | 11/16 | 2 | .92 | 50 * | 6.7 |
| 2720608C | | | 1/2-14 | 1.97 | 7/8 | 2 | .92 | 25 | 11.0 |
| 2720612C | | | 3/4-14 | 1.97 | 1-1/16 | 2 | .92 | 25 | 15.6 |
| 2720804C | SS | | 1/4-18 | 1.86 | 11/16 | 2 | 1.02 | 25 | 8.6 |
| 2720806C | SS | | 3/8-18 | 1.86 | 11/16 | 2 | 1.02 | 50 * | 7.1 |
| 2720808C | SS | 1/2 | 1/2-14 | 2.07 | 7/8 | 2 | 1.02 | 25 * | 11.9 |
| 2720812C | | | 3/4-14 | 2.07 | 1-1/16 | 2 | 1.02 | 25 | 16.3 |
| 2721006C | | | 3/8-18 | 2.34 | 3/4 | 3 | 1.50 | 25 | 12.0 |
| 2721008C | | 5/8 | 1/2-14 | 2.55 | 7/8 | 3 | 1.50 | 25 | 14.3 |
| 2721012C | | | 3/4-14 | 2.55 | 1-1/16 | 3 | 1.50 | 25 | 19.0 |
| 2721208C | SS | | 1/2-14 | 2.55 | 7/8 | 3 | 1.50 | 25 * | 20.0 |
| 2721212C | SS | 3/4 | 3/4-14 | 2.55 | 1-1/16 | 3 | 1.50 | 20 * | 19.4 |
| 2721612C | | 1 | 3/4-14 | 2.93 | 1-1/4 | 3 | 1.50 | 10 | 43.7 |
| 2721616C | SS | | 1 - 11-1/2++ | 3.11 | 1-3/8 | 3 | 1.50 | 5 * | 49.4 |

- Add a 'BC' suffix to the part number for the brass cap option. Not available for 5/16" I.D. hose size.

* 272-SS are packaged to order

** NPT thread on 272-SS

++capped


272W Series

**Yellow Lok-on Cap**

| Part Number | Hose ID | Std. Pkg. * |
|-------------|---------|-------------|
| 2720400W | 1/4 | 100 |
| 2720500W | 5/16 | 100 |
| 2720600W | 3/8 | 100 |
| 2720800W | 1/2 | 100 |
| 2721000W | 5/8 | 50 |
| 2721200W | 3/4 | 50 |
| 2721600W | 1 | 25 |

- Sold in full bag quantity only


273 Series

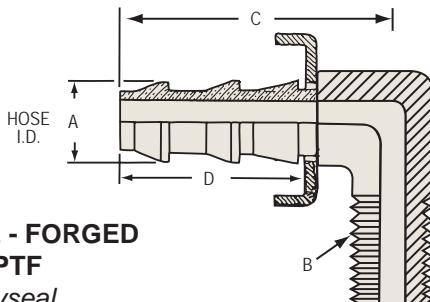**NPTF - 90° ELBOW MALE - FORGED****HOSE BARB TO MALE NPTF**

National Pipe Tapered - Dryseal

| Part Number | Hose ID A | NPTF Thread B | Length Centerline C | No. of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|-----------|---------------|---------------------|--------------|---------------|-----------|-------------------|
| 2730402C | 1/4 | 1/8-27 | 1.22 | 2 | .82 | 100 | 3.7 |
| 2730404C | | 1/4-18 | 1.40 | 2 | .82 | 50 | 6.4 |
| 2730602C | | 1/8-27 | 1.35 | 2 | .92 | 50 | 4.3 |
| 2730604C | 3/8 | 1/4-18 | 1.40 | 2 | .92 | 50 | 7.8 |
| 2730606C | | 3/8-18 | 1.51 | 2 | .92 | 25 | 9.5 |
| 2730806C | 1/2 | 3/8-18 | 1.54 | 2 | 1.02 | 25 | 13.2 |
| 2730808C | | 1/2-14 | 1.61 | 2 | 1.02 | 25 | 17.1 |
| 2731208C | 3/4 | 1/2-14 | 2.15 | 3 | 1.50 | 10 | 25.3 |
| 2731212C | | 3/4-14 | 2.23 | 3 | 1.50 | 10 | 28.1 |

274 Series

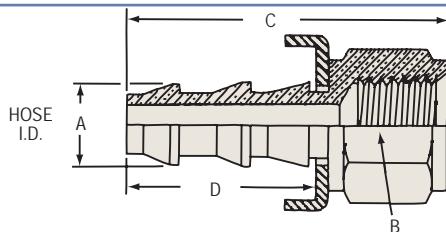**NPTF-FEMALE
HOSE BARB**

National Pipe Tapered - Dryseal

| Part Number | Hose ID A | NPTF Thread B | Length C | Hex | No. of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|------------|---------------|----------|--------|--------------|---------------|-----------|-------------------|
| 2740402C | | 1/8-27 | 1.32 | 1/2 | 2 | .82 | 100 | 2.8 |
| 2740404C | 1/4 | 1/4-18 | 1.51 | 5/8 | 2 | .82 | 100 | 4.7 |
| 2740406C | | 3/8-18 | 1.51 | 3/4 | 2 | .82 | 50 | 5.6 |
| 2740502C | 5/16 | 1/8-27 | 1.32 | 1/2 | 2 | .82 | 100 | 3.4 |
| 2740504C | | 1/4-18 | 1.51 | 5/8 | 2 | .82 | 50 | 4.9 |
| 2740602C | | 1/8-27 | 1.47 | 9/16 | 2 | .97 | 50 | 5.6 |
| 2740604C | | 1/4-18 | 1.66 | 5/8 | 2 | .97 | 50 | 5.5 |
| 2740606C | 3/8 | 3/8-18 | 1.66 | 3/4 | 2 | .97 | 50 | 6.5 |
| 2740608C | | 1/2-14 | 1.66 | 15/16 | 2 | .97 | 50 | 12.0 |
| 2740612C | | 3/4-14 | 1.97 | 1-3/16 | 2 | .97 | 25 | 20.0 |
| 2740804C | | 1/4-18 | 1.76 | 11/16 | 2 | 1.07 | 50 | 7.8 |
| 2740806C | 1/2 | 3/8-18 | 1.76 | 3/4 | 2 | 1.07 | 50 | 7.4 |
| 2740808C | | 1/2-14 | 1.76 | 15/16 | 2 | 1.07 | 25 | 10.0 |
| 2740812C | | 3/4-14 | 2.07 | 1-3/16 | 2 | 1.07 | 25 | 20.2 |
| 2741006C | | 3/8-18 | 2.24 | 3/4 | 3 | 1.55 | 25 | 10.0 |
| 2741008C | 5/8 | 1/2-14 | 2.24 | 15/16 | 3 | 1.55 | 25 | 11.0 |
| 2741012C | NEW | 3/4-14 | 2.55 | 1-3/16 | 3 | 1.55 | 25 | 23.0 |
| 2741208C | 3/4 | 1/2-14 | 2.24 | 15/16 | 3 | 1.55 | 25 | 13.7 |
| 2741212C | | 3/4-14 | 2.55 | 1-3/16 | 3 | 1.55 | 20 | 23.5 |
| 2741612C | 1 | 3/4-14 | 2.55 | 1-3/16 | 3 | 1.55 | 10 | 25.5 |
| 2741616C | | 1 - 11-1/2 | 2.68 | 1-7/16 | 3 | 1.55 | 10 | 37.5 |


- Add a 'BC' suffix to the part number for the brass cap option. Not available for 5/16" I.D. hose size.

Features:

- easy assembly, no need for ferrules or clamps
- these fittings must be used with Lok-On (push-on style) hose ONLY.




572 Series

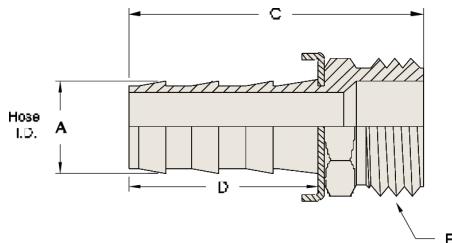**Lok-On Male Garden Hose Fittings**


| Part Number | Hose ID A | NH Thread B | Length C | Hex | No. of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------------|----------------|-------------|--------|-----------------|------------------|--------------|----------------------|
| 5720812C | 1/2 | 3/4-11-1/2 | 1.83 | 1-1/16 | 2 | 1.02 | 25 | 12.3 |
| 5721012C | 5/8 | 3/4-11-1/2 | 2.29 | 1-1/16 | 3 | 1.50 | 25 | 14.5 |
| 5721212C | 3/4 | 3/4-11-1/2 | 2.29 | 1-1/16 | 3 | 1.50 | 25 | 15.1 |

574 Series

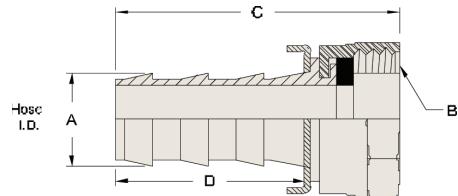**Lok-On Female Swivel Garden Hose Fittings**

| Part Number | Hose ID A | NH Thread B | Length C | Hex | No. of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------------|----------------|-------------|--------|-----------------|------------------|--------------|----------------------|
| 5740812C | 1/2 | 3/4-11-1/2 | 1.79 | 1-3/16 | 2 | 1.02 | 25 | 11.5 |
| 5741012C | 5/8 | 3/4-11-1/2 | 2.25 | 1-3/16 | 3 | 1.50 | 25 | 12.2 |
| 5741212C | 3/4 | 3/4-11-1/2 | 2.25 | 1-3/16 | 3 | 1.50 | 25 | 13.5 |

575 Series

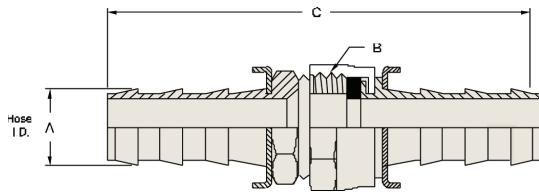**Lok-On Garden Hose Fitting Set - not assembled**

| Part Number | Hose ID A | NH Thread B | Length C | No. of Barbs | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------------|----------------|-------------|-----------------|--------------|----------------------|
| 5750808K | 1/2 | 3/4-11-1/2 | 3.28 | 2 | 25 | 23.8 |
| 5751010K | 5/8 | 3/4-11-1/2 | 4.23 | 3 | 25 | 26.7 |
| 5751212K | 3/4 | 3/4-11-1/2 | 4.23 | 3 | 25 | 28.6 |

Lok-on Hose Fittings

278 Series

NPSM - FEMALE SWIVEL HOSE BARB

National Pipe Straight - Ball Seat Type

| Part Number | Hose ID A | NPSM Thread B | Length C | Hex | No. of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|-----------|---------------|----------|--------|--------------|---------------|-----------|-------------------|
| 2780402C | | 1/8-27 | 1.39 | 1/2 | 2 | .77 | 100 | 3.1 |
| 2780404C | 1/4 | 1/4-18 | 1.47 | 11/16 | 2 | .77 | 50 | 5.9 |
| 2780406C | | 3/8-18 | 1.40 | 11/16 | 2 | .77 | 50 | 8.5 |
| 2780604C | | 1/4-18 | 1.61 | 11/16 | 2 | .92 | 50 | 7.3 |
| 2780606C | 3/8 | 3/8-18 | 1.75 | 13/16 | 2 | .92 | 50 | 9.1 |
| 2780608C | | 1/2-14 | 1.79 | 15/16 | 2 | .97 | 25 | 10.5 |
| 2780808C | 1/2 | 1/2-14 | 1.88 | 15/16 | 2 | 1.02 | 50 | 11.7 |
| 2780812C | | 3/4-14 | 2.36 | 1-3/16 | 2 | 1.02 | 25 | 18.0 |
| 2781012C | 5/8 | 3/4-14 | 2.36 | 1-3/16 | 3 | 1.50 | 25 | 19.4 |
| 2781212C | 3/4 | 3/4-14 | 2.36 | 1-3/16 | 3 | 1.50 | 20 | 21.3 |

- Add a 'BC' suffix to the part number for the brass cap option.

280 Series

NPSM - FEMALE SWIVEL HOSE BARB

National Pipe Straight - Gasket Seat Type


| Part Number | Hose ID A | NPSM Thread B | Length C | Hex | No. of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|-----------|---------------|----------|--------|--------------|---------------|-----------|-------------------|
| 2800402C | 1/4 | 1/8-27 | 1.39 | 1/2 | 2 | .77 | 100 | 2.9 |
| 2800404C | | 1/4-18 | 1.47 | 11/16 | 2 | .77 | 100 | 5.4 |
| 2800604C | | 1/4-18 | 1.61 | 11/16 | 2 | .92 | 50 | 7.0 |
| 2800606C | 3/8 | 3/8-18 | 1.75 | 13/16 | 2 | .92 | 50 | 8.6 |
| 2800608C | | 1/2-14 | 1.80 | 15/16 | 2 | .92 | 50 | 9.4 |
| 2800808C | 1/2 | 1/2-14 | 1.88 | 15/16 | 2 | 1.02 | 25 | 10.8 |
| 2801008C | 5/8 | 1/2-14 | 2.36 | 15/16 | 3 | 1.50 | 25 | 17.8 |
| 2801212C | 3/4 | 3/4-14 | 2.36 | 1-3/16 | 3 | 1.50 | 20 | 18.3 |

- Add a 'BC' suffix to the part number for the brass cap option.

• **Not recommended for use with water**


282 Series

MALE HOSE BARB 45° SAE

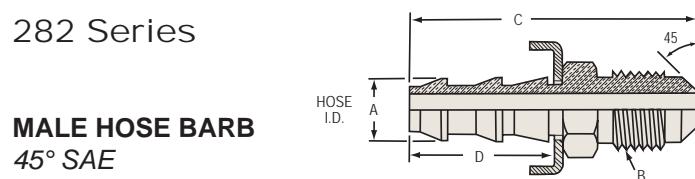


* Notch in hex for SAE identification

- Add a 'BC' suffix to the part number for the brass cap option.

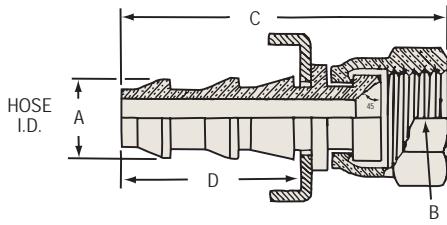**FEMALE SWIVEL
HOSE BARB
45° SAE**


* Notch in nut for SAE identification

• Add a 'BC' suffix to the part number for the brass cap option. Not available for 5/16" I.D. hose size.

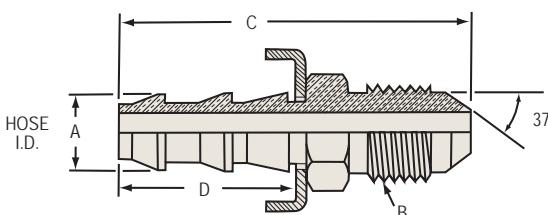
**MALE HOSE BARB
37° J/C**


* UN Thread

• Add a 'BC' suffix to the part number for the brass cap option.

**FEMALE SWIVEL
HOSE BARB**

45° SAE / 37° J/C (dual angle seat)



• Add a 'BC' suffix to the part number for the brass cap option.


* 287-SS are packaged to order

Lok-on Hose Fittings

288 Series

FEMALE SWIVEL HOSE BARB

37°

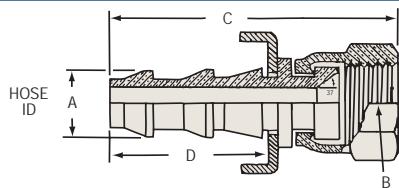

| Part Number | 303 SS | Hose ID A | Tube OD | UNF Thread B | Length C | Hex | No. of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|--------|-----------|---------|----------------|----------|--------|--------------|---------------|-----------|-------------------|
| 2880409C | | 1/4 | 3/8 | 9/16-18 | 1.60 | 11/16 | 2 | .77 | 50 | 5.3 |
| 2880509C | | 5/16 | 3/8 | 9/16-18 | 1.60 | 11/16 | 2 | .82 | 50 | 5.8 |
| 2880609C | SS | 3/8 | 3/8 | 9/16-18 | 1.75 | 11/16 | 2 | .92 | 50 * | 6.5 |
| 2880809C | | 1/2 | 3/8 | 9/16-18 | 1.85 | 11/16 | 2 | 1.02 | 25 | 9.4 |
| 2881217C | SS | 3/4 | 3/4 | 1 - 1/16-12 ** | 2.53 | 1-1/4 | 3 | 1.50 | 10 * | 25.9 |
| 2881621C | SS | 1 | 1 | 1 - 5/16-12 ** | 2.67 | 1-7/16 | 3 | 1.50 | 10 * | 32.5 |

* Add a 'BC' suffix to the part number for the brass cap option. Not available for 5/16" I.D. hose size.


* 288-SS are packaged to order

** UN Thread

289 Series

FEMALE SWIVEL 90° ELBOW

37° JIC / 45° SAE - PLATED STEEL

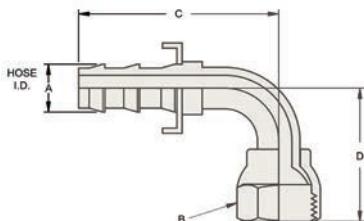

| Part Number | Hose ID A | Tube OD | UNF Thread B | Length Centerline C | Length Centerline D | No. of Barbs | Std. Pkg. | Lbs. per 100 pcs. |
|----------------------|-----------|---------|----------------|---------------------|---------------------|--------------|-----------|-------------------|
| 2890407C + | | 1/4 | 7/16-20 | 1.55 | .83 | 2 | 25 | 5.6 |
| 2890407CSAE * | | 1/4 | 7/16-20 | 1.60 | .83 | 2 | 25 | 6.4 |
| 2890609C + | | 3/8 | 9/16-18 | 1.85 | .91 | 2 | 25 | 10.0 |
| 2890610CSAE * | | 3/8 | 5/8-18 | 1.98 | .85 | 2 | 25 | 11.2 |
| 2890812C + | | 1/2 | 3/4-16 | 2.33 | 1.09 | 2 | 10 | 18.1 |
| 2891217C + | | 3/4 | 1 - 1/16-12 ** | 3.26 | 1.81 | 3 | 5 | 40.0 |


* Notch in nut for SAE identification

** UN Thread

+ JIC only, may substitute dual angle

290 Series


SAE INVERTED FLARE MALE SWIVEL HOSE BARB

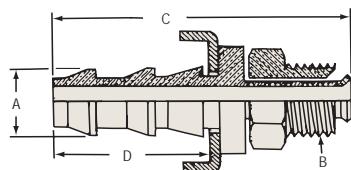

| Part Number | Hose ID A | Tube OD | UNF Thread B | Length C | Hex | Number of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|-----------|---------|--------------|----------|------|-----------------|---------------|-----------|-------------------|
| 2900406C | | 3/16 | 3/8-24 | 1.52 | 7/16 | 2 | .77 | 100 | 3.2 |
| 2900407C | 1/4 | 1/4 | 7/16-24 * | 1.52 | 7/16 | 2 | .77 | 100 | 3.1 |
| 2900408C | | 5/16 | 1/2-20 | 1.58 | 1/2 | 2 | .77 | 100 | 3.8 |
| 2900508C | | 5/16 | 1/2-20 | 1.58 | 1/2 | 2 | .77 | 50 | 4.1 |
| 2900510C | | 3/8 | 5/8-18 | 1.63 | 5/8 | 2 | .77 | 50 | 6.1 |
| 2900608C | | 5/16 | 1/2-20 | 1.73 | 1/2 | 2 | .92 | 100 | 5.8 |
| 2900610C | | 3/8 | 5/8-18 | 1.78 | 5/8 | 2 | .92 | 50 | 7.0 |
| 2900812C | | 1/2 | 3/4-18 * | 1.96 | 3/4 | 2 | 1.02 | 50 | 10.5 |
| 2901014C | | 5/8 | 7/8-18 * | 2.50 | 7/8 | 3 | 1.50 | 25 | 14.9 |

* UNS Thread


* Add a 'BC' suffix to the part number for the brass cap option. Not available for 5/16" ID hose size.

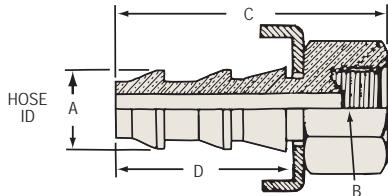
**SAE INVERTED FLARE
RIGID FEMALE HOSE BARB**

| Part Number | Hose ID A | Tube OD | UNF Thread B | Length C | Hex | Number of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------------|------------|--------------------|-------------|------|-----------------------|---------------------|--------------|----------------------|
| 2920406C | | 3/16 | 3/8-24 | 1.17 | 7/16 | 2 | .77 | 100 | 2.3 |
| 2920407C | 1/4 | 1/4 | 7/16-24 * | 1.16 | 1/2 | 2 | .77 | 100 | 2.1 |
| 2920408C | | 5/16 | 1/2-20 | 1.19 | 9/16 | 2 | .77 | 100 | 2.7 |
| 2920508C | 5/16 | 5/16 | 1/2-20 | 1.19 | 9/16 | 2 | .77 | 100 | 3.9 |
| 2920608C | 3/8 | 5/16 | 1/2-20 | 1.34 | 9/16 | 2 | .92 | 100 | 4.4 |
| 2920610C | 3/8 | 5/8-18 | | 1.39 | 3/4 | 2 | .92 | 50 | 5.4 |
| 2920812C | 1/2 | 1/2 | 3/4-18 * | 1.54 | 7/8 | 2 | 1.02 | 25 | 7.8 |

* UNS Thread


- Add a 'BC' suffix to the part number for the brass cap option.

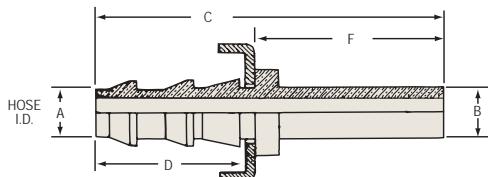
**RIGID TUBE SHANK
HOSE BARB**

| Part Number | 303 SS | Hose ID A | Tube OD B | Length C | Tube Length F | No. of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|-----------|--------------|--------------|-------------|------------------|-----------------|------------------|--------------|----------------------|
| 2940403C | | | 3/16 | 1.68 | .86 | 2 | .77 | 100 | 1.9 |
| 2940404C | SS | 1/4 | 1/4 | 1.88 | 1.06 | 2 | .77 | 100 * | 1.8 |
| 2940405C | | | 5/16 | 1.88 | 1.06 | 2 | .77 | 100 | 2.6 |
| 2940606C | SS | 3/8 | 3/8 | 2.03 | 1.06 | 2 | .92 | 50 * | 3.5 |
| 2940808C | SS | 1/2 | 1/2 | 2.13 | 1.06 | 2 | 1.02 | 50 * | 5.9 |
| 2941010C | | 5/8 | 5/8 | 2.61 | 1.06 | 3 | 1.50 | 25 | 9.7 |
| 2941212C | SS | 3/4 | 3/4 | 2.61 | 1.06 | 3 | 1.50 | 25 * | 25.3 |

* 294-SS packaged to order

- Add a 'BC' suffix to the part number for the brass cap option.

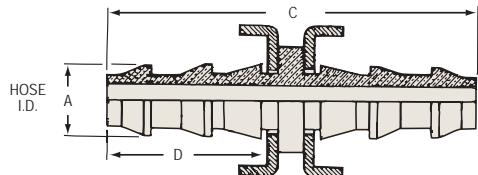
HOSE SPLICER

| Part Number | 303 SS | Hose ID A | Length C | No. of Barbs | Barb Length D | Barb Std. Pkg. | Lbs. per 100 pcs. |
|-------------|-----------|--------------|-------------|-----------------|------------------|-------------------|----------------------|
| 2960404C | SS | 1/4 | 1.73 | 2 | .77 | 100 * | 2.5 |
| 2960505C | | 5/16 | 1.73 | 2 | .77 | 100 | 3.4 |
| 2960606C | SS | 3/8 | 2.05 | 2 | .92 | 50 * | 7.5 |
| 2960808C | SS | 1/2 | 2.25 | 2 | 1.02 | 50 * | 7.5 |
| 2961010C | | 5/8 | 3.21 | 3 | 1.50 | 20 | 12.4 |
| 2961212C | | 3/4 | 3.21 | 3 | 1.50 | 15 | 15.4 |
| 2961616C | | 1 | 3.21 | 3 | 1.50 | 10 | 28.7 |

- Add a 'BC' suffix to the part number for the brass cap option. Not available for 5/16" I.D. hose size.


* 296-SS are packaged to order

Brass Pipe Fittings

163 Series

HEX HEAD PLUG

NPT- Part is hollow




| Part Number | NPT Thread B | Overall Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|-----------------|---------------------|--------|--------------|----------------------|
| 1630200C | 1/8-27 | .56 | 7/16 | 50 | 1.7 |
| 1630400C | 1/4-18 | .63 | 9/16 | 100 | 3.4 |
| 1630600C | 3/8-18 | .78 | 11/16 | 25 | 5.1 |
| 1630800C | 1/2-14 | .97 | 7/8 | 25 | 8.0 |
| 1631200C | 3/4-14 | 1.06 | 1-1/16 | 25 | 14.1 |
| 1631600C | 1 - 11-1/2 | 1.35 | 1-3/8 | 10 | 28.0 |

165 Series

CLOSE PIPE NIPPLE

NPT




| Part Number | NPT Thread B | Length C | Flow Diameter | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|-----------------|-------------|---------------|--------------|----------------------|
| 1650202C | 1/8-27 | .75 | .250 | 50 | 1.0 |
| 1650404C | 1/4-18 | .88 | .375 | 50 | 2.0 |
| 1650606C | 3/8-18 | 1.00 | .500 | 100 | 3.4 |
| 1650808C | 1/2-14 | 1.12 | .625 | 25 | 5.5 |
| 1651212C | 3/4-14 | 1.31 | .750 | 25 | 11.3 |
| 1651616C | 1 - 11-1/2 | 1.75 | .935 | 25 | 15.6 |

166 Series


LONG PIPE NIPPLE

NPT





| Part Number | NPT Thread B | Length C | Flow Diameter | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|-----------------|-------------|---------------|--------------|----------------------|
| 1660215C | | 1.50 | .256 | 25 | 2.6 |
| 1660220C | | 2.00 | .250 | 25 | 3.8 |
| 1660225C | | 2.50 | .250 | 25 | 4.9 |
| 1660230C | 1/8-27 | 3.00 | .256 | 25 | 6.8 |
| 1660235C | | 3.50 | .256 | 10 | 6.9 |
| 1660240C | | 4.00 | .256 | 10 | 7.7 |
| 1660415C | | 1.50 | .375 | 25 | 4.4 |
| 1660420C | | 2.00 | .375 | 25 | 5.9 |
| 1660425C | | 2.50 | .375 | 25 | 8.4 |
| 1660430C | 1/4-18 | 3.00 | .375 | 25 | 10.1 |
| 1660435C | | 3.50 | .375 | 10 | 11.9 |
| 1660440C | | 4.00 | .375 | 10 | 13.7 |
| 1660450C | | 5.00 | .375 | 5 | 17.6 |
| 1660615C | | 1.50 | .500 | 25 | 6.4 |
| 1660620C | | 2.00 | .500 | 25 | 8.7 |
| 1660625C | | 2.50 | .500 | 10 | 11.7 |
| 1660630C | 3/8-18 | 3.00 | .500 | 10 | 14.0 |
| 1660635C | | 3.50 | .500 | 10 | 16.6 |
| 1660640C | | 4.00 | .500 | 5 | 19.2 |

- The last two digits of the part number represent the overall length.


LONG PIPE NIPPLE
NPT (continued)


| Part Number | NPT Thread B | Length C | Flow Diameter | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|-----------------|-------------|---------------|--------------|----------------------|
| 1660815C | 1/2-14 | 1.50 | .625 | 10 | 9.4 |
| 1660820C | | 2.00 | .625 | 10 | 12.7 |
| 1660825C | | 2.50 | .625 | 10 | 16.3 |
| 1660830C | | 3.00 | .625 | 10 | 20.2 |
| 1660835C | | 3.50 | .625 | 10 | 23.8 |
| 1660840C | | 4.00 | .625 | 5 | 27.6 |
| 1661220C | 3/4-14 | 2.00 | .840 | 5 | 17.9 |
| 1661225C | | 2.50 | .840 | 5 | 23.1 |
| 1661230C | | 3.00 | .840 | 5 | 28.0 |
| 1661235C | | 3.50 | .840 | 5 | 32.9 |

- The last two digits of the part number represent the overall length.


90° MALE PIPE ELBOW- Forged
NPTF - Dryseal

MALE UNION
NPSM to NPTF


| Part Number | NPSM Thread B | NPTF Thread B' | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|------------------|-------------------|-------------|--------|--------------|----------------------|
| 1720202C | 1/8 | 1/8-27 | .94 | 7/16 | 100 | 2.5 |
| 1720402C | 1/4 | 1/8-27 | 1.06 | 9/16 | 100 | 3.9 |
| 1720404C | | 1/4-18 | 1.25 | 9/16 | 100 | 5.1 |
| 1720604C | 3/8 | 1/4-18 | 1.28 | 11/16 | 100 | 6.5 |
| 1720606C | | 3/8-18 | 1.30 | 11/16 | 50 | 8.1 |
| 1720608C | | 1/2-14 | 1.47 | 7/8 | 50 | 13.0 |
| 1720806C | | 3/8-18 | 1.35 | 7/8 | 50 | 10.5 |
| 1720808C | 1/2 | 1/2-14 | 1.53 | 7/8 | 50 | 13.1 |
| 1721212C | 3/4 | 3/4-14 | 1.53 | 1-1/16 | 25 | 18.8 |


ADAPTER
NPSM to NPTF

| Part Number | NPSM Thread B | NPTF Thread B' | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|------------------|-------------------|-------------|-------|--------------|----------------------|
| 1740404C | 1/4 | 1/4 | 1.12 | 5/8 | 100 | 5.6 |
| 1740606C | 3/8 | 3/8 | 1.15 | 3/4 | 50 | 6.9 |
| 1740808C | 1/2 | 1/2 | 1.22 | 15/16 | 50 | 10.6 |

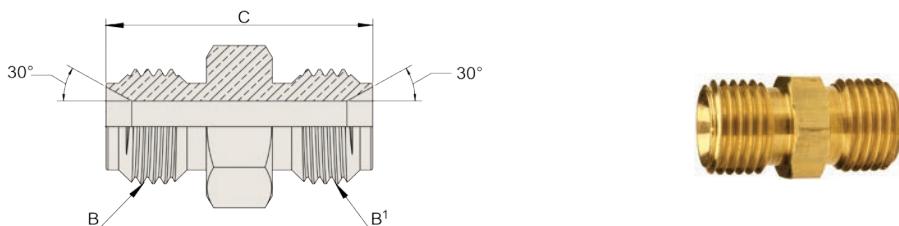
176 Series



MALE UNION
NPSM to NPSM

| Part Number | NPSM Thread B | NPSM Thread B ¹ | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|---------------|----------------------------|----------|-------|-----------|-------------------|
| 1760202C | 1/8 | 1/8 | .79 | 7/16 | 100 | 2.0 |
| 1760404C | 1/4 | 1/4 | 1.09 | 9/16 | 100 | 4.2 |
| 1760606C | 3/8 | 3/8 | 1.19 | 11/16 | 100 | 7.2 |
| 1760808C | 1/2 | 1/2 | 1.31 | 7/8 | 50 | 10.4 |

207BH Series

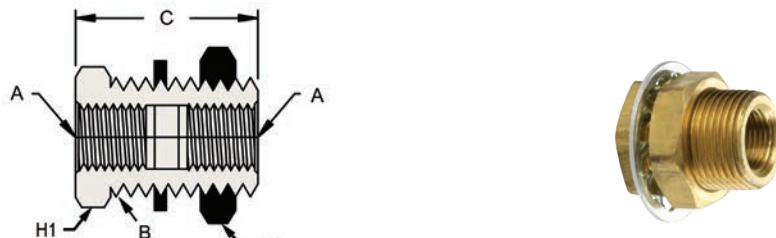**BULKHEAD ANCHOR COUPLING**

Washer Nut is 12L14 Steel


| Part Number | NPTF Pipe Thread A | UNS Straight Thread B | Hex H1 | Hex H2 | Length C | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------------------|-----------------------|--------|--------|----------|-----------|-------------------|
| 207BH2 | 1/8-27 | 5/8-18 | 7/8 | 15/16 | 1.50 | 25 | 16.3 |
| 207BH4 | | 3/4-16 | 1 | 1 | 1.50 | 25 | 19.4 |
| 207BH4S | 1/4-18 | 3/4-16 | 1 | 1 | .94 | 25 | 15.0 |
| 207BH6 | 3/8-18 | 1-14 | 1-1/8 | 1-1/4 | 1.31 | 10 | 27.5 |
| 207BH8 | 1/2-14 | 1-1/8-14 | 1-1/4 | 1-3/8 | 1.50 | 10 | 33.1 |
| 207BH12 | 3/4-14 | 1-5/16-12 | 1-1/2 | 1-1/2 | 1.50 | 10 | 41.3 |

211 Series


**SQUARE HEAD PLUG**

PTF-SAE Short- Lead Free per NSF/ANSI 372


| Part Number | PTF-SAE Thread B | Length C | Square | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|------------------|----------|--------|-----------|-------------------|
| 2110200C | 1/8-27 | .59 | 9/32 | 50 | 2.0 |
| 2110400C | 1/4-18 | .80 | 3/8 | 100 | 3.0 |
| 2110600C | 3/8-18 | .83 | 7/16 | 25 | 6.0 |
| 2110800C | 1/2-14 | 1.07 | 9/16 | 25 | 13.0 |
| 2111200C | 3/4-14 | 1.14 | 5/8 | 25 | 20.0 |

PIPE CAP
NPT


| Part Number | NPT Thread B | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|------------------------------|-----------------|-------------|--------|--------------|----------------------|
| 2130200C | 1/8-27 | .50 | 9/16 | 50 | 3.0 |
| 2130400C ¹ | 1/4-18 | .63 | 5/8 | 100 | 4.0 |
| 2130600C ¹ | 3/8-18 | .63 | 13/16 | 25 | 6.0 |
| 2130800C ¹ | 1/2-14 | .87 | 1 | 25 | 8.0 |
| 2131200C | 3/4-14 | .89 | 1-3/16 | 25 | 16.0 |


¹ Lead Free per NSF/ANSI 372
HEX SOCKET PLUG*NPTF - Lead Free per NSF/ANSI 372*

| Part Number | NPTF Thread B | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|------------------|-------------|------|--------------|----------------------|
| 2190200C | 1/8-27 | .30 | 3/16 | 50 | 1.0 |
| 2190400C | 1/4-18 | .46 | 1/4 | 100 | 2.0 |
| 2190600C | 3/8-18 | .46 | 5/16 | 25 | 3.0 |
| 2190800C | 1/2-14 | .61 | 3/8 | 25 | 5.0 |
| 2191200C | 3/4-14 | .62 | 9/16 | 25 | 10.0 |

**FEMALE PIPE CROSS- Extruded***NPTF - Dryseal*

| Part Number | NPTF Thread B | C | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|------------------|------|--------------|----------------------|
| 2280202C | 1/8-27 | .57 | 25 | 9.6 |
| 2280404C | 1/4-18 | .78 | 25 | 19.5 |
| 2280606C | 3/8-18 | .84 | 25 | 26.7 |
| 2280808C | 1/2-14 | 1.07 | 10 | 54.2 |
| 2281212C | 3/4-14 | 1.16 | 10 | 72.1 |

302 Series


**90° FEMALE PIPE ELBOW- Extruded**

NPTF - Dryseal

Ref. SAE 130238

| Part Number | NPTF Thread B | C | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|------------------|------|--------------|----------------------|
| 3020202C | 1/8-27 | .55 | 25 | 6.3 |
| 3020404C | 1/4-18 | .78 | 25 | 14.8 |
| 3020606C | 3/8-18 | .84 | 25 | 20.0 |
| 3020808C | 1/2-14 | 1.09 | 25 | 38.6 |
| 3021212C | 3/4-14 | 1.16 | 10 | 58.1 |

304 Series


**FULL PATTERN****90° STREET ELBOW- Extruded**

NPTF - Dryseal

Ref. SAE 130239

| Part Number | NPTF Thread B | NPTF Thread B¹ | C | D | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|------------------|-------------------|------|------|--------------|----------------------|
| 3040202C | 1/8-27 | 1/8-27 | .66 | .48 | 25 | 4.9 |
| 3040402C | | 1/8-27 | .72 | .45 | 25 | 11.3 |
| 3040404C | | 1/4-18 | .91 | .72 | 25 | 12.0 |
| 3040604C | | 1/4-18 | 1.25 | .78 | 25 | 14.4 |
| 3040606C | | 3/8-18 | .97 | .78 | 25 | 16.4 |
| 3040806C | | 3/8-18 | 1.25 | .97 | 25 | 32.3 |
| 3040808C | | 1/2-14 | 1.24 | 1.09 | 25 | 37.3 |
| 3041208C | | 1/2-14 | 1.39 | 1.10 | 25 | 50.3 |
| 3041212C | | 3/4-14 | 1.38 | 1.12 | 10 | 51.9 |

306 Series


**45° STREET ELBOW- Extruded**

NPTF - Dryseal

Ref. SAE 130339

| Part Number | NPTF Thread B | C | D | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|------------------|------|-----|--------------|----------------------|
| 3060202C | 1/8-27 | .50 | .38 | 25 | 3.7 |
| 3060404C | 1/4-18 | .72 | .56 | 25 | 7.6 |
| 3060606C | 3/8-18 | .72 | .56 | 25 | 11.9 |
| 3060808C | 1/2-14 | 1.00 | .75 | 25 | 25.8 |
| 3061212C | 3/4-14 | 1.06 | .75 | 10 | 34.1 |


FEMALE PIPE TEE- Extruded
NPTF - Dryseal
Ref. SAE 130438



| Part Number | NPTF Thread B | C | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|------------------|------|--------------|----------------------|
| 3220202C | 1/8-27 | .55 | 25 | 7.7 |
| 3220404C | 1/4-18 | .78 | 25 | 19.1 |
| 3220606C | 3/8-18 | .84 | 25 | 23.2 |
| 3220808C | 1/2-14 | 1.09 | 25 | 47.1 |
| 3221212C | 3/4-14 | 1.16 | 10 | 65.3 |

324 Series


MALE BRANCH TEE- Extruded
NPTF - Dryseal
Ref. SAE 130425



| Part Number | NPTF Thread B | C | D | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|------------------|------|------|--------------|----------------------|
| 3240202C | 1/8-27 | .55 | .66 | 25 | 6.4 |
| 3240404C | 1/4-18 | .78 | .91 | 25 | 16.1 |
| 3240606C | 3/8-18 | .84 | .97 | 25 | 22.3 |
| 3240808C | 1/2-14 | 1.09 | 1.25 | 25 | 42.4 |
| 3241212C | 3/4-14 | 1.09 | 1.25 | 10 | 58.0 |

326 Series

STREET TEE- Extruded
NPTF - Dryseal
Ref. SAE 130424




| Part Number | NPTF Thread B | C | D | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|------------------|------|------|--------------|----------------------|
| 3260202C | 1/8-27 | .55 | .73 | 25 | 6.3 |
| 3260404C | 1/4-18 | .78 | .91 | 25 | 15.8 |
| 3260606C | 3/8-18 | .84 | .97 | 25 | 21.6 |
| 3260808C | 1/2-14 | 1.09 | 1.28 | 25 | 44.3 |
| 3261212C | 3/4-14 | 1.09 | 1.38 | 10 | 59.1 |

370 Series

MALE HEX NIPPLE

NPTF - Dryseal
Ref. SAE 130137




| Part Number | NPTF Thread B | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|---------------|----------|--------|-----------|-------------------|
| 3700202C | 1/8-27 | .97 | 7/16 | 100 | 2.5 |
| 3700404C | 1/4-18 | 1.38 | 9/16 | 100 | 5.4 |
| 3700606C | 3/8-18 | 1.41 | 11/16 | 50 | 7.7 |
| 3700808C | 1/2-14 | 1.81 | 7/8 | 25 | 14.4 |
| 3701212C | 3/4-14 | 1.75 | 1-1/16 | 20 | 21.4 |
| 3701616C | 1 - 11-1/2 | 2.24 | 1-3/8 | 10 | 40.0 |

371 Series

FEMALE HEX COUPLING

NPTF - Dryseal
Ref. SAE 130138




| Part Number | NPTF Thread B | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|---------------|----------|--------|-----------|-------------------|
| 3710202C | 1/8-27 | .75 | 9/16 | 25 | 3.3 |
| 3710404C | 1/4-18 | 1.12 | 3/4 | 25 | 8.8 |
| 3710606C | 3/8-18 | 1.12 | 7/8 | 25 | 10.4 |
| 3710808C | 1/2-14 | 1.50 | 1-1/16 | 25 | 19.9 |
| 3711212C | 3/4-14 | 1.57 | 1-3/8 | 10 | 37.2 |

373 Series

REDUCER BUSHING

NPTF - Dryseal
Ref. SAE 130140




| Part Number | NPTF Thread B External | NPTF Thread B ¹ Internal | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|------------------------|-------------------------------------|----------|--------|-----------|-------------------|
| 3730402C | 1/4-18 | 1/8-27 | .75 | 9/16 | 100 | 2.6 |
| 3730602C | | 1/8-27 | .75 | 11/16 | 100 | 5.3 |
| 3730604C | 3/8-18 | 1/4-18 | .75 | 3/4 | 100 | 4.0 |
| 3730802C | | 1/8-27 | 1.00 | 7/8 | 25 | 12.9 |
| 3730804C | 1/2-14 | 1/4-18 | 1.00 | 7/8 | 50 | 10.4 |
| 3730806C | | 3/8-18 | 1.00 | 7/8 | 50 | 7.3 |
| 3731202C * | | 1/8-27 | .94 | 1-1/16 | 25 | 21.6 |
| 3731204C | 3/4-14 | 1/4-18 | 1.00 | 1-1/8 | 25 | 20.5 |
| 3731206C | | 3/8-18 | 1.00 | 1-1/8 | 25 | 22.1 |
| 3731208C | | 1/2-14 | 1.00 | 1-1/8 | 25 | 12.5 |
| 3731604C * | | 1/4-18 | 1.12 | 1-3/8 | 10 | 48.7 |
| 3731606C * | 1-11-1/2 | 3/8-18 | 1.12 | 1-7/16 | 10 | 43.7 |
| 3731608C | | 1/2-14 | 1.12 | 1-7/16 | 10 | 37.2 |
| 3731612C | | 3/4-14 | 1.12 | 1-7/16 | 10 | 27.0 |

* SAE does not provide a standard for these sizes.

ADAPTER


NPTF - Dryseal
Ref. SAE 130139



| Part Number | NPTF Thread B ¹ Internal | NPTF Thread B External | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--|---------------------------|-------------|--------|--------------|----------------------|
| 3750202C | 1/8-27 | 1/8-27 | .88 | 9/16 | 100 | 3.6 |
| 3750402C | | 1/8-27 | 1.06 | 3/4 | 50 | 7.3 |
| 3750404C | 1/4-18 | 1/4-18 | 1.25 | 3/4 | 50 | 8.8 |
| 3750602C | | 1/8-27 | 1.07 | 7/8 | 50 | 7.4 |
| 3750604C | 3/8-18 | 1/4-18 | 1.25 | 7/8 | 50 | 10.2 |
| 3750606C | | 3/8-18 | 1.25 | 7/8 | 50 | 10.6 |
| 3750804C | | 1/4-18 | 1.47 | 1-1/16 | 25 | 9.8 |
| 3750806C | 1/2-14 | 3/8-18 | 1.47 | 1-1/16 | 25 | 18.3 |
| 3750808C | | 1/2-14 | 1.66 | 1-1/16 | 25 | 20.6 |
| 3751206C | | 3/8-18 | 1.50 | 1-3/8 | 10 | 18.0 |
| 3751208C | 3/4-14 | 1/2-14 | 1.69 | 1-3/8 | 10 | 33.2 |
| 3751212C | | 3/4-14 | 1.69 | 1-3/8 | 10 | 34.3 |

REDUCER COUPLER


NPTF - Dryseal (double female)
Ref. SAE 130138



| Part Number | NPTF Thread B | NPTF Thread B ¹ | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|------------------|-------------------------------|-------------|--------|--------------|----------------------|
| 3770402C | 1/4-18 | 1/8-27 | .97 | 3/4 | 50 | 7.5 |
| 3770602C | | 1/8-27 | 1.00 | 7/8 | 50 | 5.7 |
| 3770604C | 3/8-18 | 1/4-18 | 1.16 | 7/8 | 50 | 11.6 |
| 3770804C | | 1/4-18 | 1.28 | 1-1/16 | 25 | 13.3 |
| 3770806C | 1/2-14 | 3/8-18 | 1.38 | 1-1/16 | 10 | 20.1 |
| 3771206C | | 3/8-18 | 1.38 | 1-3/8 | 10 | 18.4 |
| 3771208C | 3/4-14 | 1/2-14 | 1.50 | 1-3/8 | 10 | 23.1 |

MALE REDUCING HEX NIPPLE

NPTF - Dryseal
Ref. SAE 130137



| Part Number | NPTF Thread B | NPTF Thread B ¹ | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|------------------|-------------------------------|-------------|--------|--------------|----------------------|
| 3790402C | 1/4-18 | 1/8-27 | 1.19 | 9/16 | 100 | 4.5 |
| 3790602C | | 1/8-27 | 1.22 | 11/16 | 50 | 6.3 |
| 3790604C | 3/8-18 | 1/4-18 | 1.41 | 11/16 | 50 | 7.4 |
| 3790804C | | 1/4-18 | 1.62 | 7/8 | 50 | 10.5 |
| 3790806C | 1/2-14 | 3/8-18 | 1.62 | 7/8 | 50 | 12.3 |
| 3791208C | 3/4-14 | 1/2-14 | 1.80 | 1-1/16 | 25 | 18.9 |

Garden Hose Fittings and Accessories

500 Series



ACCESSORIES - BAR STOCK

| Part Number | Description |
|-------------|---------------------|
| 500BFP | back flow preventer |

Features:

- 125 max PSI
- Working Temperature 33°F - 140°F
- EPDM gasket
- Stainless steel components



500AN4



500SN2



500SN6



500GHV



500YC



500GHY



500GH4VBK

NOZZLES

| Part Number | Description |
|-------------|-----------------------------------|
| 500AN4 | 4" adjustable nozzle |
| 500AN7 | 6" adjustable nozzle |
| 500SN2 | 2" sweeper nozzle, machined brass |
| 500SN6 | 6" sweeper nozzle, machined brass |

ACCESSORIES- Forged

| Part Number | Description |
|-------------|--|
| 500GHV | Forged brass ball valve, 3/4 NH male x female; 140°F - 100 PSI |
| 500GHY | Double Y valve, swivel inlet - with Higbie cut threads (capped) to prevent cross threading; 140°F - 100 PSI |
| 500YC | Y coupler, nickel plated brass; 195°F - 150 PSI |
| 500GH4VBK | GH 4 valve manifold, swivel inlet, black knob; 120°F - 100 PSI |

COUPLERS

| Part Number | 303 SS | Description |
|-------------|--------|--|
| 500QCF | SS | Female coupler; 140°F - 150 PSI |
| 500QCSG | | Garden hose coupler seal gasket: NBR material, 140°F - 150 PSI |
| 500QCFV | | Valved coupler, water shutoff; 140°F - 150 PSI |
| 500QCM | SS | Male plug, extended thread; 195°F - 150 PSI |
| 500QCK | SS | Complete assembly; 140°F - 150 PSI |
| 500QCKV | | Complete assembly, valved; 140°F - 150 PSI |

COMPONENTS

| Part Number | Description |
|-------------|---|
| 5911212F | Filter Washer, 1.00" OD, 304 stainless steel mesh, FDA black PVC duro, 70A |
| 5911212W | Washer, .63" ID, 1.00" OD black 80 duro SBR |
| 5911616W | Washer, .86" ID, 1.27" OD black 60 duro SBR |
| 5861012N | 3/4" Garden hose nut round with knurl |
| 5911212N | 3/4" Garden hose nut hex with knurl |
| 5911616N | 1" Garden hose nut (NPSH) hex with knurl |



5861012N



5911212F




5911212N

Note: Hose fittings stem components are also available separately. Contact Dixon Brass for availability and pricing.

Garden Hose Fittings



303 Stainless Steel



CDA Brass 360

501 Series

FEMALE HOSE x FEMALE PIPE


Non-swivel NH x NPTF

| Part Number | 303 SS | NH Thread B | NPTF Thread B ¹ | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------|--------------|----------------------------|----------|--------|-----------|-------------------|
| 5011202C | | | 1/8-27 | 1.02 | 1-3/16 | 50 | 9.9 |
| 5011204C | | | 1/4-18 | 1.12 | 1-3/16 | 25 | 10.4 |
| 5011206C | | 3/4 - 11-1/2 | 3/8-18 | 1.18 | 1-3/16 | 25 | 10.6 |
| 5011208C | SS | | 1/2-14 | 1.32 | 1-3/16 | 25 * | 12.4 |
| 5011212C | SS | | 3/4-14 | 1.56 | 1-3/16 | 25 * | 13.0 |

* 501-SS threads B¹ are NPT and the parts are packaged to order



303 Stainless Steel



502 Series

FEMALE HOSE x FEMALE PIPE


Swivel NH x NPTF

| Part Number | 303 SS | NH Thread B | NPTF Thread B ¹ | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------|--------------|----------------------------|----------|--------|-----------|-------------------|
| 5021208C | SS | | 1/2-14 | 1.33 | 1-3/16 | 25 * | 15.4 |
| 5021212C | SS | 3/4 - 11-1/2 | 3/4-14 | 1.59 | 1-3/16 | 10 * | 22.3 |

* 502-SS threads B¹ are NPT and the parts are packaged to order



303 Stainless Steel



503 Series

FEMALE HOSE x MALE PIPE


Non-swivel NH x NPTF

| Part Number | 303 SS | NH Thread B | NPTF Thread B ¹ | NPTF Thread B ² | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------|--------------|----------------------------|----------------------------|----------|--------|-----------|-------------------|
| 5031206C | | | 3/8-18 | --- | 1.37 | 1-3/16 | 25 | 11.3 |
| 5031208C | SS | 3/4 - 11-1/2 | 1/2-14 | --- | 1.37 | 1-3/16 | 25 * | 13.0 |
| 5031212C | SS | | 3/4-14 | 1/2-14 | 1.37 | 1-3/16 | 25 * | 14.0 |

* 503-SS threads B¹ are NPT and the parts are packaged to order



303 Stainless Steel



504 Series


FEMALE HOSE x MALE PIPE

Swivel - Internal and External Hex NH x NPTF

| Part Number | 303 SS | NH Thread B | NPTF Thread B ¹ | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------|--------------|----------------------------|----------|--------|-----------|-------------------|
| 5041204C | | | 1/4-18 | 1.43 | 1-3/16 | 25 | 12.5 |
| 5041206C | | | 3/8-18 | 1.43 | 1-3/16 | 25 | 15.1 |
| 5041208C | SS | 3/4 - 11-1/2 | 1/2-14 | 1.63 | 1-3/16 | 25 * | 16.3 |
| 5041212C | SS | | 3/4-14 | 1.43 | 1-3/16 | 20 * | 19.4 |

* 504-SS threads B¹ are NPT and the parts are packaged to order


506 Series

**FEMALE HOSE x FEMALE HOSE**

Swivel NH x NH

| Part Number | NH Thread B | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|----------------|-------------|--------|--------------|----------------------|
| 5061212C | 3/4 - 11-1/2 | 1.32 | 1-3/16 | 25 | 14.1 |

507 Series

**MALE HOSE x FEMALE PIPE**

NH x NPTF


303 Stainless Steel

CDA Brass 360

| Part Number | 303 SS | NH Thread B | NPTF Thread B' | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|-----------|----------------|-------------------|-------------|--------|--------------|----------------------|
| 5071204C | | | 1/4-18 | .75 | 1-1/16 | 25 | 13.6 |
| 5071206C | | | 3/8-18 | .75 | 1-1/16 | 25 | 11.1 |
| 5071208C | SS | 3/4 - 11-1/2 | 1/2-14 | .75 | 1-1/16 | 25 * | 7.9 |
| 5071212C | SS | | 3/4-14 | 1.37 | 1-3/16 | 25 * | 20.0 |

* 507-SS threads B' are NPT and the parts are packaged to order

508 Series

**MALE HOSE x MALE PIPE**

NH x NPTF


303 Stainless Steel

CDA Brass 360

| Part Number | 303 SS | NH Thread B | NPTF Thread B' | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|-----------|----------------|-------------------|-------------|--------|--------------|----------------------|
| 5081206C | | | 3/8-18 | 1.31 | 1-1/16 | 25 | 11.9 |
| 5081208C | SS | 3/4 - 11-1/2 | 1/2-14 | 1.50 | 1-1/16 | 25 * | 13.5 |
| 5081212C | SS | | 3/4-14 | 1.50 | 1-1/16 | 25 * | 16.7 |
| 5081216C | | | 1 - 11-1/2 | 1.85 | 1-3/8 | 10 | 22.5 |

* 508-SS threads B' are NPT and the parts are packaged to order

509 Series

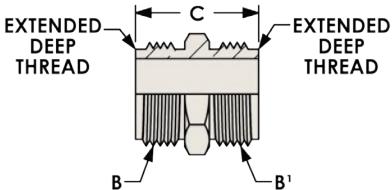**MALE HOSE x MALE HOSE**

NH x NH


303 Stainless Steel

CDA Brass 360

| Part Number | 303 SS | NH Thread B | NH Thread B' | Length C | Hex | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|-----------|----------------|-----------------|-------------|--------|--------------|----------------------|
| 5091212C | SS | 3/4 - 11-1/2 | 3/4 - 11-1/2 | 1.24 | 1-1/16 | 25 * | 13.1 |
| 5091612C | | 1 - 11-1/2 ** | 3/4 - 11-1/2 | 1.43 | 1-3/8 | 20 | 18.9 |

* 509-SS are packaged to order

** NPSH thread

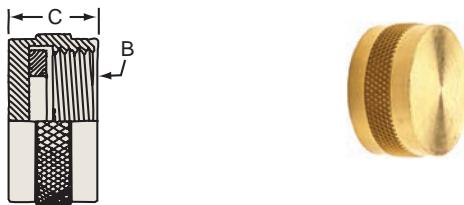


HOSE CAP
Round


| Part Number | NH Thread B | Length C | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|----------------|-------------|--------------|----------------------|
| 5131212C | 3/4 - 11-1/2 | .625 | 25 | 7.8 |



**MALE HOSE x MALE PIPE x
FEMALE PIPE**
NH x NPTF x NPTF




* 514-SS threads are NPT and the parts are packaged to order



GARDEN HOSE MENDER

| Part Number | Hose ID A | Length C | No. of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|--------------|-------------|-----------------|------------------|--------------|----------------------|
| 5780808C | 1/2 | 2.06 | 4 | .97 | 50 | 6.5 |
| 5781010C | 5/8 | 2.06 | 4 | .97 | 50 | 8.6 |
| 5781212C | 3/4 | 2.50 | 4 | 1.19 | 20 | 12.9 |
| 5781616C | 1 | 3.00 | 5 | 1.44 | 10 | 22.5 |


Note: See page 8 for stainless steel menders



**SHORT SHANK
MALE GARDEN HOSE FITTING**


| Part Number | Hose ID A | NH Thread B | Length C | Hex | No. of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|--------------|----------------|-------------|--------|-----------------|------------------|--------------|----------------------|
| 5850812C | 1/2 | 3/4 - 11-1/2 | 1.75 | 1-1/16 | 3 | 1.00 | 25 | 11.0 |
| 5851012C | 5/8 | 3/4 - 11-1/2 | 1.75 | 1-1/16 | 3 | 1.00 | 25 | 11.9 |
| 5851212C | 3/4 | 3/4 - 11-1/2 | 1.75 | 1-1/16 | 3 | 1.00 | 25 | 13.4 |

586 Series


**SHORT SHANK FEMALE SWIVEL
GARDEN HOSE FITTING**
(round nut)

| Part Number | Hose ID A | NH Thread B | Length C | No. of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|-----------|--------------|----------|--------------|---------------|-----------|-------------------|
| 5860812C | 1/2 | 3/4 - 11-1/2 | 1.63 | 3 | 1.00 | 25 | 9.8 |
| 5861012C | 5/8 | 3/4 - 11-1/2 | 1.63 | 3 | 1.00 | 25 | 10.2 |
| 5861212C | 3/4 | 3/4 - 11-1/2 | 1.63 | 3 | 1.00 | 25 | 11.5 |


587 Series


**SHORT SHANK
GARDEN HOSE FITTING SET ***
(round nut)

| Part Number | Hose ID A | NH Thread B | Length C | No. of Barbs | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|-----------|--------------|----------|--------------|-----------|-------------------|
| 5870808K | 1/2 | 3/4 - 11-1/2 | 2.95 | 3 | 25 | 20.8 |
| 5871010K | 5/8 | 3/4 - 11-1/2 | 2.95 | 3 | 25 | 22.1 |
| 5871212K | 3/4 | 3/4 - 11-1/2 | 2.95 | 3 | 25 | 25.0 |


* not assembled

588 Series


**SHORT SHANK
FEMALE SWIVEL
GARDEN HOSE FITTING**
(hex nut)

| Part Number | Hose ID A | NH Thread B | Length C | No. of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|-----------|--------------|----------|--------------|---------------|-----------|-------------------|
| 5880812C | 1/2 | 3/4 - 11-1/2 | 1.63 | 3 | 1.00 | 25 | 10.7 |
| 5881012C | 5/8 | 3/4 - 11-1/2 | 1.63 | 3 | 1.00 | 25 | 10.9 |
| 5881212C | 3/4 | 3/4 - 11-1/2 | 1.63 | 3 | 1.00 | 25 | 12.1 |

589 Series

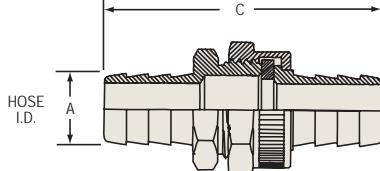

**SHORT SHANK
GARDEN HOSE FITTING SET ***
(hex nut)

| Part Number | Hose ID A (both fittings) | NH Thread B | Length C | No. of Barbs | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|---------------------------|--------------|----------|--------------|-----------|-------------------|
| 5890808K | 1/2 | 3/4 - 11-1/2 | 2.95 | 3 | 25 | 21.7 |
| 5891010K | 5/8 | 3/4 - 11-1/2 | 2.95 | 3 | 25 | 22.9 |
| 5891212K | 3/4 | 3/4 - 11-1/2 | 2.95 | 3 | 25 | 25.6 |

* not assembled



303 Stainless Steel




CDA Brass 360

MALE GARDEN HOSE FITTING

| Part Number | 303 SS | Hose ID A | NH Thread B | Length C | Hex | No. of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------|-----------|---------------|----------|--------|--------------|---------------|-----------|-------------------|
| 5900612C | | 3/8 | 3/4 - 11-1/2 | 1.94 | 1-1/16 | 4 | 1.19 | 25 | 11.3 |
| 5900812C | SS | 1/2 | 3/4 - 11-1/2 | 1.94 | 1-1/16 | 4 | 1.19 | 25 * | 12.3 |
| 5901012C | SS | 5/8 | 3/4 - 11-1/2 | 1.94 | 1-1/16 | 4 | 1.19 | 25 * | 14.5 |
| 5901212C | SS | 3/4 | 3/4 - 11-1/2 | 1.94 | 1-1/16 | 4 | 1.19 | 25 * | 15.1 |
| 5901612C | | 1 | 3/4 - 11-1/2 | 1.94 | 1-1/16 | 4 | 1.19 | 10 | 21.4 |
| 5901616C | | | 1 - 11-1/2 ** | 2.38 | 1-3/8 | 5 | 1.44 | 10 | 25.6 |

* 590-SS are packaged to order

** NPSH thread - extended

303 Stainless Steel
GARDEN HOSE FITTING

CDA Brass 360

FEMALE SWIVEL GARDEN HOSE FITTING


| Part Number | 303 SS | Hose ID A | NH Thread B | Length C | Hex | No. of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------|-----------|---------------|----------|--------|--------------|---------------|-----------|-------------------|
| 5910612C | | 3/8 | 3/4 - 11-1/2 | 1.82 | 1-3/16 | 4 | 1.19 | 25 | 11.2 |
| 5910812C | SS | 1/2 | 3/4 - 11-1/2 | 1.82 | 1-3/16 | 4 | 1.19 | 25 * | 11.5 |
| 5911012C | SS | 5/8 | 3/4 - 11-1/2 | 1.82 | 1-3/16 | 4 | 1.19 | 25 * | 12.2 |
| 5911212C | SS | 3/4 | 3/4 - 11-1/2 | 1.82 | 1-3/16 | 4 | 1.19 | 25 * | 13.5 |
| 5911612C | | 1 | 3/4 - 11-1/2 | 2.10 | 1-3/16 | 4 | 1.19 | 10 | 25.2 |
| 5911616C | | | 1 - 11-1/2 ** | 2.25 | 1-7/16 | 5 | 1.44 | 10 | 24.4 |

* 591-SS are packaged to order

** NPSH thread



303 Stainless Steel

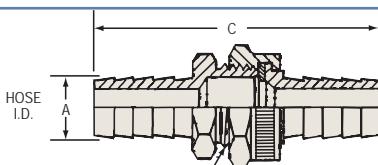

CDA Brass 360


GARDEN HOSE FITTING SET - not assembled

| Part Number | 303 SS | Hose ID (both fittings) A | NH Thread B | Length C | No. of Barbs | Std. Pkg. | Lbs. per 100 pcs. |
|-------------|--------|---------------------------|---------------|----------|--------------|-----------|-------------------|
| 5920606K | | 3/8 | 3/4 - 11-1/2 | 3.32 | 4 | 25 | 22.5 |
| 5920808K | SS | 1/2 | 3/4 - 11-1/2 | 3.32 | 4 | 25 * | 23.8 |
| 5921010K | SS | 5/8 | 3/4 - 11-1/2 | 3.32 | 4 | 25 * | 26.7 |
| 5921212K | SS | 3/4 | 3/4 - 11-1/2 | 3.32 | 4 | 25 * | 28.6 |
| 5921612K | | 1 | 3/4 - 11-1/2 | 3.60 | 4 | 10 | 46.7 |
| 5921616K | | | 1 - 11-1/2 ** | 4.19 | 5 | 10 | 50.0 |

* 592-SS are packaged to order

** NPSH thread


593 Series

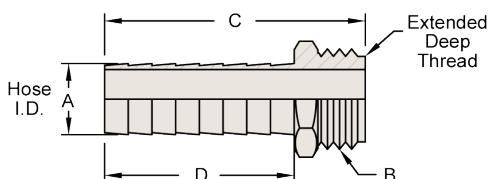**LONG SHANK MALE
GARDEN HOSE FITTING**

| Part Number | Hose ID A | NH Thread B | Length C | Hex | No. of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|--------------|----------------|-------------|--------|-----------------|------------------|--------------|----------------------|
| 5930812C | 1/2 | 3/4 - 11-1/2 | 2.78 | 1-1/16 | 7 | 2.03 | 25 | 13.8 |
| 5931012C | 5/8 | 3/4 - 11-1/2 | 2.78 | 1-1/16 | 7 | 2.03 | 25 | 15.1 |
| 5931212C | 3/4 | 3/4 - 11-1/2 | 2.78 | 1-1/16 | 7 | 2.03 | 10 | 17.9 |
| 5931616C | 1 | 1 - 11-1/2 * | 2.96 | 1- 3/8 | 7 | 2.03 | 5 | 28.9 |

* NPSH thread


594 Series

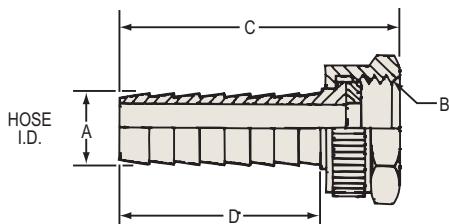**LONG SHANK FEMALE SWIVEL
GARDEN HOSE FITTING**

| Part Number | Hose ID A | NH Thread B | Length C | Hex | No. of Barbs | Barb Length D | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|--------------|----------------|-------------|--------|-----------------|------------------|--------------|----------------------|
| 5940812C | 1/2 | 3/4 - 11-1/2 | 2.66 | 1-3/16 | 7 | 2.03 | 25 | 13.0 |
| 5941012C | 5/8 | 3/4 - 11-1/2 | 2.66 | 1-3/16 | 7 | 2.03 | 25 | 14.2 |
| 5941212C | 3/4 | 3/4 - 11-1/2 | 2.66 | 1-3/16 | 7 | 2.03 | 10 | 16.7 |
| 5941616C | 1 | 1 - 11-1/2 * | 2.84 | 1-7/16 | 7 | 2.03 | 5 | 28.8 |

* NPSH thread

595 Series

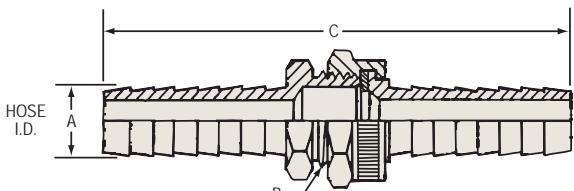**LONG SHANK
GARDEN HOSE FITTING SET ****

| Part Number | Hose ID A (both fittings) | NH Thread B | Length C | No. of Barbs | Std. Pkg. | Lbs. per 100 pcs. |
|-----------------|------------------------------|----------------|-------------|-----------------|--------------|----------------------|
| 5950808K | 1/2 | 3/4 - 11-1/2 | 5.05 | 7 | 25 | 26.9 |
| 5951010K | 5/8 | 3/4 - 11-1/2 | 5.05 | 7 | 25 | 29.3 |
| 5951212K | 3/4 | 3/4 - 11-1/2 | 5.05 | 7 | 10 | 34.6 |
| 5951616K | 1 | 1 - 11-1/2 * | 5.20 | 7 | 5 | 57.6 |

* NPSH thread

** Not assembled

Features:

- Even spray valve mist provides the proper moisture on paper roll ends
- Helps eliminate wrinkles and folder delivery problems, increasing pressroom production and reducing waste
- A slight flex of the hose in any direction (360°) activates the spray.
- Quick action with no protruding levers, thumb depressors, triggers or other devices utilized
- Positive water seal when hose is released causes the internal valve to close and immediately shut off spray.
- Sealed mechanism with no packing gland

833 Series

valve with hook

| Female NPT Size | Description | Part # |
|-----------------|------------------|---------------|
| 1/4" | valve, no hook | 83304 |
| 3/8" | valve, no hook | 83306 |
| 1/4" | valve, with hook | 83304H |
| 3/8" | valve, with hook | 83306H |

832 Series**Spray Valve Hose Assembly**

| Part Number | Male NPT Inlet | Description |
|-----------------|----------------|-----------------------------|
| 8320605 | 3/8" | 3/8" ID, 5' Hose |
| 8320606 | 3/8" | 3/8" ID, 6' Hose |
| 8320608 | 3/8" | 3/8" ID, 8' Hose |
| 8320610 | 3/8" | 3/8" ID, 10' Hose |
| 8320612 | 3/8" | 3/8" ID, 12' Hose |
| 8320615 | 3/8" | 3/8" ID, 15' Hose |
| 8320605H | 3/8" | 3/8" ID, 5' Hose with hook |
| 8320606H | 3/8" | 3/8" ID, 6' Hose with hook |
| 8320608H | 3/8" | 3/8" ID, 8' Hose with hook |
| 8320610H | 3/8" | 3/8" ID, 10' Hose with hook |
| 8320612H | 3/8" | 3/8" ID, 12' Hose with hook |
| 8320615H | 3/8" | 3/8" ID, 15' Hose with hook |

Grease Whip Hose Assemblies and Couplings

GWH Series



Features:

- One piece brass crimp couplings
- 1/8-27 male NPT thread, solid base
- US manufactured to 3/16" ID hose - meets SAE100R1-AT; working pressure of **3000 PSI**
- For use with hand grease guns only
- Available with optional retail packaging or strain relief spring

HOSE ASSEMBLIES

| Part Number | Assembly Length | Strain Relief Spring | Retail Pack | Std. Pkg. |
|----------------|-----------------|-------------------------------|-------------------------------|--------------------------|
| GWH0800 | 8" | Add 'S' suffix to part number | | |
| GWH1200 | 12" | Add 'S' suffix to part number | Add 'R' suffix to part number | |
| GWH1800 | 18" | Add 'S' suffix to part number | Add 'R' suffix to part number | |
| GWH2400 | 24" | Add 'S' suffix to part number | | Per customer requirement |
| GWH3600 | 36" | Add 'S' suffix to part number | | |
| GWH4800 | 48" | Add 'S' suffix to part number | | |
| GWH6000 | 60" | Add 'S' suffix to part number | | |

For lengths not listed, call for quote (50 minimum)




COUPLER and FITTINGS

| Part Number | Description | Material | Retail Pack | Std. Pkg. |
|-----------------|--|-------------------|-------------------------------|-----------|
| GWHC | Grease hose coupler with ball check - valved shutoff | Zinc Plated Steel | Add 'R' suffix to part number | 10 |
| GWHC-FF | Grease hose coupler - Full Flow | Zinc Plated Steel | Add 'R' suffix to part number | 10 |
| 0010055C | 1/8-27 male NPT thread, drilled and chamfered base | Brass | | 100 |
| 0010260C | 1/8-27 male NPT thread, solid base | Brass | | 100 |
| 0010860C | 1/8-27 female NPT thread | Brass | | 100 |



GWHZ000
GWHZ400



GWHZ045
GWHZ445



GWHZ090
GWHZ490



GWHZ090
GWHZ490

GHWZ- ZERK FITTINGS

Zinc Plated Steel


| Part Number | Description | Thread | A Overall Length | B Thread Length | Hex | Std. Pkg | Lbs. per 100 pcs. |
|----------------|----------------------|-----------------------|---------------------|--------------------|------|----------|----------------------|
| GWHZ000 | Ball check | 1/8-27 NPT | .66 | .26 | .43 | 100 | 1.00 |
| GWHZ045 | 45° Angle ball check | 1/8-27 NPT | .86 | .28 | .43 | 100 | 1.00 |
| GWHZ090 | 90° Angle ball check | 1/8-27 NPT | .83 | .31 | .43 | 100 | 1.00 |
| GWHZ400 | Ball check | 1/4-28 Tapered SAE-LT | .53 | .20 | .312 | 100 | 1.00 |
| GWHZ445 | 45° Angle ball check | 1/4-28 Tapered SAE-LT | .80 | .20 | .375 | 100 | 1.00 |
| GWHZ490 | 90° Angle ball check | 1/4-28 Tapered SAE-LT | 1.20 | .20 | .375 | 100 | 1.00 |

All items available in retail packs of 10 - Add R to part number: Order 1 for 1 Retail Pack of 10 pcs.


Compression Fittings

60 Series

SLEEVE 60C
Reference SAE 060115




| Part Number | Tube Size | A | D | L | Std. Pkg. |
|---------------|-----------|-------|------|-----|-----------|
| 60C-02 | 1/8 | .187 | .130 | .19 | 100 |
| 60C-03 | 3/16 | .266 | .192 | .22 | 100 |
| 60C-04 | 1/4 | .344 | .255 | .25 | 100 |
| 60C-05 | 5/16 | .406 | .318 | .25 | 100 |
| 60C-06 | 3/8 | .469 | .382 | .25 | 100 |
| 60C-07 | 7/16 | .531 | .444 | .31 | 100 |
| 60C-08 | 1/2 | .594 | .507 | .38 | 100 |
| 60C-10 | 5/8 | .719 | .632 | .38 | 100 |
| 60C-12 | 3/4 | .875 | .758 | .44 | 50 |
| 60C-14 | 7/8 | 1.000 | .883 | .41 | 50 |




ACETAL SLEEVE 60PT

| Part Number | Plastic Tube Wall | Tube Wall | A | D | L | Std. Pkg. |
|----------------|-------------------|-----------|------|------|-----|-----------|
| 60PT-04 | 1/4 | .40 | .375 | .254 | .19 | 200 |
| 60PT-05 | 5/16 | .62 | .438 | .317 | .19 | 100 |
| 60PT-06 | 3/8 | .62 | .500 | .379 | .19 | 100 |
| 60PT-08 | 1/2 | .62 | .631 | .507 | .25 | 100 |
| 60PT-10 | 5/8 | .62 | .747 | .632 | .22 | 100 |



NUT 61C
Reference SAE 060110

| Part Number | Tube Size | Straight Thread | Hex C | D | L | Std. Pkg. |
|---------------|-----------|-----------------|--------|------|-----|-----------|
| 61C-02 | 1/8 | 5/16-24 | 3/8 | .130 | .38 | 100 |
| 61C-03 | 3/16 | 3/8-24 | 7/16 | .192 | .41 | 100 |
| 61C-04 | 1/4 | 7/16-24 | 1/2 | .255 | .44 | 100 |
| 61C-05 | 5/16 | 1/2-24 | 9/16 | .318 | .44 | 50 |
| 61C-06 | 3/8 | 9/16-24 | 5/8 | .382 | .47 | 100 |
| 61C-07 | 7/16 | 5/8-24 | 11/16 | .444 | .50 | 25 |
| 61C-08 | 1/2 | 11/16-20 | 13/16 | .507 | .62 | 50 |
| 61C-10 | 5/8 | 13/16-18 | 15/16 | .632 | .62 | 25 |
| 61C-12 | 3/4 | 1-18 | 1-3/16 | .758 | .69 | 25 |
| 61C-14 | 7/8 | 1-1/8-18 | 1-1/4 | .890 | .62 | 25 |




LONG NUT 61CL
Reference SAE 060111

| Part Number | Tube Size | Straight Thread | Hex C | D | L | Std. Pkg. |
|----------------|-----------|-----------------|--------|------|------|-----------|
| 61CL-04 | 1/4 | 7/16-24 | 1/2 | .255 | .75 | 10 |
| 61CL-05 | 5/16 | 1/2-24 | 9/16 | .318 | .84 | 10 |
| 61CL-06 | 3/8 | 9/16-24 | 5/8 | .382 | .97 | 10 |
| 61CL-08 | 1/2 | 11/16-20 | 13/16 | .507 | 1.06 | 10 |
| 61CL-10 | 5/8 | 13/16-18 | 15/16 | .632 | 1.19 | 10 |
| 61CL-12 | 3/4 | 1-18 | 1-3/16 | .758 | 1.38 | 10 |

Compression Fittings


62C Series



UNION 62C

Reference SAE 060101 BA


| Part Number | Tube Size | Straight Thread | Hex C | L | M | Flow Diameter | Std. Pkg. |
|---------------|-----------|-----------------|-------|------|------|---------------|-----------|
| 62C-02 | 1/8 | 5/16-24 | 5/16 | 1.05 | .64 | .094 | 25 |
| 62C-03 | 3/16 | 3/8-24 | 3/8 | 1.21 | .72 | .125 | 25 |
| 62C-04 | 1/4 | 7/16-24 | 7/16 | 1.33 | .79 | .188 | 50 |
| 62C-05 | 5/16 | 1/2-24 | 1/2 | 1.39 | .85 | .250 | 50 |
| 62C-06 | 3/8 | 9/16-24 | 9/16 | 1.52 | .97 | .312 | 50 |
| 62C-07 | 7/16 | 5/8-24 | 5/8 | 1.70 | 1.02 | .312 | 10 |
| 62C-08 | 1/2 | 11/16-20 | 11/16 | 1.90 | 1.08 | .406 | 25 |
| 62C-10 | 5/8 | 13/16-18 | 13/16 | 2.06 | 1.23 | .500 | 10 |
| 62C-12 | 3/4 | 1-18 | 1 | 2.37 | 1.41 | .562 | 10 |
| 62C-14 | 7/8 | 1-1/8-18 | 1-1/8 | 2.07 | 1.19 | .766 | 10 |



UNION REDUCERS 62C

Reference SAE 060101 BA


| Part Number | 1 Tube Size | 2 Tube Size | 1 Str. Thread | 2 Str. Thread | Hex C | L | M | Flow Diameter | Std. Pkg. |
|-----------------|----------------|----------------|------------------|------------------|----------|------|------|---------------|-----------|
| 62C-0403 | 3/16 | 1/4 | 3/8-24 | 7/16-24 | 7/16 | 1.29 | .78 | .125 | 10 |
| 62C-0604 | 1/4 | 3/8 | 7/16-24 | 9/16-24 | 9/16 | 1.46 | .97 | .188 | 10 |
| 62C-0806 | 3/8 | 1/2 | 9/16-24 | 11/16-20 | 11/16 | 1.71 | 1.03 | .312 | 10 |
| 62C-1006 | 3/8 | 5/8 | 9/16-24 | 13/16-18 | 13/16 | 1.82 | 1.13 | .312 | 10 |



BULKHEAD UNION 62CBH

| Part Number | Tube Size | Straight Thread | Hex C | L | M | Flow Diameter | Std. Pkg. |
|-----------------|--------------|--------------------|----------|------|------|---------------|-----------|
| 62CBH-04 | 1/4 | 7/16-24 | 9/16 | 2.29 | 1.75 | .188 | 10 |
| 62CBH-06 | 3/8 | 9/16-24 | 11/16 | 2.42 | 1.88 | .312 | 10 |

63 Series




INSERTS 63PT

for industrial grade plastic tubing


| Part Number | Tube OD | Tube Wall | L | OD | Std. Pkg. |
|------------------|---------|-----------|-----|------|-----------|
| 63PT-0216 | 1/8 | .016 | .46 | .080 | 100 |
| 63PT-0223 | | .023 | .45 | .073 | 200 |
| 63PT-0325 | 3/16 | .025 | .45 | .135 | 100 |
| 63PT-0340 | | .040 | .52 | .095 | 100 |
| 63PT-0440 | 1/4 | .040 | .50 | .163 | 200 |
| 63PT-0462 | | .062 | .33 | .110 | 50 |
| 63PT-0540 | 5/16 | .040 | .50 | .232 | 100 |
| 63PT-0562 | | .062 | .53 | .187 | 100 |
| 63PT-0662 | 3/8 | .062 | .56 | .250 | 200 |
| 63PT-0862 | 1/2 | .062 | .72 | .370 | 100 |
| 63PT-1062 | 5/8 | .062 | .72 | .483 | 100 |

Delrin® sleeve 60 PT and Insert 63PT convert standard compression fittings for use with industrial grades of thermoplastic tubing.



FEMALE CONNECTOR 66C
Reference SAE 060103 BA


| Part Number | Tube Size | NPTF Thread | UNF Thread | Hex C | L | M | Flow Diameter | Std. Pkg. |
|-------------|-----------|-------------|------------|----------|-------|------|---------------|-----------|
| 66C-0202 | 1/8 | 1/8 | 5/16-24 | 9/16 | .95 | .75 | .094 | 10 |
| 66C-0302 | | | 1/8 | 3/8-24 | 9/16 | 1.02 | .78 | .125 |
| 66C-0304 | 3/16 | | 1/4 | 3/8-24 | 11/16 | 1.20 | .96 | .125 |
| 66C-0402 | | | 1/8 | 7/16-24 | 9/16 | 1.02 | .78 | .188 |
| 66C-0404 | 1/4 | | 1/4 | 7/16-24 | 11/16 | 1.24 | 1.00 | .188 |
| 66C-0502 | | | 1/8 | 1/2-24 | 9/16 | 1.07 | .81 | .250 |
| 66C-0504 | 5/16 | | 1/4 | 1/2-24 | 11/16 | 1.29 | 1.03 | .250 |
| 66C-0602 | | | 1/8 | 9/16-24 | 9/16 | 1.06 | .78 | .312 |
| 66C-0604 | | | 1/4 | 9/16-24 | 11/16 | 1.34 | 1.06 | .312 |
| 66C-0606 | 3/8 | | 3/8 | 9/16-24 | 13/16 | 1.34 | 1.06 | .312 |
| 66C-0608 | | | 1/2 | 9/16-24 | 1 | 1.54 | 1.27 | .312 |
| 66C-0804 | | | 1/4 | 11/16-20 | 11/16 | 1.49 | 1.09 | .406 |
| 66C-0806 | 1/2 | | 3/8 | 11/16-20 | 13/16 | 1.52 | 1.12 | .406 |
| 66C-0808 | | | 1/2 | 11/16-20 | 1 | 1.71 | 1.31 | .406 |
| 66C-1008 | 5/8 | | 1/2 | 13/16-18 | 1 | 1.80 | 1.38 | .500 |



MALE CONNECTOR 68C
Reference SAE 060102 BA

| Part Number | Tube Size | Pipe Thread | Straight Thread | Hex C | L | M | Flow Diameter | Std. Pkg. |
|-------------|-----------|-------------|-----------------|----------|--------|------|---------------|-----------|
| 68C-0202 | 1/8 | 1/8 | 5/16-24 | 7/16 | .97 | .77 | .094 | 25 |
| 68C-0302 | | | 1/8 | 3/8-24 | 7/16 | 1.08 | .84 | .125 |
| 68C-0304 | 3/16 | | 1/4 | 3/8-24 | 9/16 | 1.27 | 1.03 | .125 |
| 68C-0402 | | | 1/8 | 7/16-24 | 7/16 | 1.10 | .86 | .188 |
| 68C-0404 | | | 1/4 | 7/16-24 | 9/16 | 1.30 | 1.06 | .188 |
| 68C-0406 | 1/4 | | 3/8 | 7/16-24 | 11/16 | 1.27 | 1.03 | .188 |
| 68C-0408 | | | 1/2 | 7/16-24 | 7/8 | 1.55 | 1.31 | .188 |
| 68C-0502 | | | 1/8 | 1/2-24 | 1/2 | 1.15 | .89 | .234 |
| 68C-0504 | 5/16 | | 1/4 | 1/2-24 | 9/16 | 1.33 | 1.07 | .250 |
| 68C-0602 | | | 1/8 | 9/16-24 | 9/16 | 1.25 | .97 | .250 |
| 68C-0604 | | | 1/4 | 9/16-24 | 9/16 | 1.42 | 1.14 | .312 |
| 68C-0606 | 3/8 | | 3/8 | 9/16-24 | 11/16 | 1.44 | 1.16 | .312 |
| 68C-0608 | | | 1/2 | 9/16-24 | 7/8 | 1.53 | 1.25 | .312 |
| 68C-0704 | 7/16 | | 1/4 | 5/8-24 | 5/8 | 1.50 | 1.17 | .312 |
| 68C-0804 | | | 1/4 | 11/16-20 | 11/16 | 1.62 | 1.22 | .312 |
| 68C-0806 | 1/2 | | 3/8 | 11/16-20 | 11/16 | 1.60 | 1.20 | .406 |
| 68C-0808 | | | 1/2 | 11/16-20 | 7/8 | 1.71 | 1.31 | .406 |
| 68C-1006 | | | 3/8 | 13/16-18 | 13/16 | 1.73 | 1.31 | .406 |
| 68C-1008 | 5/8 | | 1/2 | 13/16-18 | 7/8 | 1.90 | 1.48 | .500 |
| 68C-1012 | | | 3/4 | 13/16-18 | 1-1/16 | 1.98 | 1.56 | .500 |
| 68C-1208 | | | 1/2 | 1-18 | 1 | 2.05 | 1.60 | .562 |
| 68C-1212 | 3/4 | | 3/4 | 1-18 | 1-1/16 | 2.08 | 1.63 | .656 |
| 68C-1412 | 7/8 | | 3/4 | 1-1/8-18 | 1-1/8 | 1.76 | 1.41 | .750 |

164C and 264C Series




164C

UNION TEE 164C-264C

Reference SAE 060401 BA

| Part Number | Tube Size 1 and 2 | Tube Size 3 | Straight Thread | L1 | L2 | L3 | M1 | M2 | M3 | Flow Diameter | Std. Pkg. |
|----------------------|-------------------|-------------|-----------------|------|------|------|------|------|------|---------------|-----------|
| 164C-02 | 1/8 | 1/8 | 5/16-24 | .82 | .82 | .82 | .61 | .61 | .61 | .094 | 10 |
| 264C-03 | 3/16 | 3/16 | 3/8-24 | .84 | .84 | .84 | .60 | .60 | .60 | .125 | 10 |
| 164C-04 | 1/4 | 1/4 | 7/16-24 | .86 | .86 | .86 | .61 | .61 | .61 | .188 | 25 |
| 164C-05 | 5/16 | 5/16 | 1/2-24 | .98 | .98 | .98 | .71 | .71 | .71 | .250 | 10 |
| 164C-06 | 3/8 | 3/8 | 9/16-24 | 1.03 | 1.03 | 1.03 | .74 | .74 | .74 | .312 | 25 |
| 164C-08 | 1/2 | 1/2 | 11/16-20 | 1.34 | 1.34 | 1.34 | .93 | .93 | .93 | .406 | 10 |
| 164C-10 | 5/8 | 5/8 | 13/16-18 | 1.54 | 1.54 | 1.54 | 1.08 | 1.08 | 1.08 | .500 | 10 |
| 164C-06-06-04 | 3/8 | 1/4 | --- | 1.03 | 1.03 | .96 | .75 | .75 | .72 | .188 | 25 |
| 164C-08-08-06 | 1/2 | 3/8 | --- | 1.34 | 1.34 | 1.16 | .94 | .94 | .88 | .312 | 10 |

165C Series


**UNION ELBOW 165C**

Reference SAE 060201 BA

| Part Number | Tube Size | Straight Thread | L | M | Flow Diameter | Std. Pkg. |
|----------------|-----------|-----------------|------|------|---------------|-----------|
| 165C-02 | 1/8 | 5/16-24 | .82 | .61 | .094 | 10 |
| 165C-03 | 3/16 | 3/8-24 | .87 | .61 | .125 | 10 |
| 165C-04 | 1/4 | 7/16-24 | .88 | .61 | .188 | 10 |
| 165C-05 | 5/16 | 1/2-24 | .95 | .71 | .250 | 10 |
| 165C-06 | 3/8 | 9/16-24 | 1.03 | .74 | .312 | 10 |
| 165C-07 | 7/16 | 5/8-24 | 1.16 | .82 | .312 | 5 |
| 165C-08 | 1/2 | 11/16-20 | 1.34 | .93 | .406 | 10 |
| 165C-10 | 5/8 | 13/16-18 | 1.48 | 1.05 | .500 | 10 |
| 165C-12 | 3/4 | 1-18 | 1.65 | 1.17 | .560 | 5 |

Compression Fittings


169C and 269C Series



MALE ELBOW 169C-269C
Reference SAE 060202 BA

| Part Number | Tube Size | Pipe Thread | Straight Thread | L | M | N | Flow Diameter D | Std. Pkg. |
|------------------|-----------|-------------|-----------------|------|------|------|-----------------|-----------|
| 269C-0202 | 1/8 | 1/8 | 5/16-24 | .80 | .60 | .67 | .094 | 10 |
| 169C-0302 | | 1/8 | 3/8-24 | .84 | .61 | .69 | .125 | 10 |
| 169C-0304 | | 1/4 | 3/8-24 | .86 | .64 | .93 | .125 | 10 |
| 169C-0402 | | 1/8 | 7/16-24 | .86 | .61 | .74 | .188 | 50 |
| 169C-0404 | | 1/4 | 7/16-24 | .86 | .62 | .94 | .188 | 50 |
| 169C-0406 | | 3/8 | 7/16-24 | .93 | .68 | 1.00 | .188 | 10 |
| 169C-0502 | | 1/8 | 1/2-24 | .88 | .61 | .74 | .234 | 10 |
| 169C-0504 | | 1/4 | 1/2-24 | .95 | .71 | .93 | .250 | 25 |
| 169C-0506 | | 3/8 | 1/2-24 | 1.01 | .75 | 1.00 | .250 | 10 |
| 169C-0602 | | 1/8 | 9/16-24 | 1.03 | .74 | .74 | .234 | 10 |
| 169C-0604 | | 1/4 | 9/16-24 | 1.03 | .74 | .93 | .312 | 25 |
| 169C-0606 | | 3/8 | 9/16-24 | 1.03 | .75 | 1.00 | .312 | 25 |
| 169C-0608 | | 1/2 | 9/16-24 | 1.22 | .94 | 1.27 | .312 | 10 |
| 169C-0804 | | 1/4 | 11/16-20 | 1.34 | .94 | 1.00 | .312 | 10 |
| 169C-0806 | | 1/2 | 11/16-20 | 1.34 | .93 | 1.11 | .406 | 10 |
| 169C-0808 | | 1/2 | 11/16-20 | 1.48 | 1.06 | 1.15 | .406 | 10 |
| 169C-1008 | 5/8 | 1/2 | 13/16-18 | 1.48 | 1.06 | 1.31 | .500 | 10 |
| 169C-1208 | | 1/2 | 1-18 | 1.64 | 1.18 | 1.49 | .562 | 5 |
| 169C-1212 | 3/4 | 3/4 | 1-18 | 1.70 | 1.27 | 1.58 | .562 | 5 |


170C Series



FEMALE ELBOW 170C
Reference SAE 060203 BA

| Part Number | Tube Size | Pipe Thread | Straight Thread | L | M | N | Flow Diameter D | Std. Pkg. |
|------------------|-----------|-------------|-----------------|------|------|-----|-----------------|-----------|
| 170C-0202 | 1/8 | 1/8 | 5/16-24 | .89 | .69 | .56 | .094 | 10 |
| 170C-0302 | 3/16 | 1/8 | 3/8-24 | .98 | .73 | .56 | .125 | 25 |
| 170C-0402 | | 1/8 | 7/16-24 | .93 | .69 | .56 | .188 | 25 |
| 170C-0404 | | 1/4 | 7/16-24 | 1.02 | .78 | .70 | .188 | 25 |
| 170C-0604 | | 1/4 | 9/16-24 | 1.06 | .79 | .73 | .312 | 10 |
| 170C-0606 | | 3/8 | 9/16-24 | 1.22 | .94 | .69 | .312 | 10 |
| 170C-0704 | 7/16 | 1/4 | 5/8-24 | 1.27 | .93 | .73 | .312 | 5 |
| 170C-0806 | 1/2 | 3/8 | 11/16-20 | 1.34 | 1.00 | .69 | .406 | 10 |


171C Series



MALE RUN TEE 171C

| Part Number | Tube Size | Pipe Thread | Straight Thread | L | M | N | Flow Diameter D | Std. Pkg. |
|------------------|-----------|-------------|-----------------|------|-----|------|-----------------|-----------|
| 171C-0202 | 1/8 | 1/8 | 5/16-24 | .82 | .61 | .71 | .094 | 10 |
| 171C-0302 | 3/16 | 1/8 | 3/8-24 | .86 | .61 | .71 | .125 | 10 |
| 171C-0402 | | 1/8 | 7/16-24 | .90 | .64 | .75 | .188 | 10 |
| 171C-0404 | | 1/4 | 7/16-24 | .93 | .69 | .72 | .188 | 10 |
| 171C-0604 | | 3/8 | 9/16-24 | 1.09 | .81 | 1.03 | .312 | 10 |


172C Series



MALE BRANCH TEE 172C
Reference SAE 060425 BA

| Part Number | Tube Size | Pipe Thread | Straight Thread | L | M | N | Flow Diameter D | Std. Pkg. |
|-------------|-----------|-------------|-----------------|------|-----|------|-----------------|-----------|
| 172C-0202 | 1/8 | 1/8 | 5/16-24 | .82 | .61 | .71 | .094 | 10 |
| 172C-0302 | 3/16 | 1/8 | 3/8-24 | .86 | .61 | .71 | .125 | 10 |
| 172C-0402 | 1/4 | 1/8 | 7/16-24 | .86 | .61 | .74 | .188 | 10 |
| 172C-0404 | | 1/4 | 7/16-24 | .93 | .69 | .92 | .188 | 10 |
| 172C-0602 | 3/8 | 1/8 | 9/16-24 | 1.03 | .75 | .75 | .234 | 10 |
| 172C-0604 | | 1/4 | 9/16-24 | 1.09 | .77 | 1.03 | .312 | 10 |
| 172C-0606 | | 3/8 | 9/16-24 | 1.09 | .81 | 1.00 | .312 | 10 |
| 172C-0806 | 1/2 | 3/8 | 11/16-20 | 1.34 | .93 | 1.10 | .406 | 10 |


176C Series



ADAPTER TEE 176C

| Part Number | Tube Size | Pipe Thread | Straight Thread | L | M | N | N ¹ | Flow Diameter D | Std. Pkg. |
|-------------|-----------|-------------|-----------------|-----|-----|-----|----------------|-----------------|-----------|
| 176C-0402 | 1/4 | 1/8 | 7/16-24 | .93 | .69 | .75 | .66 | .189 | 10 |


177C Series



FEMALE BRANCH TEE 177C


| Part Number | Tube Size | Pipe Thread | Straight Thread | L | M | N | Flow Diameter D | Std. Pkg. |
|-------------|-----------|-------------|-----------------|-----|-----|-----|-----------------|-----------|
| 177C-0402 | 1/4 | 1/8 | 7/16-24 | .86 | .63 | .53 | .188 | 10 |

179C Series




45° ELBOW 179C

| Part Number | Tube Size | Pipe Thread | Straight Thread | L | M | N | Flow Diameter D | Std. Pkg. |
|-------------|-----------|-------------|-----------------|------|-----|-----|-----------------|-----------|
| 179C-0402 | 1/4 | 1/8 | 7/16-24 | .90 | .66 | .56 | .188 | 10 |
| 179C-0404 | | 1/4 | 7/16-24 | .80 | .56 | .84 | .188 | 10 |
| 179C-0602 | 3/8 | 1/8 | 9/16-24 | .90 | .63 | .65 | .234 | 10 |
| 179C-0604 | | 1/4 | 9/16-24 | .90 | .63 | .84 | .312 | 10 |
| 179C-0606 | | 3/8 | 9/16-24 | .97 | .75 | .95 | .312 | 10 |
| 179C-0806 | 1/2 | 3/8 | 11/16-20 | 1.15 | .81 | .95 | .406 | 10 |

**SEAL PLUG 639C**

| Part Number | Tube Size | Straight Thread | Hex C | L | M | Std. Pkg. |
|----------------|-----------|-----------------|-------|-----|-----|-----------|
| 639C-04 | 1/4 | 7/16-24 | 7/16 | .74 | .50 | 25 |

**STRAIGHT THROUGH TANK FITTING 682C**

| Part Number | Tube Size | Pipe Thread | Straight Thread | Hex C | L | M | Flow Diameter D | Std. Pkg. |
|------------------|-----------|-------------|-----------------|-------|------|------|-----------------|-----------|
| 682C-0302 | 3/16 | 1/8 | 3/8-24 | 7/16 | 1.06 | .84 | .195 | 10 |
| 682C-0606 | 3/8 | 3/8 | 9/16-24 | 11/16 | 1.44 | 1.16 | .387 | 10 |
| 682C-0808 | 1/2 | 1/2 | 11/16-20 | 7/8 | 1.90 | 1.31 | .516 | 10 |

Specifications:

Listed with Underwriter's Laboratories for flammable liquid. Compression fittings meet functional requirements of SAE J-512, ASA and ASME.

Applications:

Use with copper, aluminum and thermoplastic tubing. Not recommended for steel tubing. Manufactured for low and medium pressure tubing connection work where excessive vibration or tube movement is not involved. Not recommended for applications using gaseous media.

Working Pressure Ranges:

Temperature and type of tubing used are important factors and the table to the right is a good guide for proper selection. Temperature **73°F**. For thermoplastic tubing see manufacturers recommendation for pressure range.

Temperature Ranges:

From **-65° to +250°F** with soft metal tubing. For thermoplastic tubing see manufacturers recommendation for tubing temperature range.

Assembly Instructions:

- Slide nut, then sleeve onto tubing. The thread end of the nut must face out.
- Insert the tube into the fitting. Be sure the tube is bottomed on the fitting shoulder.
- Assemble nut to body, and tighten 'hand tight'. Then follow the number of wrench turns as indicated in the table to the right.

| PSI | Tube OD (inches) | Tube Wall (inches) |
|-----|------------------|--------------------|
| 400 | 1/8 | .030 |
| 400 | 3/16 | .030 |
| 300 | 1/4 | .030 |
| 300 | 5/16 | .032 |
| 200 | 3/8 | .032 |
| 200 | 1/2 | .032 |
| 150 | 5/8 | .035 |
| 100 | 3/4 | .035 |
| 75 | 7/8 | .035 |

| Fitting Size | Tube Size | Turns required to seal from hand tight | |
|--------------|-----------|--|-------------------------------|
| | | 60C with soft metal tubing | 60C with thermoplastic tubing |
| 2 | 1/8 | 1-1/4 | -- |
| 3 | 3/16 | 1-1/4 | -- |
| 4 | 1/4 | 1-1/4 | 2 |
| 5 | 5/16 | 1-1/4 | 2 |
| 6 | 3/8 | 2-1/4 | 2 |
| 8 | 1/2 | 2-1/4 | 2 |
| 10 | 5/8 | 2-1/4 | 2 |
| 12 | 3/4 | 2-1/4 | 2 |
| 14 | 7/8 | 2-1/4 | -- |

Features:

- Maximum working pressure: **150 PSI**
- Temperature range: **-40°F to + 200°F**

**TUBING NAB**

Reference SAE J844, TYPE A and B, D.O.T. FMVSS 106

| Part Number | Tube Size | Standard Color | Std. Pkg. |
|--------------|-----------|----------------|-----------|
| NAB3 | 3/16 | black | 100' |
| NAB4 | 1/4 | black | 100' |
| NAB4B | 1/4 | blue | 100' |
| NAB4R | 1/4 | red | 100' |
| NAB6 | 3/8 | black | 100' |
| NAB6B | 3/8 | blue | 100' |
| NAB6R | 3/8 | red | 100' |
| NAB8 | 1/2 | black | 100' |
| NAB10 | 5/8 | black | 100' |
| NAB12 | 3/4 | black | 100' |

TUBING CUTTER

| Part Number | Description |
|---------------|-------------------|
| TC97 | Maximum OD 9/16" |
| TC97RB | Replacement blade |

**AIR BRAKE FITTINGS****Application:**

- Designed for use in air brake systems or cab controls


Features:

- Utilize ribbed sleeve for compression and positive grip
- Machined from CA360, CA345, or CA377 brass
- Pre-applied thread sealant on all male pipe threads
- Maximum operating pressure: **150 PSI**
- Temperature range: **-40°F to 200°F**
- Compatible tubing: SAE J844 type A and B
- Specifications: meets D.O.T FMVSS 571.106 and SAE J1131, and SAE J2494


Assembly Instructions:

1. Cut tubing squarely - maximum of 15° angle allowance.
2. Check that port or mating part is clean and free of debris.
3. Insert tubing into fitting until it bottoms on seat.
4. Tighten nut with wrench until one thread remains visible on the fitting body (this will allow for a number of remakes) or, the nut should be screwed down finger tight, then wrench-tightened as indicated in the table to the right.

| Tube Size | Turns required to seal from hand tight |
|-------------|--|
| 3/16 | 2-1/2 |
| 1/4 | 3 |
| 3/8 and 1/2 | 4 |
| 5/8 and 3/4 | 3-1/2 |


SLEEVE 60NAB
Reference SAE 100115

| Part Number | Tube Size | A | D | L | Std. Pkg. |
|----------------|-----------|------|------|-----|-----------|
| 60NAB3 | 3/16 | .255 | .194 | .23 | 100 |
| 60NAB4 | 1/4 | .356 | .256 | .30 | 100 |
| 60NAB6 | 3/8 | .479 | .384 | .39 | 100 |
| 60NAB8 | 1/2 | .624 | .509 | .43 | 100 |
| 60NAB10 | 5/8 | .746 | .634 | .49 | 100 |
| 60NAB12 | 3/4 | .922 | .760 | .54 | 50 |




NUT 61NAB
Reference SAE 100110

| Part Number | Tube Size | Straight Thread | Hex C | D | L | Std. Pkg. |
|----------------|-----------|-----------------|-------|------|-----|-----------|
| 61NAB3 | 3/16 | 5/16-24 | 7/16 | .194 | .40 | 100 |
| 61NAB4 | 1/4 | 7/16-24 | 9/16 | .256 | .45 | 100 |
| 61NAB6 | 3/8 | 17/32-24 | 5/8 | .384 | .63 | 100 |
| 61NAB8 | 1/2 | 11/16-20 | 13/16 | .509 | .72 | 50 |
| 61NAB10 | 5/8 | 13/16-18 | 15/16 | .634 | .77 | 25 |
| 61NAB12 | 3/4 | 1-18 | 1-1/8 | .762 | .81 | 25 |




UNION 62NAB
Reference SAE 100101 BA

| Part Number | Tube Size | Straight Thread | Hex B | Hex C | L | M | Flow D | Std. Pkg. |
|----------------|-----------|-----------------|-------|-------|------|------|--------|-----------|
| 62NAB4 | 1/4 | 7/16-24 | 9/16 | 7/16 | 1.49 | .83 | .137 | 10 |
| 62NAB6 | 3/8 | 17/32-24 | 5/8 | 9/16 | 2.00 | 1.08 | .217 | 10 |
| 62NAB8 | 1/2 | 11/16-20 | 13/16 | 11/16 | 2.33 | 1.29 | .338 | 10 |
| 62NAB10 | 5/8 | 13/16-18 | 15/16 | 13/16 | 2.39 | 1.41 | .398 | 10 |
| 62NAB12 | 3/4 | 1-18 | 1-1/8 | 1 | 2.60 | 1.58 | .523 | 10 |




BULKHEAD UNION 62NABH
(NAB and air brake)

| Part Number | Tube Size | Straight Thread | Hex B | Hex C | L | M | Flow D | Std. Pkg. |
|----------------|-----------|-----------------|-------|-------|------|------|--------|-----------|
| 62NABH4 | 1/4 | 7/16-24 | 9/16 | 9/16 | 2.28 | 1.38 | .137 | 10 |
| 62NABH6 | 3/8 | 17/32-24 | 11/16 | 3/4 | 2.97 | 1.62 | .217 | 10 |
| 62NABH8 | 1/2 | 11/16-20 | 13/16 | 1 | 3.36 | 1.88 | .338 | 10 |




BULKHEAD UNION 62NBH


| Part Number | Tube Size | Straight Thread | Hex B | Hex C | L | M | Flow D | Std. Pkg. |
|----------------|-----------|-----------------|-------|-------|------|------|--------|-----------|
| 62NBH3 | 3/16 | 5/16-24 | 7/16 | 7/16 | 1.80 | 1.21 | .087 | 10 |
| 62NBH4 | 1/4 | 7/16-24 | 9/16 | 9/16 | 2.04 | 1.38 | .137 | 10 |
| 62NBH6 | 3/8 | 17/32-24 | 11/16 | 3/4 | 2.54 | 1.62 | .21 | 10 |
| 62NBH8 | 1/2 | 11/16-20 | 13/16 | 1 | 2.92 | 1.88 | .33 | 10 |
| 62NBH10 | 5/8 | 13/16-18 | 15/16 | 1 | 3.04 | 2.02 | .398 | 10 |

**BULKHEAD UNION 62NFBH**


| Part Number | Tube Size | Straight Thread | Hex B | Hex C | L | M | D | Std. Pkg. |
|-----------------|-----------|-----------------|-------|-------|------|------|------|-----------|
| 62NFBH4 | 1/4 | 7/16-24 | 9/16 | 9/16 | 2.04 | 1.38 | .137 | 10 |
| 62NFBH6 | 3/8 | 17/32-24 | 11/16 | 3/4 | 2.54 | 1.62 | .217 | 10 |
| 62NFBH8 | 1/2 | 11/16-20 | 13/16 | 1 | 2.92 | 1.88 | .338 | 10 |
| 62NFBH10 | 5/8 | 13/16-18 | 15/16 | 1 | 3.04 | 2.02 | .398 | 10 |

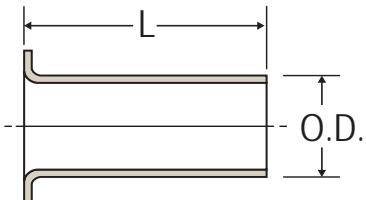**STAINLESS INSERT 63NAB**
(for SAE J844 tubing)

| Part Number | Tube Size | L | OD | Std. Pkg. |
|----------------|-----------|------|------|-----------|
| 63NAB4 | 1/4 | .53 | .163 | 200 |
| 63NAB6 | 3/8 | .64 | .245 | 200 |
| 63NAB8 | 1/2 | .81 | .370 | 100 |
| 63NAB10 | 5/8 | .86 | .434 | 100 |
| 63NAB12 | 3/4 | 1.04 | .559 | 100 |


**UNION TEE 64NAB**
Reference SAE 100401 BA

| Part Number | Tube Size | Straight Thread | L | M | Flow D | Std. Pkg. |
|----------------|-----------|-----------------|------|------|--------|-----------|
| 64NAB4 | 1/4 | 7/16-24 | .95 | .62 | .13 | 25 |
| 64NAB6 | 3/8 | 17/32-24 | 1.24 | .78 | .21 | 25 |
| 64NAB8 | 1/2 | 11/16-20 | 1.45 | .93 | .33 | 10 |
| 64NAB10 | 5/8 | 13/16-18 | 1.58 | 1.09 | .39 | 10 |


**UNION ELBOW 65NAB**

Reference SAE 100201 BA

| Part Number | Tube Size | Straight Thread | L | M | Flow D | Std. Pkg. |
|----------------|-----------|-----------------|------|------|--------|-----------|
| 65NAB4 | 1/4 | 7/16-24 | .95 | .62 | .13 | 10 |
| 65NAB6 | 3/8 | 17/32-24 | 1.25 | .79 | .21 | 10 |
| 65NAB8 | 1/2 | 11/16-20 | 1.45 | .93 | .33 | 10 |
| 65NAB10 | 5/8 | 13/16-18 | 1.58 | 1.09 | .39 | 10 |

**BULKHEAD UNION 66NBH**


| Part Number | Tube Size | Pipe Size | Straight Thread A | Straight Thread E | Hex B | Hex C | L | M | Flow D | Std. Pkg. |
|----------------|-----------|-----------|-------------------|-------------------|--------|--------|------|------|--------|-----------|
| 66NBH86 | 1/2 | 3/8 | 11/16-20 | 7/8-14 | 1-1/16 | 1-1/16 | 1.94 | 1.42 | .338 | 10 |

**FEMALE CONNECTOR 66NAB**

Reference SAE 100103 BA

| Part Number | Tube Size | Pipe Thread | Straight Thread | Hex C | L | M | Flow D | Std. Pkg. |
|------------------|-----------|-------------|-----------------|--------|------|------|--------|-----------|
| 66NAB42 | 1/4 | 1/8 | 7/16-24 | 9/16 | 1.17 | .84 | .13 | 25 |
| 66NAB44 | 1/4 | 1/8 | 7/16-24 | 11/16 | 1.40 | 1.07 | .13 | 10 |
| 66NAB62 | 3/8 | 1/8 | 17/32-24 | 9/16 | 1.46 | 1.00 | .21 | 10 |
| 66NAB64 | 1/4 | 1/8 | 17/32-24 | 11/16 | 1.64 | 1.18 | .21 | 10 |
| 66NAB86 * | 1/2 | 3/8 | 11/16-20 | 7/8 | 1.79 | 1.27 | .33 | 10 |
| 66NAB88 | 1/2 | 1/2 | 11/16-20 | 1-1/16 | 1.91 | 1.38 | .33 | 10 |
| 66NAB106 | 5/8 | 3/8 | 13/16-18 | 7/8 | 1.87 | 1.38 | .39 | 10 |
| 66NAB108 | 5/8 | 1/2 | 13/16-18 | 1-1/16 | 1.99 | 1.60 | .39 | 10 |


* Not full hex as shown

**MALE CONNECTOR 68NAB**

Reference SAE 100102 BA

Thread sealant may be white or burnt orange


| Part Number | Tube Size | Pipe Thread | Straight Thread | Hex C | L | M | Flow D | Std. Pkg. |
|--------------------|-----------|-------------|-----------------|--------|------|------|--------|-----------|
| 68NAB31VS | | 1/16 | 5/16-24 | 3/8 | 1.16 | .87 | .087 | 25 |
| 68NAB32VS | 3/16 | 1/8 | 5/16-24 | 7/16 | 1.15 | .86 | .087 | 50 |
| 68NAB34VS | | 1/4 | 5/16-24 | 9/16 | 1.35 | 1.05 | .087 | 25 |
| 68NAB42VS | | 1/8 | 7/16-24 | 7/16 | 1.22 | .89 | .13 | 50 |
| 68NAB44VS | 1/4 | 1/4 | 7/16-24 | 9/16 | 1.43 | 1.09 | .13 | 50 |
| 68NAB46VS | | 3/8 | 7/16-24 | 11/16 | 1.47 | 1.14 | .13 | 10 |
| 68NAB62VS | | 1/8 | 17/32-24 | 9/16 | 1.49 | 1.03 | .21 | 25 |
| 68NAB64VS | 3/8 | 1/4 | 17/32-24 | 9/16 | 1.67 | 1.21 | .21 | 25 |
| 68NAB66VS | | 3/8 | 17/32-24 | 11/16 | 1.70 | 1.21 | .21 | 25 |
| 68NAB68VS | | 1/2 | 17/32-24 | 7/8 | 1.89 | 1.43 | .21 | 25 |
| 68NAB84VS | | 1/4 | 11/16-20 | 11/16 | 1.85 | 1.32 | .33 | 10 |
| 68NAB86VS | 1/2 | 3/8 | 11/16-20 | 11/16 | 1.85 | 1.32 | .33 | 25 |
| 68NAB88VS | | 1/2 | 11/16-20 | 7/8 | 2.04 | 1.52 | .33 | 25 |
| 68NAB106VS | 5/8 | 3/8 | 13/16-18 | 13/16 | 1.86 | 1.37 | .398 | 10 |
| 68NAB108VS | | 1/2 | 13/16-18 | 7/8 | 2.07 | 1.56 | .398 | 10 |
| 68NAB126VS | | 3/8 | 1-18 | 1 | 2.00 | 1.49 | .440 | 10 |
| 68NAB128VS | 3/4 | 1/2 | 1-18 | 1 | 2.19 | 1.68 | .523 | 10 |
| 68NAB1212VS | | 3/4 | 1-18 | 1-1/16 | 2.22 | 1.71 | .523 | 10 |

**MALE ELBOW 69NAB**

Reference SAE 100202 BA

Thread sealant may be white or burnt orange


| Part Number | Tube Size | Pipe Thread | Straight Thread | L | M | N | Flow D | Std. Pkg. |
|--------------------|-----------|-------------|-----------------|------|------|------|--------|-----------|
| 69NAB32VS | 3/16 | 1/8 | 5/16-24 | .90 | .60 | .67 | .087 | 10 |
| 69NAB34VS | | 1/4 | 5/16-24 | .91 | .62 | .87 | .087 | 10 |
| 69NAB42VS | | 1/8 | 7/16-24 | .95 | .62 | .66 | .13 | 50 |
| 69NAB44VS | 1/4 | 1/4 | 7/16-24 | 1.00 | .68 | .87 | .13 | 50 |
| 69NAB46VS | | 3/8 | 7/16-24 | 1.16 | .73 | .86 | .13 | 10 |
| 69NAB62VS | | 1/8 | 17/32-24 | 1.19 | .73 | .75 | .21 | 10 |
| 69NAB64VS | 3/8 | 1/4 | 17/32-24 | 1.25 | .79 | .92 | .21 | 25 |
| 69NAB66VS | | 3/8 | 17/32-24 | 1.30 | .84 | .91 | .21 | 25 |
| 69NAB68VS | | 1/2 | 17/32-24 | 1.40 | .94 | 1.10 | .21 | 10 |
| 69NAB84VS | | 1/4 | 11/16-20 | 1.38 | .86 | .99 | .33 | 10 |
| 69NAB86VS | 1/2 | 3/8 | 11/16-20 | 1.44 | .92 | .99 | .33 | 10 |
| 69NAB88VS | | 1/2 | 11/16-20 | 1.55 | 1.03 | 1.18 | .33 | 10 |
| 69NAB106VS | 5/8 | 3/8 | 13/16-18 | 1.49 | 1.00 | 1.05 | .39 | 10 |
| 69NAB108VS | | 1/2 | 13/16-18 | 1.58 | 1.09 | 1.24 | .39 | 5 |
| 69NAB128VS | 3/4 | 1/2 | 1-18 | 1.70 | 1.19 | 1.33 | .52 | 5 |
| 69NAB1212VS | | 3/4 | 1-18 | 1.77 | 1.26 | 1.32 | .52 | 5 |



FEMALE ELBOW 70NAB
Reference SAE 100203 BA


| Part Number | Tube Size | Pipe Thread | Straight Thread | L | M | N | Flow D | Std. Pkg. |
|------------------|-----------|-------------|-----------------|------|------|------|--------|-----------|
| 70NAB32 | 3/16 | 1/8 | 5/16-24 | .96 | .67 | .52 | .087 | 10 |
| 70NAB42 | 1/4 | 1/8 | 7/16-24 | 1.02 | .69 | .52 | .13 | 10 |
| 70NAB44 | | 1/4 | 7/16-24 | 1.11 | .78 | .71 | .13 | 50 |
| 70NAB62 | | 1/8 | 17/32-24 | 1.29 | .83 | .59 | .21 | 50 |
| 70NAB64 * | 3/8 | 1/4 | 17/32-24 | 1.25 | .80 | .58 | .21 | 10 |
| 70NAB66 | | 3/8 | 17/32-24 | 1.39 | .93 | .77 | .21 | 10 |
| 70NAB86 | 1/2 | 3/8 | 11/16-20 | 1.55 | 1.03 | .82 | .33 | 25 |
| 70NAB88 | | 1/2 | 11/16-20 | 1.65 | 1.13 | 1.01 | .33 | 25 |
| 70NAB108 | 5/8 | 1/2 | 13/16-18 | 1.70 | 1.19 | 1.07 | .39 | 10 |

* Rounded elbow - part not as pictured

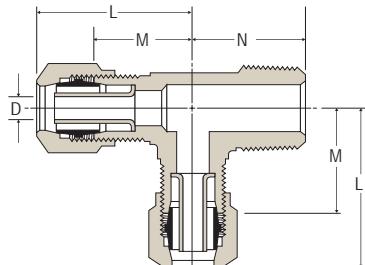

MALE RUN TEE 71NAB
Reference SAE 100424 BA
Thread sealant may be white or burnt orange


| Part Number | Tube Size | Pipe Thread | Straight Thread | L | M | N | Flow D | Std. Pkg. |
|-------------------|-----------|-------------|-----------------|------|------|------|--------|-----------|
| 71NAB42VS | 1/4 | 1/8 | 7/16-24 | .95 | .62 | .66 | .13 | 10 |
| 71NAB44VS | | 1/4 | 7/16-24 | 1.00 | .68 | .87 | .13 | 10 |
| 71NAB64VS | | 1/4 | 17/32-24 | 1.25 | .79 | .92 | .21 | 10 |
| 71NAB66VS | 3/8 | 3/8 | 17/32-24 | 1.30 | .84 | .91 | .21 | 10 |
| 71NAB86VS | | 3/8 | 11/16-20 | 1.45 | .93 | .99 | .33 | 10 |
| 71NAB88VS | 1/2 | 1/2 | 11/16-20 | 1.55 | 1.03 | 1.18 | .33 | 10 |
| 71NAB108VS | 5/8 | 1/2 | 13/16-18 | 1.60 | 1.09 | 1.24 | .39 | 10 |

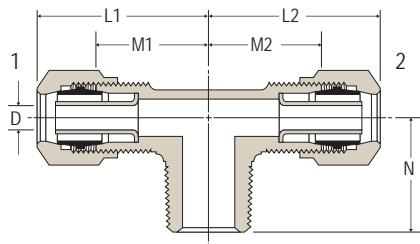**MALE BRANCH TEE 72NAB**

Reference SAE 100425 BA

Thread sealant may be white or burnt orange

| Part Number | Tube 1 | Tube 2 | Pipe Thread | Straight Thread | L ¹ | L ² | M ¹ | M ² | N | Flow D | Std. Pkg. |
|-------------------|--------|--------|-------------|-----------------|----------------|----------------|----------------|----------------|------|--------|-----------|
| 72NAB32VS | 3/16 | 3/16 | 1/8 | 7/16-24 | .90 | .90 | .61 | .61 | .66 | .087 | 10 |
| 72NAB42VS | 1/4 | 1/4 | 1/8 | 7/16-24 | .95 | .95 | .62 | .62 | .66 | .13 | 10 |
| 72NAB44VS | | 1/4 | 1/4 | 7/16-24 | 1.00 | 1.00 | .68 | .68 | .87 | .13 | 10 |
| 72NAB62VS | | 3/8 | 1/8 | 17/32-24 | 1.18 | 1.18 | .72 | .72 | .75 | .217 | 10 |
| 72NAB64VS | 3/8 | 3/8 | 1/4 | 17/32-24 | 1.25 | 1.25 | .81 | .81 | .92 | .21 | 10 |
| 72NAB66VS | | 3/8 | 3/8 | 17/32-24 | 1.30 | 1.30 | .84 | .84 | .91 | .21 | 10 |
| 72NAB84VS | | 1/2 | 1/4 | 11/16-20 | 1.41 | 1.41 | .89 | .89 | .99 | .33 | 10 |
| 72NAB86VS | 1/2 | 1/2 | 3/8 | 11/16-20 | 1.45 | 1.45 | .93 | .93 | .99 | .33 | 10 |
| 72NAB88VS | | 1/2 | 1/2 | 11/16-20 | 1.55 | 1.55 | 1.03 | 1.03 | 1.17 | .33 | 10 |
| 72NAB108VS | 5/8 | 5/8 | 1/2 | 13/16-18 | 1.60 | 1.60 | 1.09 | 1.09 | 1.24 | .39 | 10 |

**45° ELBOW 79NAB**

Reference SAE 100302 BA

Thread sealant may be white or burnt orange

| Part Number | Tube Size | Pipe Thread | Straight Thread | L | M | N | Flow D | Std. Pkg. |
|-------------------|-----------|-------------|-----------------|------|------|------|--------|-----------|
| 79NAB42VS | 1/4 | 1/8 | 7/16-24 | .81 | .49 | .63 | .13 | 10 |
| 79NAB44VS | | 1/4 | 7/16-24 | .93 | .60 | .85 | .13 | 10 |
| 79NAB62VS | | 1/8 | 17/32-24 | 1.17 | .71 | .68 | .21 | 10 |
| 79NAB64VS | 3/8 | 1/4 | 17/32-24 | 1.17 | .71 | .85 | .21 | 10 |
| 79NAB66VS | | 3/8 | 17/32-24 | 1.21 | .75 | .94 | .21 | 10 |
| 79NAB68VS | | 1/2 | 17/32-24 | 1.24 | .78 | 1.16 | .21 | 10 |
| 79NAB84VS | | 1/4 | 11/16-20 | 1.36 | .84 | .94 | .33 | 10 |
| 79NAB86VS | 1/2 | 3/8 | 11/16-20 | 1.36 | .84 | .94 | .33 | 10 |
| 79NAB88VS | | 1/2 | 11/16-20 | 1.39 | .87 | 1.16 | .33 | 10 |
| 79NAB106VS | 5/8 | 3/8 | 13/16-18 | 1.43 | .94 | .98 | .39 | 5 |
| 79NAB108VS | | 1/2 | 13/16-18 | 1.42 | .93 | 1.16 | .39 | 5 |
| 79NAB128VS | 3/4 | 1/2 | 1-18 | 1.61 | 1.10 | 1.18 | .51 | 2 |

AIR BRAKE FITTINGS - RUBBER HOSE**Application:**

- For use with SAEJ1402 air brake hose in making hose assemblies

Compliances:

- Will meet D.O.T. FMVSS 571-106 standards when used with SAE J1402 Air Brake Hose

Material:


- Brass: Alloy 360

Performance:


- Working Pressure: up to **225 PSI**
- Temperature: **-50°F to +212°F**

Assembly Instructions:


1. Slide nut onto hose
2. Slide sleeve onto hose with tapered edge toward fitting body
3. Firmly bottom the hose into fittings
4. Screw nut onto body until it contacts the fitting's body hex

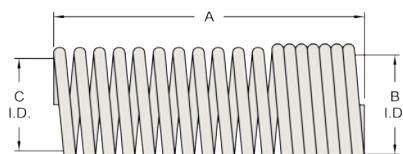
56RBSG
Spring


| Part Number | Hose Size | A | B | C | Std. Pkg. |
|------------------|-----------|------|-----|-----|-----------|
| 56RBSG-06 | 3/8 | 2.70 | .87 | .87 | 5 |
| 56RBSG-08 | 1/2 | 2.70 | .96 | .96 | 5 |


60RB
Sleeve


| Part Number | Hose Size | A Length | B O.D. | C I.D. | Std. Pkg. |
|----------------|-----------|-------------|-----------|-----------|-----------|
| 60RB-06 | 3/8 | .64 | .91 | .80 | 10 |
| 60RB-08 | 1/2 | .64 | 1.02 | .92 | 5 |


61RB
Nut


| Part Number | Hose Size | C Thread | Hex | A Length | B I.D. | Std. Pkg. |
|----------------|-----------|-------------|--------|-------------|-----------|-----------|
| 61RB-06 | 3/8 | 31/32-20 | 1-1/32 | 1.13 | .78 | 10 |
| 61RB-08 | 1/2 | 1-3/32-20 | 1-1/4 | 1.20 | .92 | 10 |


61RBSG
Spring Guard Nut


| Part Number | Hose Size | Straight Thread | Hex | A | B | Std. Pkg. |
|------------------|-----------|-----------------|--------|------|-----|-----------|
| 61RBSG-06 | 3/8 | 31/32-20 | 1-1/32 | 1.20 | .78 | 5 |
| 61RBSG-08 | 1/2 | 1-3/32-20 | 1-1/4 | 1.20 | .92 | 5 |

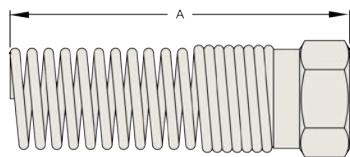**67RBSG***Air Brake Hose Nut & Attached Spring*

| Part Number | Length | Std. Pkg. |
|------------------|--------|-----------|
| 67RBSG-06 | 3.55 | 5 |
| 67RBSG-08 | 3.50 | 5 |

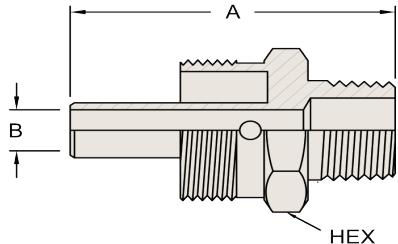**68RB***Male Connector Body Only*

| Part Number | Hose Size | Straight Thread | Pipe Thread | Hex | A | B | Std. Pkg. |
|-------------------|-----------|-----------------|-------------|-------|------|------|-----------|
| 68RB-0604B | | 31/32-20 | 1/4 | 31/32 | 1.93 | .299 | 10 |
| 68RB-0606B | 3/8 | 31/32-20 | 3/8 | 31/32 | 1.93 | .299 | 10 |
| 68RB-0608B | | 31/32-20 | 1/2 | 31/32 | 2.12 | .299 | 10 |
| 68RB-0806B | | 1-3/32-20 | 3/8 | 1-1/8 | 1.96 | .397 | 5 |
| 68RB-0808B | 1/2 | 1-3/32-20 | 1/2 | 1-1/8 | 2.15 | .397 | 5 |

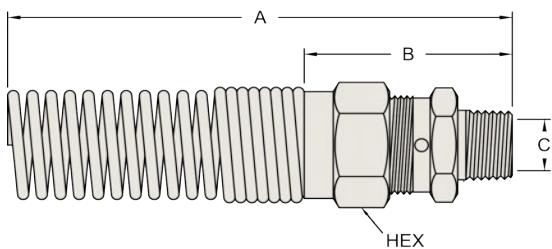**68RBSG***Male Connector With Spring Guard*

| Part Number | Hose Size | Pipe Thread | Hex | A | B | C | Std. Pkg. |
|--------------------|-----------|-------------|--------|------|------|------|-----------|
| 68RBSG-0604 | | 1/4 | 1-1/16 | 4.69 | 1.96 | .299 | 2 |
| 68RBSG-0606 | 3/8 | 3/8 | 1-1/16 | 4.8 | 2.05 | .299 | 2 |
| 68RBSG-0608 | | 1/2 | 1-1/16 | 4.9 | 2.15 | .299 | 2 |
| 68RBSG-0806 | | 3/8 | 1-1/4 | 5.0 | 2.00 | .397 | 2 |
| 68RBSG-0808 | 1/2 | 1/2 | 1-1/4 | 5.25 | 2.25 | .397 | 2 |

Application:

- For use where "Lead Free" fittings are required

Conforms To:

- Safe Water Drinking Act (SWDA) of Jan. 4, 2014
- California AB1953
- RoHS Compliant

102 Series*Male Hose Barb - NPT*

| Part Number | Hose ID x Male NPT Thread |
|-------------|---------------------------|
| 1020302CLF | 3/16 x 1/8 |
| 1020402CLF | 1/4 x 1/8 |
| 1020404CLF | 1/4 x 1/4 |
| 1020502CLF | 5/16 x 1/8 |
| 1020504CLF | 5/16 x 1/4 |
| 1020602CLF | 3/8 x 1/8 |
| 1020604CLF | 3/8 x 1/4 |
| 1020606CLF | 3/8 x 3/8 |
| 1020608CLF | 3/8 x 1/2 |
| 1020804CLF | 1/2 x 1/4 |
| 1020806CLF | 1/2 x 3/8 |
| 1020808CLF | 1/2 x 1/2 |
| 1021008CLF | 5/8 x 1/2 |
| 1021208CLF | 3/4 x 1/2 |
| 1021212CLF | 3/4 x 3/4 |

104 Series*Female Hose Barb - Solid - NPT*

| Part Number | Hose ID X Female NPT Thread |
|-------------|-----------------------------|
| 1040404CLF | 1/4 x 1/4 |
| 1040604CLF | 3/8 x 1/4 |
| 1040606CLF | 3/8 x 3/8 |
| 1040608CLF | 3/8 x 1/2 |
| 1040808CLF | 1/2 x 1/2 |

129 Series*90° Elbow - NPT*

| Part Number | Hose ID x Male NPT |
|-------------|--------------------|
| 1290404CLF | 1/4 x 1/4 |
| 1290604CLF | 3/8 x 1/4 |
| 1290606CLF | 3/8 x 3/8 |

143 Series*Female Swivel Hose Barb - Dual Angle Seat*

| Part Number | Hose ID x Tube OD x UNF Thread |
|-------------|--------------------------------|
| 1430407KLF | 1/4 x 1/4 x 7/16-20 |

Materials:

- Lead free brass <=0.25% lead
- Alloy CA2745
- Alloy C46400

**163 Series***Solid Hex Head Plug - NPT*

| Part Number | NPT Thread |
|-------------|------------|
| 1630200CLF | 1/8 |
| 1630400CLF | 1/4 |

**165 Series***Close Pipe Nipple - NPT*

| Part Number | NPT Thread x NPT Thread |
|-------------|-------------------------|
| 1650202CLF | 1/8 x 1/8 |
| 1650404CLF | 1/4 x 1/4 |
| 1650606CLF | 3/8 x 3/8 |
| 1650808CLF | 1/2 x 1/2 |
| 1651212CLF | 3/4 x 3/4 |

**166 Series***Long Pipe Nipple - NPT*

| Part Number | NPT Thread x OAL |
|-------------|------------------|
| 1660230CLF | 1/8 x 3" |
| 1660240CLF | 1/8 x 4" |
| 1660415CLF | 1/4 x 1 1/2" |
| 1660420CLF | 1/4 x 2" |
| 1660430CLF | 1/4 x 3" |
| 1660440CLF | 1/4 x 4" |
| 1660615CLF | 3/8 x 1 1/2" |
| 1660620CLF | 3/8 x 2" |
| 1660625CLF | 3/8 x 2 1/2" |
| 1660630CLF | 3/8 x 3" |
| 1660640CLF | 3/8 x 4" |
| 1660815CLF | 1/2 x 1 1/2" |

**178 Series***Hose Splicer*

| Part Number | Hose ID x Hose ID |
|-------------|-------------------|
| 1780404CLF | 1/4 x 1/4 |
| 1780606CLF | 3/8 x 3/8 |
| 1780808CLF | 1/2 x 1/2 |

**179 Series***Hose Barb Tee Splicer*

| Part Number | Hose ID |
|-------------------|---|
| 1790404CLF | $\frac{1}{4} \times \frac{1}{4} \times \frac{1}{4}$ |
| 1790606CLF | $\frac{3}{8} \times \frac{3}{8} \times \frac{3}{8}$ |

**272 Series***"Lok-On" Male NPT Hose Barb*

| Part Number | Hose ID x Male NPT Thread |
|-------------------|----------------------------------|
| 2720402CLF | $\frac{1}{4} \times \frac{1}{8}$ |
| 2720404CLF | $\frac{1}{4} \times \frac{1}{4}$ |
| 2720604CLF | $\frac{3}{8} \times \frac{1}{4}$ |
| 2720606CLF | $\frac{3}{8} \times \frac{3}{8}$ |
| 2720806CLF | $\frac{1}{2} \times \frac{3}{8}$ |
| 2720808CLF | $\frac{1}{2} \times \frac{1}{2}$ |

**211 Series***Square Head Plug - PTF*

| Part Number | PTF Thread |
|-----------------|---------------|
| 2110200C | $\frac{1}{8}$ |
| 2110400C | $\frac{1}{4}$ |
| 2110600C | $\frac{3}{8}$ |
| 2110800C | $\frac{1}{2}$ |
| 2111200C | $\frac{3}{4}$ |

**287 Series***"Lok-On" Female Swivel Hose Barb - Dual Angle*

| Part Number | Hose ID x Tube OD x UNF Thread |
|-------------------|---------------------------------|
| 2870407CLF | $1/4 \times 1/4 \times 7/16-20$ |

**213 Series***Pipe Cap - NPT*

| Part Number | NPT Thread |
|-------------------|---------------|
| 2130200CLF | $\frac{1}{8}$ |
| 2130400CLF | $\frac{1}{4}$ |
| 2130600CLF | $\frac{3}{8}$ |
| 2130800CLF | $\frac{1}{2}$ |
| 2131200CLF | $\frac{3}{4}$ |

**302 Series***90° Female Pipe Elbow - NPT*

| Part Number | NPT Thread |
|-------------------|---------------|
| 3020404CLF | $\frac{1}{4}$ |
| 3020606CLF | $\frac{3}{8}$ |
| 3020808CLF | $\frac{1}{2}$ |
| 3021212CLF | $\frac{3}{4}$ |

**219 Series***Hex Socket Plug - NPT*

| Part Number | NPT Thread |
|-----------------|---------------|
| 2190200C | $\frac{1}{8}$ |
| 2190400C | $\frac{1}{4}$ |
| 2190600C | $\frac{3}{8}$ |
| 2190800C | $\frac{1}{2}$ |
| 2191200C | $\frac{3}{4}$ |

**304 Series***90° Street Elbow - NPT*

| Part Number | NPT Thread |
|-------------------|----------------------------------|
| 3040202CLF | $\frac{1}{8} \times \frac{1}{8}$ |
| 3040404CLF | $\frac{1}{4} \times \frac{1}{4}$ |
| 3040606CLF | $\frac{3}{8} \times \frac{3}{8}$ |
| 3040808CLF | $\frac{1}{2} \times \frac{1}{2}$ |



322 Series
Female Pipe Tee - NPT

| Part Number | NPT Thread |
|-------------|---------------|
| 3220202CLF | $\frac{1}{8}$ |
| 3220404CLF | $\frac{1}{4}$ |
| 3220606CLF | $\frac{3}{8}$ |
| 3220808CLF | $\frac{1}{2}$ |
| 3221212CLF | $\frac{3}{4}$ |



324 Series
Male Branch Tee - NPT

| Part Number | NPT Thread |
|-------------|---------------|
| 3240606CLF | $\frac{3}{8}$ |



326 Series
Street Tee - NPT

| Part Number | NPT Thread |
|-------------|---------------|
| 3260404CLF | $\frac{1}{4}$ |



370 Series
Male Hex Nipple - NPT

| Part Number | NPT Thread |
|-------------|----------------------------------|
| 3700202CLF | $\frac{1}{8} \times \frac{1}{8}$ |
| 3700404CLF | $\frac{1}{4} \times \frac{1}{4}$ |
| 3700606CLF | $\frac{3}{8} \times \frac{3}{8}$ |
| 3700808CLF | $\frac{1}{2} \times \frac{1}{2}$ |



371 Series
Female Hex Coupling - NPT

| Part Number | Female NPT |
|-------------|----------------------------------|
| 3710202CLF | $\frac{1}{8} \times \frac{1}{8}$ |
| 3710404CLF | $\frac{1}{4} \times \frac{1}{4}$ |
| 3710606CLF | $\frac{3}{8} \times \frac{3}{8}$ |
| 3710808CLF | $\frac{1}{2} \times \frac{1}{2}$ |



373 Series
Reducer Bushing - NPT

| Part Number | Male NPT x Female NPT Thread |
|-------------|----------------------------------|
| 3730402CLF | $\frac{1}{4} \times \frac{1}{8}$ |
| 3730604CLF | $\frac{3}{8} \times \frac{1}{4}$ |
| 3730804CLF | $\frac{1}{2} \times \frac{1}{4}$ |
| 3730806CLF | $\frac{1}{2} \times \frac{3}{8}$ |
| 3731208CLF | $\frac{3}{4} \times \frac{1}{2}$ |



375 Series
Adapter - NPT

| Part Number | Female NPT x Male NPT |
|-------------|----------------------------------|
| 3750402CLF | $\frac{1}{4} \times \frac{1}{8}$ |
| 3750404CLF | $\frac{1}{4} \times \frac{1}{4}$ |
| 3750604CLF | $\frac{3}{8} \times \frac{1}{4}$ |
| 3750808CLF | $\frac{1}{2} \times \frac{1}{2}$ |
| 3751212CLF | $\frac{3}{4} \times \frac{3}{4}$ |



377 Series
Reducer Coupler - NPT

| Part Number | Female NPT x Female NPT |
|-------------|----------------------------------|
| 3770806CLF | $\frac{1}{2} \times \frac{3}{8}$ |
| 3771208CLF | $\frac{3}{4} \times \frac{1}{2}$ |

**502 Series***Female Hose x Female Pipe NPT Swivel*

| Part Number | GH Thread x NPT Thread |
|-------------|----------------------------------|
| 5021208CLF | $\frac{3}{4} \times \frac{1}{2}$ |
| 5021212CLF | $\frac{3}{4} \times \frac{3}{4}$ |

**509 Series***Male Hose x Male Hose x Female Pipe*

| Part Number | Male GH x Male GH x Female NPT |
|-------------|---|
| 5091212CLF | $\frac{3}{4} \times \frac{3}{4} \times \frac{1}{2}$ |

**506 Series***Female Hose x Female Hose Swivel*

| Part Number | Female GH x Female GH |
|-------------|----------------------------------|
| 5061212CLF | $\frac{3}{4} \times \frac{3}{4}$ |

**514 Series***Male Hose x Male Pipe x Female Pipe*

| Part Number | Male GH x Male NPT x Female NPT |
|-------------|---|
| 5141212CLF | $\frac{3}{4} \times \frac{3}{4} \times \frac{1}{2}$ |

**507 Series***Male Hose x Female Pipe Adapter*

| Part Number | Male GH x Female NPT |
|-------------|----------------------------------|
| 5071212CLF | $\frac{3}{4} \times \frac{3}{4}$ |

**590 Series***Male Garden Hose*

| Part Number | Hose ID x Male GH |
|-------------|----------------------------------|
| 5900812CLF | $\frac{1}{2} \times \frac{3}{4}$ |
| 5901012CLF | $\frac{5}{8} \times \frac{3}{4}$ |
| 5901212CLF | $\frac{3}{4} \times \frac{3}{4}$ |

**508 Series***Male Hose x Male Pipe Adapter*

| Part Number | Male GH x Male NPT |
|-------------|----------------------------------|
| 5081208CLF | $\frac{3}{4} \times \frac{1}{2}$ |

**591 Series***Female Garden Hose Swivel Fitting*

| Part Number | Hose ID x Female GH |
|-------------|----------------------------------|
| 5910812CLF | $\frac{1}{2} \times \frac{3}{4}$ |
| 5911012CLF | $\frac{5}{8} \times \frac{3}{4}$ |
| 5911212CLF | $\frac{3}{4} \times \frac{3}{4}$ |

Lead Free

What is the new lead-free requirement?

In 2011, the Reduction of Lead in Drinking Water Act was signed into law. The Act has reduced the lead content allowed in drinking water systems and plumbing materials by changing the definition of "Lead-Free" in Section 1417 of the Safe Drinking Water Act (SDWA). The new law went into effect January 4th 2014.

Definition of "Lead-Free"

The term "lead-free" has been updated from not more than 8% lead content to mean "not more than a weighted average of 0.25% lead when used with respect to wetted surfaces of pipes, pipe fittings, plumbing fittings and fixtures."

Lead Free Exemptions

The new requirement does not apply to pipes, pipe fittings, plumbing fittings, or fixtures, including back flow preventers, that are used exclusively for non-potable services, such as manufacturing, industrial processing, irrigation, outdoor watering, or any other uses where the water is not anticipated to be used for human consumption.

Dixon Brass Standard Brass Parts

Our brass parts are machined from Brass Alloy CDA 353, 360 or 377. The lead content is 2.5% to 3.7%. Our brass shape products are produced from Alloy C3604B with a lead content of 1.8% - 3.7%. These brass alloys do not meet the low lead requirements as stated in the Safe Drinking Water Act. Dixon Brass parts are within the acceptable level for leaded brass rod for the RoHS Directive 2001/65/EU. The exemption is Annex 6(C) for copper alloy containing up to 4% lead by weight. Dixon Brass parts are also Mercury free.

The "LF" option in the catalog

We are offering select products with a "lead free" option. These will be denoted with an "LF" behind the standard part number. The "LF" option products will be functionally the same as our brass option, but the design and dimensions may be modified. All parts with the "LF" option will have <= 0.25% lead and will meet the definition of "lead free" in Section 1417 of the Safe Water Drinking Act. Please contact Dixon if you require additional "lead free" products beyond those listed in our catalog.



Size Comparisons

Actual Outside Diameters of Pipe Threads



1/8"


1/4"



3/8"



1/2"



3/4"



1"

Actual Outside Diameters of Tubing



1/8"

3/16"

1/4"

5/16"

3/8"

1/2"

5/8"

3/4"

7/8"

1"



Male Thread Profiles



1/8"

1/4"

3/8"

1/2"

3/4"

1"

Threading Information

| Abbreviation | System Name | Compatibility | Seal Method |
|-------------------------|---|---|--|
| BSPP | British Standard Pipe Parallel | male BSPP with female BSPP female BSPP with male BSPP female BSPP with male BSPT | washer washer washer |
| BSPT_r | British Standard Pipe Taper | male BSPT _r with female BSPT _r male BSPT _r with female BSPP female BSPT _r with male BSPT _r <i>female BSPT_r not compatible with male BSPP</i> | thread washer thread |
| CHT | American Standard Fire Hose Thread (1" National Hose Thread is Chemical Hose Thread , also known as Booster Hose Thread) | 1" male NH (NST) with 1" female NH (NST) 1" female NH (NST) with 1" male NH (NST) 1" thread is used on both $\frac{3}{4}$ " hose & 1" hose | washer washer not compatible |
| GHT | Garden Hose Thread | male GHT with female GHT female GHT with male GHT thread is same for all size hose | washer washer not compatible |
| IPS | Iron Pipe Straight Thread | generic name for Straight Pipe Thread <i>see NPSH for compatibility</i> | washer |
| IPT | Iron Pipe Thread | generic name for All Pipe Thread | more information required |
| JIC | Joint Industrial Committee | used with other mating JIC threads | mechanical |
| NH or NST | American Standard Fire Hose Coupling Thread (National Hose thread also known as National Standard Thread) | male NH (NST) with female NH (NST) female NH (NST) with male NH (NST) thread pitch and diameters of fire threads may vary according to local and municipal regulations <i>not compatible with other systems</i> | washer washer |
| NPT | American Standard Taper Pipe Thread (National Pipe Tapered) | male NPT with female NPT male NPT with female NPTF male NPT with female NPSM male NPT with female NPSH female NPT with male NPT female NPT with male NPTF <i>female NPT not compatible with male NPSM or male NPSH</i> | thread thread washer washer thread thread |
| NPTF | American Standard Taper Pipe Fuel Dryseal Thread (National Pipe Tapered Dryseal) | male NPTF with female NPTF male NPTF with female NPT male NPTF with female NPSM male NPTF with female NPSH female NPTF with male NPTF female NPTF with male NPT female NPTF with male NPSM or NPSH <i>NPTF with NPTF threads do not require sealant for the initial use, after that, sealant is required</i> | thread thread washer washer thread thread not compatible |
| NPSH | American Standard Straight Pipe for Hose Couplings (National Pipe Straight Hose) | male NPSH with female NPSH female NPSH with male NPSH female NPSH with male NPT female NPSH with male NPTF female NPSH with male NPSM | washer washer washer washer washer |
| NPSM | American Standard Straight Mechanical Joints (National Pipe Straight Mechanical) | male NPSM with female NPSM male NPSM with female NPSH female NPSM with male NPSM female NPSM with male NPT female NPSM with male NPTF | Seal can be either mechanical or washer. Mating fittings must be of same type. |
| SIPT | Straight Iron Pipe Thread | generic name for Straight Pipe Thread | washer |
| TIPT | Tapered Iron Pipe Thread | generic name for Tapered Pipe Thread | thread |
| NYC | NYC Fire Department | straight thread used in New York City | washer |
| Chicago | Chicago Fire Department | straight thread used in Chicago | washer |

Limited Warranty

DIXON VALVE AND COUPLING COMPANY (herein called "Dixon") warrants the products described herein, and manufactured by Dixon to be free from defects in material and workmanship for a period of one (1) year from date of shipment by Dixon under normal use and service. It's sole obligation under this warranty being limited to repairing or replacing, as hereinafter provided, at its option any product found to Dixon's satisfaction to be defective upon examination by it, provided that such product shall be returned for inspection to Dixon's factory within three (3) months after discovery of the defect. The repair or replacement of defective products will be made without charge for parts or labor. This warranty shall not apply to: (a) parts or products not manufactured by Dixon, the warranty of such items being limited to the actual warranty extended to Dixon by its supplier; (b) any product that has been subject to abuse, negligence, accident, or misapplication; (c) any product altered or repaired by others than Dixon; and (d) to normal maintenance services and the replacement of service items (such as washers, gaskets and lubricants) made in connection with such services. To the extent permitted by law, this limited warranty shall extend only to the buyer and any other person reasonably expected to use or consume the goods who is injured in person by any breach of the warranty. No action may be brought against Dixon for an alleged breach of warranty unless such action is instituted within one (1) year from the date the cause of action accrues. This limited warranty shall be construed and enforced to the fullest extent allowable by applicable law.

Other than the obligation of Dixon set forth herein, Dixon disclaims all warranties, express or implied, including but not limited to any implied warranties of merchantability or fitness for a particular purpose, and any other obligation or liability. The foregoing constitutes Dixon's sole obligation with respect to damages, whether direct, incidental or consequential, resulting from the use or performance of the product.

Some products and sizes may be discontinued when stock is depleted, or may require a minimum quantity for ordering.

Limits of Liability

This catalog is intended as a product offering. It is not intended to be a user or technical manual. Information in this catalog is subject to change without notice. All users and distributors of products sold through this catalog should contact Dixon™ with questions of use, compatibilities, coupling procedures and life of product. Our full-time engineering and test staff is always available to recommend uses and to assist distributors and users with any questions.



Safety



Safety logos, which appear throughout our catalog, are used as a reminder that the user should carefully review for the appropriateness of the product for the media, application and environment in which it will be used.

NOTE: Because of the health hazards associated with contamination and lead content in drinking water systems, Dixon™ couplings, unless otherwise specifically approved, are not recommended for potable water service and should not be used in applications where drinking water will contact the wetted surfaces of the coupling.

Warning: Dixon™ products may contain chemicals known to the State of California to cause cancer, birth defects, or other reproduction harm.

Copyright

Copyright © 2016 by Dixon Valve and Coupling

All rights reserved. This book is copyrighted material. Use, reproduction or copying of it by anyone other than Dixon™ is strictly forbidden without its express written consent.

United States

Albany, NY
ph 518.725.0998
178A Corporate Drive
Gloversville, NY 12078
fx 518.725.8542

Atlanta, GA
ph 770.486.9619
101 T.D.K. Boulevard
Suite A
Peachtree City, GA 30269
fx 770.486.9813

Dallas, NC
ph 704.376.5755
2925 Chief Court
Dallas, NC 28034
fx 704.376.1557

Chestertown, MD
ph 800.355.1991
800 High Street
Chestertown, MD 21620
fx 800.283.4966

Chicago, IL
ph 630.323.3716
1011 N. Hilltop Drive
Itasca, IL 60143
fx 630.323.4120

Cleveland, OH
ph 330.425.3000
1900 Enterprise Parkway
Twinsburg, OH 44087
fx 330.425.1527

Houston, TX
ph 713.678.4291
6525 Homestead Road
Houston, TX 77028
fx 713.678.8105

Kansas City, MO
ph 816.221.0064
1244 Saline Street
N. Kansas City, MO 64116
fx 816.221.1108

Los Angeles, CA
ph 909.605.6400
8840 Flower Road
Suites150/160
Rancho Cucamonga, CA 91730
fx 909.605.6200

Portland, OR
ph 503.289.0400
2642 North Marine Drive
Portland, OR 97217
fx 503.289.0600

Salt Lake City, UT
ph 801.972.1180
McGillis Ind. Pk. Bldg., #4
1972 South 4370 West
Salt Lake City, UT 84104
fx 801.972.8063

Tampa, FL
ph 813.247.3500
5120 Adamo Drive
Suite E
Tampa, FL 33619
fx 813.247.7910

International

**Edmonton, Alberta,
Canada**
ph 780.469.5444
fx 780.463.9205

**Innisfil, Ontario,
Canada**
ph 705.436.1125
fx 705.436.6251

**Montreal, Quebec,
Canada**
ph 514.422.9292
fx 514.422.0166

**Wingfield SA,
Australia**
ph 61.8.8202.6000
fx 61.8.8202.6099

Preston, England
ph 44.1.77.232-3529
fx 44.1.77.231.4664

**Troisdorf-Spich,
Germany**
ph 49.2241.84406.0
ph 49.2241.8440679

Monterrey, Mexico
ph 52.81.8354.5649
fx 52.81.8354.8197



The Right Connection®

Dixon Brass
40 Chestnut Avenue
Westmont, IL 60559-1128
ph 800.323.4440 local 630.323.4442
fx 800.628.7259 local 630.323.4317
brasssales@dixonvalve.com

dixonvalve.com



customer service

