


Air grinders

Straight grinders

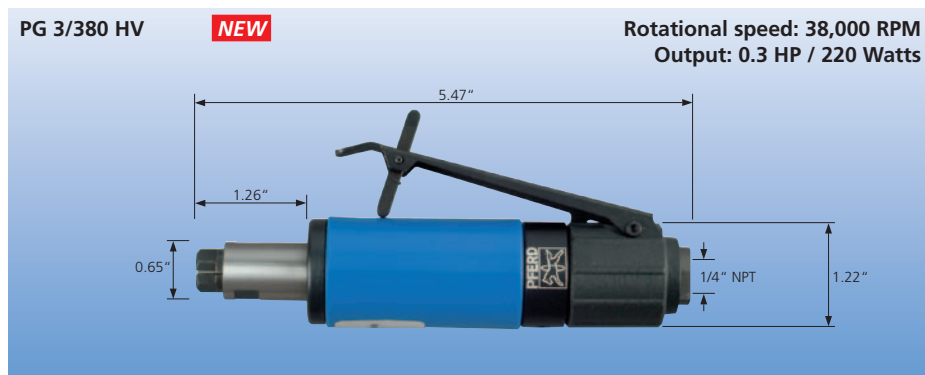

Tool features

- P** Pneumatic
- G** Straight grinder
- 3** 0.3 HP output (220 Watts)
- 380** 38,000 RPM rotational speed
- HV** Safety lever throttle

Tool benefits

- Compact design, convenient in use.
- Easy to handle, and to guide.
- Low vibration, protecting people, tools and machine.

Accessories included

- 2 keys
- 1/4" collet 93074 (collet group 6)
- 1/4" NPT female threaded connection



Use only with oil.
2 drops per minute
In-line filter 95514 recommended

PFERDERGONOMICS®



PFERDMEDIA

To see it in action, please visit
pferdusa.com/90018

EDP number	Model number	Air consumption [cfm]	Exhaust direction	Throttle type	Sound level [dB(A)]	Air supply hose inner dia. [inches]	Weight [lb]
90018	PG 3/380 HV	12	front	lever	78	3/8	0.68

Collets

	Group 6	For shank diameter					
		3/32 Inch	1/8 Inch	1/4 Inch	3 mm	6 mm	8 mm
	EDP number	93067	93072	93074	93057	93062	93064

For collet details, see table on page 66.

Keys

	Width	Qty	EDP number
	11 mm	1	93335
	14 mm	1	93340

Recommended PFERD products

Catalogue 202	Catalogue 204*
Tungsten carbide burs 3/16" to 1/4" diameter 	Abrasive spiral bands 3/8" to 5/8" diameter
Mounted points 1/2" to 1" diameter 	POLICAP® abrasive caps 1/4", 9/32" diameter
	Mounted flap wheels 3/8" diameter 1/8" shank diameter
	Poliflex® fine grinding points Bond GR 1/4" diameter Bond LR 1/2" diameter

Note: Product recommendations are based on general peripheral and rotational speeds.

Where no shank diameter is indicated, the shank diameter specification is 1/4".

Please consult the appropriate catalogue section for technical information on specific recommended speeds based on application, abrasive grain, product size/shape, and workpiece material.

*Shank-mounted product recommendations are based on 1/2" shank overhang.

Comply with ANSI B7.1-2000 standards and OSHA regulations.