

Reel Catalog

Hose, cord and cable reels



reelcraft.com

 **REELCRAFT**®



Why use hose reels?

Why use hose reels? Because they make hose handling more efficient and safer. Your hoses, cables and cords will last up to five times longer. You will improve hose management, which decreases labor costs. Your chances of injuries from tripping


hazards will decrease, which saves lost work time, medical bills and higher insurance. You also save the expense and time to replace expensive hoses, cables and cords that get run over by fork lifts and other vehicles.

Five reasons why hose reels add value



Improve efficiency

Hoses, cable and cords are where you want/need them.



Increase safety

Reduce tripping accidents and lost work time.



Minimize leakages

Reduce costs of air and water leakages.



Reduce hose wear

Hose and cord on reels can last up to five times longer.



Increase productivity

No more tangled hoses improves efficiency.



Series 9000 - Photo courtesy of Neal Asphalt Sealcoating Equipment



Series 30000 - Photo courtesy of 1st Attack Engineering



Truck courtesy of E&B Paving, Anderson IN

OSHA says reduce your trips and falls

"There are many situations that may cause slips, trips and falls. The controls needed to prevent these hazards are usually obvious, but too often ignored, such as... coiling up extension cords, lines and hoses when not in use and keeping electrical and

other wires out of the way." OSHA's "Fall Prevention Tips" include, "Practice good housekeeping. Keep cords, welding leads and air hoses out of walkways or adjacent work areas."

Source: www.osha.gov

Same-day quick ship program offers fastest service

Because we are centrally located in the US and have three North American warehouses, upon request, we can quickly ship our standard products the same day for domestic orders of ten or fewer standard models. Orders must be received by 11:30 am Eastern Time. Look for the shipping icons in this catalog for designated models. For the most current list of Quick Ship reels, please visit www.reelcraft.com.



Two Year Limited Warranty and Return Policy

Reelcraft now offers a two-year limited warranty. All reels manufactured by Reelcraft Industries, Inc. are warranted to be free of defects due to faulty material or workmanship for 24 months from date of shipment. Exception: LD, LG, LH cord reels - 1 year; hose and light bulbs - 6 months. Normal wear and tear is not considered a defect in material or workmanship. For complete warranty information, online warranty registration and return information please visit www.reelcraft.com or call Reelcraft's Customer Service Department toll-free at 1-855-634-9109.

***Please refer to the online catalog for the most current and up-to-date product information.**




Reelcraft: Better by Design

Reelcraft's reels are better by design because of our lasting commitment to excellence. Our engineering team is well known for designing durable, high quality products. Our standard

features include durable, corrosion-resistant powder coat paint, multi-position guide arms for versatile mounting options and heavy-duty, reinforced steel stampings for

increased strength. Our reels are permanently factory-lubricated for a long, trouble-free service life. All of these features, and many more, add up to make "The Reelcraft Difference."

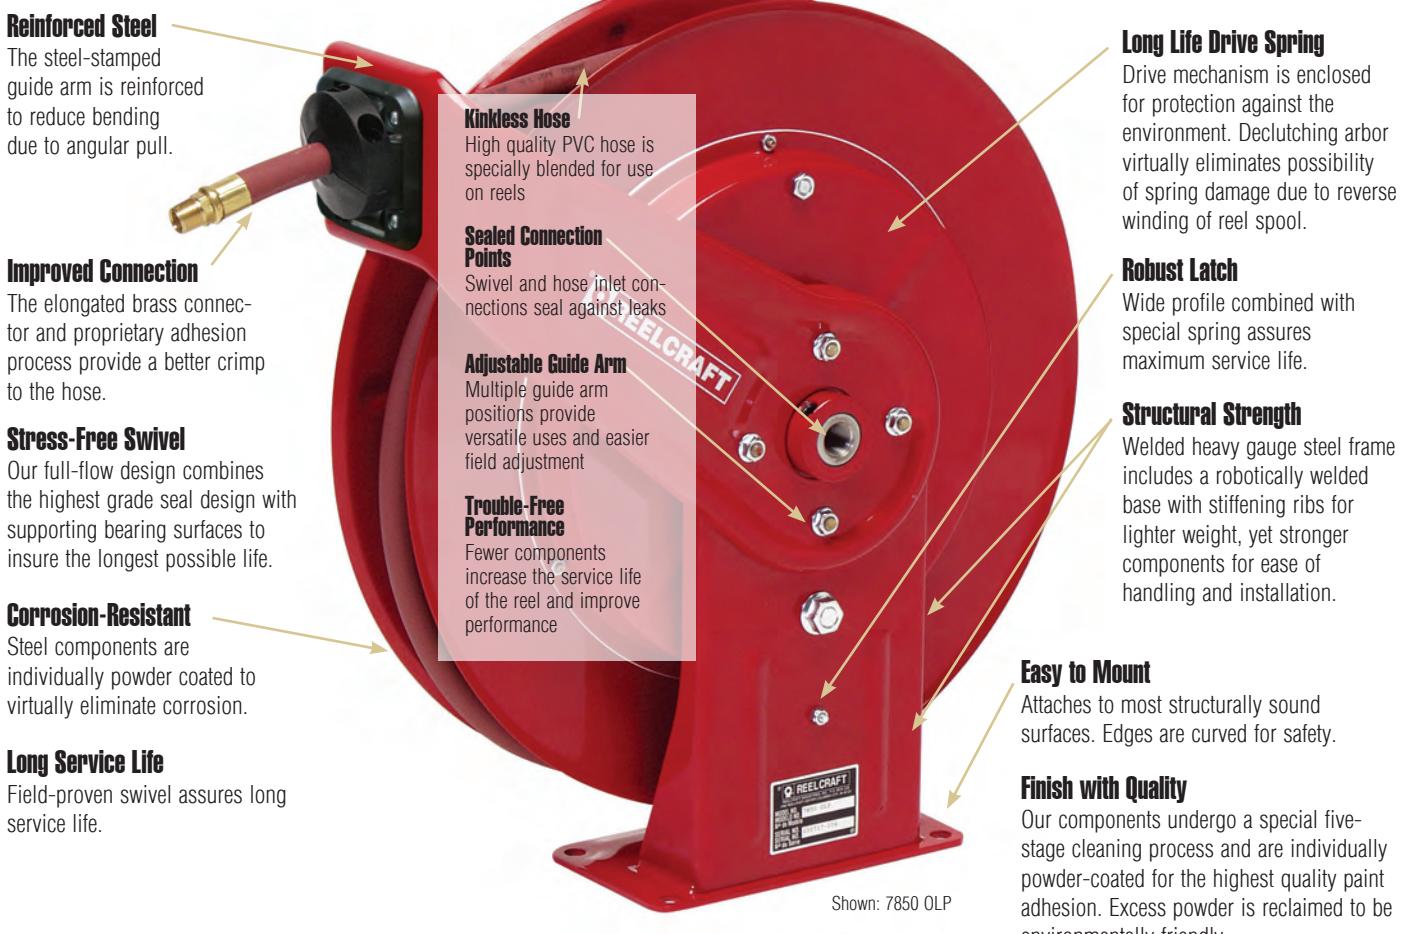

To place an order, please advise:

1. Model number.
2. Product to be handled such as air, oil, water, etc.
3. Maximum operating pressure in P.S.I.
4. Maximum operating temperature in degrees Fahrenheit.
5. Hose inside and outside diameters and length.
6. Installation height, especially if more than 16 feet.
7. Desired guide arm position by adding one of the suffixes to the model number. Example: 5635 OLPSW for side wind.

COPYRIGHT NOTICE

All rights reserved. No part of the material protected by this copyright may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying, recording, broadcasting or by any other information storage and retrieval

system without written permission from Reelcraft Industries, Inc. Reelcraft, Work Smarter, Nordic, Hose Boss, Safe-T-Reel, Better by Design, Built Better to Perform Better and Rely on Reelcraft are the trademarks and service marks of Reelcraft Industries, Inc. registered in the United States and/or other jurisdictions. You shall

Additional Considerations:

A flexible connection between the reel and the source of supply is required to prevent possible misalignment and binding. Non-flexible connections will void the warranty. The pressure rating of inlet hose must be equal to or greater than the rating of the reel.

Accessories


Reels ordered with hose and bumper are assembled complete and ready to install. Order bumpers separately for reels without hoses.

Additional questions? Please visit our website or call for assistance. For more than 40 years, our specialty is offering hose handling solutions.

not display, disparage, dilute or taint our trademarks and service marks, or use our marks in such a way that would misrepresent the identity of the owner.

All other trademarks, service marks or registered trademarks appearing on these pages are the trademarks or service marks of their respective owners. Super Swivel, Full Circle swivel, Viton, Quiet Speed, Buna, Push Lok, Stubby and Stubby II are not owned by Reelcraft Industries, Inc.

Table of Contents

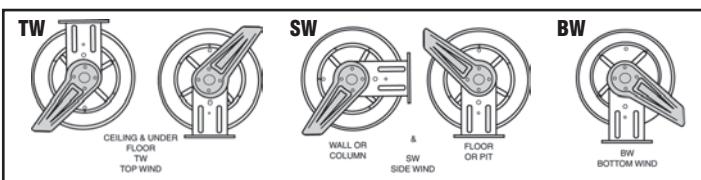Reel Series	Page	Reel Series	Page
			
Series RT 1/4", 3/8", 1/2" I.D.	8	Fuel & Grounding Reels 3/4", 1", 1 1/4", 1 1/2" I.D.	18
			
Series 4000, 5000 & 5005 1/4", 3/8", 1/2" I.D.	9	Stainless Steel Reels 1/4", 3/8", 1/2", 3/4", 1" I.D.	19
			
Series 7000 1/4", 3/8", 1/2", 3/4" I.D.	10	Pre-Rinse, Potable Water Reels 3/8", 1/2" I.D.	20
			
Series DP5000 & DP7000 1/4", 3/8", 1/2" I.D.	11	Series S 1/4", 3/8", 1/2", 5/8" I.D.	21
			
Series D8000 & E8000 1/4", 3/8", 1/2" I.D.	12	Pressure Wash Reels 1/4", 3/8", 1/2" I.D.	22
			
Series 80000 & D80000 3/8", 1/2", 3/4", 1" I.D.	13	Series CU, CT & CM 3/8", 1/2" I.D.	23
			
Series SD10000 3/4", 1" I.D.	14	Series H 3/8", 1/2", 3/4" I.D.	24
			
Series 9000 1/2", 3/4", 1", 1 1/4", 1 1/2" I.D.	15	Series 30000 1/2", 3/4", 1" I.D.	24-26
			
Series 3100 & 4800 1/2", 3/4", 1", 1 1/4", 1 1/2" I.D.	16	Guide Arm Positions and Suffix Codes	
		The suffix codes (as indicated at right) must be added after the model number to specify desired guide arm position. For example, 5635 OLPSW designates side wind guide arm position. NOTE: Series 9000 reels are shipped in the BW position and Series 80000 is shipped in the SW position. All other series reels are shipped in the TW position unless otherwise specified.	
Series TH 1/4", 3/8", 1/2" I.D.	17	Series 4000 and 5000 reels ordered in the BW position are available in constant tension only.	

Custom Built Reels

Custom Built Reels

Reelcraft's engineered products group custom builds reels to your specifications. Our special engineered products are developed for demanding applications in areas such as marine, military, aviation, hydroseeding, sewer and well cleaning, offshore oil rigs, robotic cable and much

more. We offer flexibility, competitive pricing and a lasting commitment to excellence. For more than 25 years, Reelcraft's engineered products group has produced custom products to meet individualized requirements.



Reelcraft's Capabilities

Very few size and weight constraints

We build to meet most extreme size and weight constraints.

Special finishes/paint options

Options include CARC paint, marine grade epoxy, stainless steel, liquid enamel coat paint and powder coat paint in any color.

Various drive types

Manual crank, motorized, spring driven, hand-over-hand and more.

Wide range of pressures

A wide variety of pressure ranges available from 50 to 10,000.

Unique options

Hose Boss rewind assist, tensioning bars, multiple fluid paths, level rewinds and much more.

No minimum quantities

Order from 1 to as many as you need.



Reelcraft's product quality starts with modern engineering techniques for maximum strength through better design, better materials and tested and proven products. We are committed to superior manufacturing processes by producing our steel components from hard tooling (dies) that increase product strength and reliability compared with simply bending metal in press breaks. In addition, we offer more levels of industrial products: Good, Better, Best and Ultimate. Our customers report that superior value is why they choose Reelcraft reels. All of these qualities and more add up to make "The Reelcraft Difference."

Special Powder Coat Paint Colors

Special Powder Coat Paint Colors

Customize your reel color with special paint options

Reelcraft is most well-known for its bright red reels, but we also paint secondary colors and special order colors. Reelcraft uses a rigorous cleaning process on raw parts prior to paint. After this process is complete, parts are then coated with a high quality, durable polyester powder coat paint for a uniform, corrosion resistant finish that will last through years of service.



RT625-OLP-40BL



RT625-OLP-42YE



RT650-OLP-35BK



RT850-OLP

Primary Colors - NO CHARGE

Reelcraft is most well-known for its bright red reels, but we also paint gray on large frame reels at no extra charge. Gray must be specified at time of order.

Large Frame Reels

Reelcraft
Red
RAL 3001

Gray
39GY
RAL 7038

Small Frame Reels

Reelcraft
Red
RAL 3001

Secondary Colors

Reelcraft frequently paints secondary colors. There is no set-up charge for secondary colors, only a variable per unit charge and a possible increase in lead time.

Large Frame Reels

White
17WH
RAL 9003

Black
35BK
RAL 9004

Blue
40BL
RAL 5005

Silver
37SR
RAL 9007

Small Frame Reels

White
17WH
RAL 9003

Black
35BK
RAL 9004

Blue
40BL
RAL 5005

Gray
39GY
RAL 7038

Special Order Colors

We thoroughly clean our booths/tools prior to painting special order colors and thus require a set-up charge in addition to the variable per unit charge. We will gladly paint any color of your choosing. Paint sample match is available. Be aware that special paint may add to lead time.

Large Frame Reels

Gray Primer 26GY	Sunshine Yellow 42YE RAL 1023	Bronze 47BZ
Hunter Green 45GN RAL 6005	Yellow (G) 46YE RAL 1005	Forrest Green 48GN RAL 6008
High Gloss Black 43BK RAL 9005	Burgundy 12BG RAL 3003	Green 20GN

Small Frame Reels


Silver 37SR RAL 9007	Gray Primer 26GY	Sunshine Yellow 42YE RAL 1023	Bronze 47BZ
High Gloss Black 43BK RAL 9005	Hunter Green 45GN RAL 6005	Yellow (G) 46YE RAL 1005	Forrest Green 48GN RAL 6008
Burgundy 12BG RAL 3003			Green 20GN

Lightweight, Economical Reels | Series RT



Made
in USA

RT650-OLP
Patent No. 7,150,425

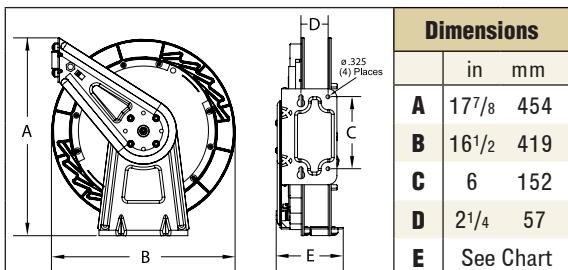

Medium Duty Spring Retractable Reels Air/Water/Oil/Grease - 1/4", 3/8", 1/2" I.D.

Series RT is an economical choice for a medium duty, light weight, spring-driven hose reel for applications that are less demanding, yet require a product that can withstand industrial and commercial use. The industrial-grade drive spring is protected from the environment in a polypropylene spool for longer service life. Guide arm adjusts to seven positions.



Nitrogen
Reels
RT650-OLPG-20GN

Model with Hose	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	**Max Pressure		(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Model without hose or bumper	Shipping Weight	Pressure	E
					in	mm						
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) **Maximum working pressure at 70 °F (20 °C)												
RT425-OLP	19 9	1/4 6	.475 12	25 8	300	21	1/4	3/8	RT402-OLP	19 9	300	21
RT435-OLP	21 10	1/4 6	.475 12	35 11	300	21	1/4	3/8	RT403-OLP	19 9	300	21
RT450-OLP	24 11	1/4 6	.475 12	50 15	300	21	1/4	3/8	RT405-OLP	21 10	300	21
RT465-OLP	25 11	1/4 6	.475 12	65 20	300	21	1/4	3/8	RT406-OLP	21 10	300	21
RT625-OLP	20 9	3/8 10	.600 15	25 8	300	21	1/4	3/8	RT602-OLP	19 9	300	21
RT635-OLP	21 10	3/8 10	.600 15	35 11	300	21	1/4	3/8	RT603-OLP	19 9	300	21
RT650-OLP	27 12	3/8 10	.600 15	50 15	300	21	1/4	1/2	RT605-OLP	22 10	300	21
RT825-OLP	26 12	1/2 13	.750 19	25 8	300	21	1/2	1/2	RT802-OLP	23 10	300	21
RT835-OLP	27 12	1/2 13	.750 19	35 11	300	21	1/2	1/2	RT803-OLP	23 10	300	21
RT850-OLP	37 17	1/2 13	.750 19	50 15	300	21	1/2	1/2	RT805-OLP	25 11	300	21
Medium Pressure Oil Reels Maximum Temperature 150 °F (65 °C)												
RT625-OMP	27 12	3/8 10	.710 18	25 8	1000	69	3/8	3/8	RT602-OMP	22 10	1000	69
RT635-OMP	30 14	3/8 10	.710 18	35 11	1000	69	3/8	3/8	RT603-OMP	22 10	1000	69
RT650-OMP	35 16	3/8 10	.710 18	50 15	1000	69	3/8	1/2	RT605-OMP	25 11	1000	69
RT825-OMP	31 14	1/2 13	.820 21	25 8	1000	69	1/2	1/2	RT802-OMP	23 10	1000	69
RT835-OMP	32 15	1/2 13	.820 21	35 11	1000	69	1/2	1/2	RT803-OMP	23 10	1000	69
High Pressure Grease Reels Maximum Temperature 150 °F (65 °C)												
RT425-OHP	28 13	1/4 6	.580 15	25 8	5000	345	1/4	3/8	RT402-OHP	22 10	5000	345
RT435-OHP	30 14	1/4 6	.580 15	35 11	5000	345	1/4	3/8	RT403-OHP	22 10	5000	345
RT625-OHP	30 14	3/8 10	.730 19	25 8	4800	331	3/8	3/8	RT602-OHP	22 10	5000	345
RT635-OHP	34 15	3/8 10	.730 19	35 11	4800	331	3/8	1/2	RT603-OHP	22 10	5000	345
RT650-OHP	46 21	3/8 10	.730 19	50 15	4800	331	3/8	1/2	RT605-OHP	25 11	5000	345

Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100 R1T one wire braid hose or equivalent. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose. Reference page 4 for guide arm positions.

Available Options

Mounting Brackets
See page 47



Inlet Hose Assemblies
See page 49



Replacement Bumpers
See page 49



Replacement Hoses
See page 50



Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

Indiana & California Warehouses

California Warehouse

Canadian Warehouse

Compact, Versatile Reels | Series 4000 / 5000 / 5005

Premium Duty Spring Retractable Reels

Air/Water/Oil/Grease - 1/4", 3/8", 1/2" I.D.

Series 4000, 5000 and 5005 reels are all-steel construction and compact for a wide range of applications with critical space requirements. A full flow shaft and swivel assures maximum product delivery. Guide arm adjusts to two positions.



Enclosed Reels
5435 ELP



Air Vend Reels
AV4425 OLPBWR

Made in USA




4625 OLP

5635 OLP

5650 OLP

Dimensions - Size Index									
	1	2	3	4					
	in	mm	in	mm	in	mm	in	mm	in
A	12 ⁷ / ₈	327	14 ³ / ₈	365	17 ⁵ / ₈	448	17 ⁵ / ₈	448	
B	12 ³ / ₈	314	14	356	16 ¹ / ₂	419	16 ¹ / ₂	419	
C	8	203	9 ³ / ₄	248	9 ³ / ₄	248	9 ³ / ₄	248	
D	2 ¹ / ₂	64							
E	5 ⁵ / ₈	143	6 ¹ / ₈	156	5 ⁷ / ₈	149	7 ¹ / ₄	184	

NOTE: See operating instructions for optimum mounting configuration.

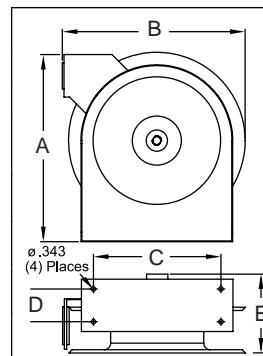

Quiet latch with Hose	Ratchet latch with Hose	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	**Max Pressure	(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Quiet latch without hose or bumper	Shipping Weight	Pressure	Size Index #
		lbs kg	in mm	in mm	ft m	psi bar	in	in		lbs kg	psi bar	
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) **Maximum working pressure at 70 °F (20 °C)												
4420 OLP	-----	18 8	1/4 6	.475 12	20 6	300 21	1/4	3/8	4400 OLP	17 8	500 35	1
4425 OLP	B4425 OLP	19 9	1/4 6	.475 12	25 8	300 21	1/4	3/8	4400 OLP	17 8	500 35	1
4435 OLP	B4435 OLP	19 9	1/4 6	.475 12	35 11	300 21	1/4	3/8	4400 OLP	17 8	500 35	1
5450 OLP	B5450 OLP	26 12	1/4 6	.475 12	50 15	300 21	1/4	3/8	5400 OLP	20 9	500 35	2
4617 OLP	-----	19 9	3/8 10	.600 15	17 5	300 21	1/4	3/8	4600 OLP	17 8	500 35	1
4625 OLP	B4625 OLP	20 9	3/8 10	.600 15	25 8	300 21	1/4	3/8	4600 OLP	17 8	500 35	1
5635 OLP	B5635 OLP	25 11	3/8 10	.600 15	35 11	300 21	1/4	3/8	5600 OLP	21 10	500 35	2
5650 OLP	B5650 OLP	36 16	3/8 10	.600 15	50 15	300 21	1/4	3/8	5605 OLP	31 14	500 35	3
A5825 OLP	B5825 OLP	27 12	1/2 13	.750 19	25 8	300 21	1/2	3/8	A5800 OLP	22 10	500 35	2
A5835 OLP	B5835 OLP	39 18	1/2 13	.750 19	35 11	300 21	1/2	3/8	A5805 OLP	32 15	500 35	3
A5850 OLP	B5850 OLP	41 19	1/2 13	.750 19	50 15	300 21	1/2	3/8	A5806 OLP	35 16	500 35	4
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)												
5435 OMP	B5435 OMP	31 14	1/4 6	.530 13	35 11	2750 190	1/4	3/8	5400 OMP	23 10	3000 207	2
5630 OMP	B5630 OMP	31 14	3/8 10	.690 18	30 9	2600 179	3/8	3/8	5600 OMP	24 11	3000 207	2
A5825 OMP*	B5825 OMP*	34 15	1/2 13	.820 21	25 8	3250 224	1/2	3/8	A5800 OMP	24 11	3250 224	2
A5835 OMP	B5835 OMP	42 19	1/2 13	.820 21	35 11	3250 224	1/2	3/8	A5805 OMP	32 15	3250 224	3
High Pressure Grease Reels Maximum Temperature 210 °F (99 °C)												
5430 OHP	-----	30 14	1/4 6	.580 15	30 9	5000 345	1/4	1/4	5400 OHP	23 10	5000 345	2
5435 OHP	B5435 OHP	39 18	1/4 6	.580 15	35 11	5000 345	1/4	1/4	5405 OHP	33 15	5000 345	3
5625 OHP	B5625 OHP	32 15	3/8 10	.730 19	25 8	4800 331	1/4	1/4	5600 OHP	26 12	5000 345	2

*Floor tank mount only - do not mount on ceiling. Low pressure reels furnished standard with PVC hose. Compressed air hoses should not be converted to oxygen service - may cause explosion when O₂ mixes with fuel. Medium pressure reels furnished standard with S.A.E. 100 R1T one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose. Reference page 4 for guide arm positions.

Available Options

Mounting Brackets
See page 47



Inlet Hose Assemblies
See page 49



Replacement Bumpers
See page 49



Replacement Hoses
See page 50



Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

Indiana & California Warehouses

California Warehouse

Canadian Warehouse

Customer Service: 1.855.634.9109
All Other Calls: 1.800.444.3134

 **REELCRAFT**®

Heavy Duty Hose Reels | Series 7000

Dimensions				
	7000 O	7000 E		
	in	mm	in	mm
A	20 ¹ / ₄	514	20 ⁷ / ₈	530
B	19 ³ / ₄	502	21 ¹ / ₈	537
C	7 ¹³ / ₁₆	198	7 ¹³ / ₁₆	198
D	3 ⁷ / ₈	98	3 ⁷ / ₈	98
E	7	178	7 ⁵ / ₈	194

Made
in USA

7850 OLP



Heavy Duty Spring Retractable Hose Reels

Air/Water/Oil/Grease - 1/4", 3/8", 1/2", 3/4" I.D.

Series 7000 is very robust and ideal for the most demanding applications. The reel's base and guide arm are formed from high-grade steel and engineered with structural forms and gussets to yield the greatest amount of strength. The standard low pressure hose is for air or water service only. The basic reel without hose can be used for air, water or oil. Consult Reelcraft for other products and hoses. Guide arm adjusts to 3 positions.

Applications

- Industrial
- Automotive service centers
- Transmission shops
- Fleet maintenance facilities
- Pneumatic tools
- Aircraft maintenance
- Tire stores
- Agriculture
- Service trucks
- Wash down

For all metric thread connections over 1/2" add the suffix number 70 to indicate BSPT threads - example 7900 OLP70.

Enclosed Reels
7650 ELP



Series 7000 E reels are the same as 7000 O reels except **E Series reels are fully enclosed**. To order, change the model number suffix letter O to E. Example, 7650 OHP becomes 7650 EHP. Add 17 lbs. to open reel weight.

Model with Hose	Shipping Weight	Hose I.D.		Hose O.D.		Hose Length		**Max Pressure	(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Model without hose & bumper	Shipping Weight	Pressure
		lbs	kg	in	mm	in	mm						
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) **Maximum working pressure at 70 °F (20 °C)													
7650 OLP	43	20	3/8	10	.600	15	50	15	300	21	1/4	7600 OLP	40 18 500 35
7670 OLP	47	21	3/8	10	.600	15	70	22	300	21	1/4	7607 OLP	40 18 500 35
7850 OLP	47	21	1/2	13	.750	19	50	15	300	21	3/8	7800 OLP	41 19 500 35
7850 OLP121	47	21	1/2	13	.750	19	50	15	300	21	1/2	7800 OLP	41 19 500 35
7850 OLP5W57	47	21	1/2	13	.750	19	50	15	300	21	3/4 NH	7800 OLP	41 19 500 35
7925 OLP	47	21	3/4	19	1.075	27	25	8	250	17	3/4	7900 OLP	44 20 500 35
F7925 OLP*	47	21	3/4	19	1.075	27	25	8	50	3	3/4	F7900 OLP	45 20 500 35
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)													
7650 OMP	55	25	3/8	10	.690	18	50	15	2600	179	3/8	7600 OMP	43 20 3000 207
7850 OMP	57	26	1/2	13	.820	21	50	15	3250	224	1/2	7800 OMP	43 20 3250 224
High Pressure Grease Reels Maximum Temperature 210 °F (99 °C)													
7450 OHP	55	25	1/4	6	.580	15	50	15	5000	345	1/4	7400 OHP	43 20 5000 345
7650 OHP	60	27	3/8	10	.730	19	50	15	4800	331	1/4	7600 OHP	46 21 5000 345

Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100 R1T one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose. For hydraulic or other applications please consult manufacturer. *Series F7925 OLP supplied with UL330 and UCL approved fuel grade hose with a 250 psi (17 bar) minimum burst. Reference page 4 for guide arm positions.

Available Options

Mounting Brackets
See page 47



Inlet Hose Assemblies
See page 49



Replacement Bumpers
See page 49



Replacement Hoses
See page 50



Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

Indiana & California Warehouses

California Warehouse

Canadian Warehouse

Compact, Dual Pedestal Reels | Series DP5000 / DP7000

Heavy Duty Spring Retractable Hose Reels

Air/Water/Oil/Grease - 1/4", 3/8", 1/2" I.D.


Reelcraft's new compact dual pedestal Series DP5000 and DP7000 feature an innovative, non-welded, interlocking base. Independent testing to military standards has proven the reel stand up to heavy vibration, which makes them especially strong and ideal for truck-mounted applications. Superbly engineered dual pedestal base and guide arm are structurally reinforced. All-steel construction and a baked-on powder coat finish combine to produce a rugged corrosion-resistant product suitable for a wide variety of heavy duty applications.

✓ Superior corrosion-resistance

A double adhesive gasket seals the spring case. Steel parts are powder coated to provide excellent protection against weathering.


✓ Ease of operation

The latch pawl is mounted on the guide arm to prevent latch out at full extension. The high impact, nylon-filled guide rollers make retraction and pay out nearly effortless.

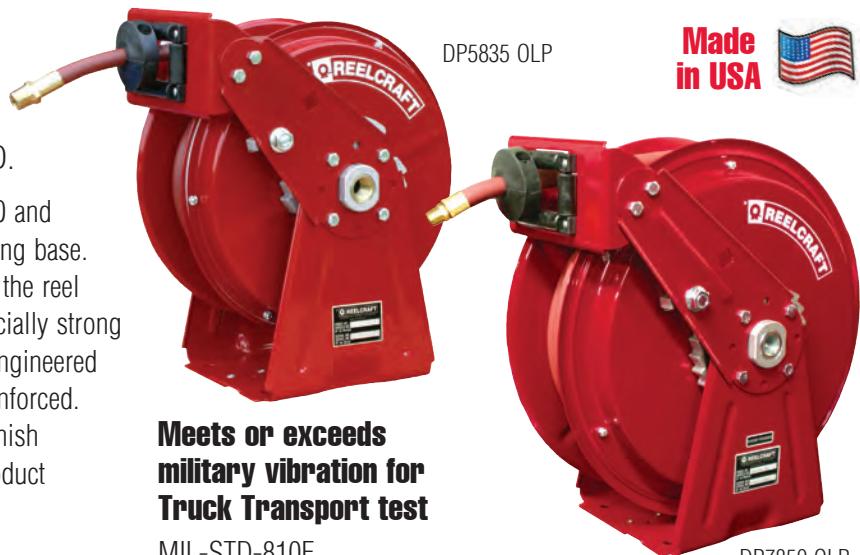

Meets or exceeds
military vibration for
Truck Transport test

MIL-STD-810F
500,000 mile equivalent

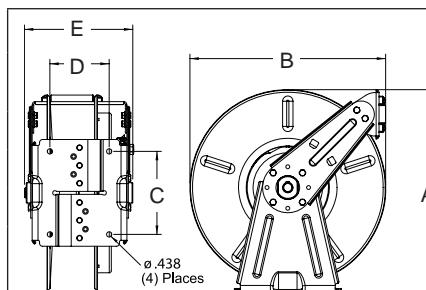

Dimensions - Size Index

	1 in mm	2 in mm	3 in mm	4 in mm
A	16 ³ / ₈ 416	16 ³ / ₈ 416	17 432	17 432
B	14 ³ / ₈ 365	14 ³ / ₈ 365	16 ¹ / ₂ 419	16 ¹ / ₂ 419
C	7 178	7 178	7 178	7 178
D	4 102	5 127	4 102	5 127
E	8 203	9 229	8 203	9 229

Model with Hose	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	**Max Pressure	(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Model without hose & bumper	Shipping Weight	Pressure	Size Index
	lbs kg	in mm	in mm	ft m	psi bar	in	in	lbs kg	psi bar	#	
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) w/hose / 210 °F (99 °C) w/o hose											**Maximum working pressure at 70 °F (20 °C)
DP5435 OLP	34 15	1/4 6	.475 12	35 11	300 21	1/4	1/2	DP5400 OLP	29 13	500 35	1
DP5450 OLP	37 17	1/4 6	.475 12	50 15	300 21	1/4	1/2	DP5400 OLP	29 13	500 35	1
DP7450 OLP	46 21	1/4 6	.475 12	50 15	300 21	1/4	1/2	DP7400 OLP	44 20	500 35	3
DP5635 OLP	41 19	3/8 10	.600 15	35 11	300 21	1/4	1/2	DP5600 OLP	37 17	500 35	1
DP5650 OLP	44 20	3/8 10	.600 15	50 15	300 21	1/4	1/2	DP5605 OLP	38 17	500 35	2
DP7650 OLP	50 23	3/8 10	.600 15	50 15	300 21	1/4	1/2	DP7600 OLP	44 20	500 35	3
DP5835 OLP	52 24	1/2 13	.750 19	35 11	300 21	3/8	1/2	DP5800 OLP	38 17	500 35	2
DP7850 OLP	53 24	1/2 13	.750 19	50 15	300 21	3/8	1/2	DP7800 OLP	45 20	500 35	4
DP7850 OLP121	53 24	1/2 13	.750 19	50 15	300 21	1/2	1/2	DP7800 OLP	45 20	500 35	4
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)											
DP7650 OMP	55 25	3/8 10	.690 18	50 15	2600 179	3/8	1/2	DP7600 OMP	45 20	3000 207	3
DP5835 OMP	54 24	1/2 13	.820 21	35 11	3250 224	1/2	1/2	DP5800 OMP	40 18	3250 224	2
DP7850 OMP	64 29	1/2 13	.820 21	50 15	3250 224	1/2	1/2	DP7800 OMP	45 20	3250 224	4
High Pressure Grease Reels Maximum Temperature 210 °F (99 °C)											
DP7450 OHP	59 27	1/4 6	.580 15	50 15	5000 345	1/4	1/2	DP7400 OHP	44 20	5000 345	3
DP5635 OHP	43 20	3/8 10	.730 19	35 11	4800 331	3/8	1/2	DP5600 OHP	40 18	5000 345	2
DP7650 OHP	65 29	3/8 10	.730 19	50 15	4800 331	1/4	1/2	DP7600 OHP	46 21	5000 345	3

Low pressure reels furnished standard with PVC hose. Medium pressure reels furnished standard with S.A.E. 100 R1T one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose. Reference page 4 for guide arm positions.

Available Options

Mounting Brackets

See page 47



Inlet Hose Assemblies

See page 49



Replacement Bumpers

See page 49



Replacement Hoses

See page 50



Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

Indiana & California Warehouses

California Warehouse

Canadian Warehouse

Customer Service: 1.855.634.9109
All Other Calls: 1.800.444.3134


REELCRAFT®

Vehicle-Mount Reels | Series D8000 / E8000



D8650 OLP

Made in USA 

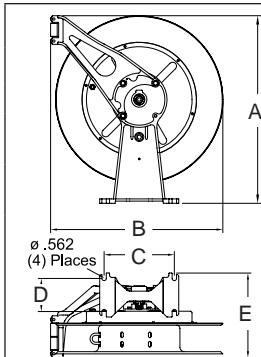

Dimensions

	D/E8000 O		D8000 E	
	in	mm	in	mm
A	21 1/8	537	21 5/8	549
B	19	483	20 7/8	530
C	7 7/8	200	7 7/8	200
D	3 3/4	95	3 3/4	98
E	9 1/4	235	10 1/2	267

Heavy Duty Spring Retractable Reels

Air/Water/Oil/Grease - 1/4", 3/8", 1/2" I.D.

The heavy duty aluminum cast base and arm of the Series D8000 and E8000 offers the highest rigidity among this class of hose reels. The guide arm is field-adjustable for various truck mounting locations. The durable baked-on, powder-coat finish provides a high quality ultra-violet radiation (sunlight), weather and chip-resistant finish.

Enclosed Reels
D8650 ELP



Series D8000 E reels are the same as D8000 O reels except **these reels are fully enclosed**. To order, change the model number suffix letter O to E. Example, D8650 OLP becomes D8650 ELP. Add 17 pounds to open reel weight.

FEATURES

- ✓ The high tensile strength aluminum guide arm and base gives maximum strength with minimum payload weight.
- ✓ A special heavy, double adhesive sided spring case gasket protects the main spring from damage (failure) caused by water, dirt or other foreign matter entering the spring case.
- ✓ Full flow shaft and swivel.
- ✓ Reel springs are manufactured from the highest quality scale-less blue tempered steel.

Model with Hose	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		**Max Pressure	(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Model without hose & bumper	Shipping Weight		Pressure		
	lbs	kg	in	mm	in	mm	ft	m					lbs	kg	psi	bar	
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) w/hose / 210 °F (99 °C) w/o hose															**Maximum working pressure at 70 °F (20 °C)		
D8650 OLP	45	20	3/8	10	.600	15	50	15	300	21	1/4	1/2	D8600 OLP	40	18	500	35
D8670 OLP	47	21	3/8	10	.600	15	70	21	300	21	1/4	1/2	D8600 OLP	40	18	500	35
D8850 OLP	47	21	1/2	13	.750	19	50	15	300	21	3/8	1/2	D8800 OLP	41	19	500	35
E8850 OLP*	47	21	1/2	13	.750	19	50	15	300	21	3/8	1/2	E8800 OLP	41	19	500	35
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)																	
D8650 OMP	47	21	3/8	10	.690	18	50	15	2600	179	3/8	1/2	D8600 OMP	43	20	3000	207
D8840 OMP	53	24	1/2	13	.820	21	40	12	3250	224	1/2	1/2	D8800 OMP	43	20	3250	224
D8850 OMP	57	26	1/2	13	.820	21	50	15	3250	224	1/2	1/2	D8800 OMP	43	20	3250	224
E8850 OMP*	57	26	1/2	13	.820	21	50	15	3250	224	1/2	1/2	E8800 OMP	43	20	3250	224
High Pressure Grease Reels Maximum Temperature 210 °F (99 °C)																	
D8450 OHP	53	24	1/4	6	.580	15	50	15	5000	345	1/4	1/2	D8400 OHP	44	20	5000	345
D8650 OHP	60	27	3/8	10	.730	19	50	15	4800	331	1/4	1/2	D8600 OHP	44	20	5000	345
E8650 OHP*	60	27	3/8	10	.730	19	50	15	4800	331	1/4	1/2	E8600 OHP	44	20	5000	345

*Series E8000 models are for lubrication trucks. Low pressure reels furnished standard with PVC hose. Medium pressure reels are furnished standard with S.A.E. 100 R1T one wire braid hose. High pressure reels furnished standard with SAE 100 R2T two wire braid hose. Reference page 4 for guide arm positions.

Available Options

Optional Roller Guides
See page 47



Inlet Hose Assemblies
See page 49



Replacement Bumpers
See page 49



Replacement Hoses
See page 50



Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

 Indiana Warehouse

 California & Warehouses

 California Warehouse

 Canadian Warehouse

Heavy Duty Spring Retractable Reels

Air/Water/Oil/Grease - 3/8", 1/2", 3/4", 1" I.D.

Reelcraft's Series 80000 and D80000 spring retractable reels incorporate the most current design and manufacturing techniques to increase service life and performance. The all-steel construction and a baked-on powder coat finish combine to produce a rugged, corrosion-resistant product suitable for a wide variety of heavy duty applications. Series D80000 reels are also supplied with Reelcraft's ball-bearing style swivel.

FEATURES

- ✓ Hose anti latch-out feature ensures hose retracts every time.
- ✓ Guide arm is field adjustable for wall, ceiling, or truck mounting positions.
- ✓ Dual pedestal base and guide arm design are structurally reinforced.
- ✓ Five-in-one, heat-treated aluminium casting incorporates main shaft, ratchet, spring arbor and inlet/outlet plumbing in one-piece casting.
- ✓ Containerized spring assembly provides safer and easier handling during maintenance.
- ✓ Two sealed ball bearings for smooth rotation of main shaft.



82100 OLP

		Dimensions - Size Index			
		1	2	3	
		in	mm	in	mm
A	25 ³ / ₈	645	25 ³ / ₈	645	25 ³ / ₈ 645
B	24	610	24	610	24 610
C	10	254	10 ¹ / ₂	267	10 ¹ / ₂ 267
D	6	152	7 ⁷ / ₈	200	7 ⁷ / ₈ 200
E	10 ¹ / ₂	267	13	330	15 ³ / ₄ 400
F	8 ¹ / ₈	206	10 ³ / ₈	264	10 ³ / ₈ 264

Model with Hose	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	**Max Pressure	(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Model without hose & bumper		Shipping Weight	Pressure	Size Index
								lbs	kg	in	mm	#
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) w/ hose / 210 °F (99 °C) w/o hose **Maximum working pressure at 70 °F (20 °C)												
81100 OLP	82	37	3/8 10	.600 15	100 30	300 21	3/8	1/2	81000 OLP	77	35	500 35 1
82075 OLP	87	39	1/2 13	.750 19	75 23	300 21	1/2	1/2	82000 OLP	82	37	500 35 1
82100 OLP	95	43	1/2 13	.750 19	100 30	300 21	1/2	1/2	82000 OLP	82	37	500 35 1
83050 OLP	88	40	3/4 19	1.075 27	50 15	250 17	3/4	3/4	83000 OLP	77	35	500 35 1
F83050 OLP*	89	41	3/4 19	1.075 27	50 15	50 3	3/4	3/4	F83000 OLP	74	34	500 35 1
D83075 OLP	102	46	3/4 19	1.075 27	75 23	250 17	3/4	3/4	D83000 OLP	83	38	500 35 2
D84050 OLP	103	47	1 25	1.375 35	50 15	250 17	3/4	1	D84000 OLP	91	41	500 35 3
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)												
82075 OMP	101	46	1/2 13	.850 22	75 23	2000 138	1/2	1/2	82000 OMP	82	37	2000 138 1
83050 OMP	98	44	3/4 19	1.188 30	50 15	1250 86	3/4	3/4	83000 OMP	84	38	1500 104 1
High Pressure Grease Reels Maximum Temperature 210 °F (99 °C)												
81075 OHP	111	50	3/8 10	.730 19	75 23	4800 331	3/8	3/8	81000 OHP	85	39	5000 345 1
81100 OHP	127	58	3/8 10	.730 19	100 30	4800 331	3/8	3/8	81000 OHP	85	39	5000 345 1

*Model F83050 OLP equipped with UL330 and ULC approved fuel grade hose. 250 psi (17 bar) minimum burst. For all metric thread connections over 1/2" add the suffix number 70 to indicate BSPT threads - example 83050 OLP70. Low pressure reels furnished standard with PVC hose. Medium pressure reels are furnished standard with S.A.E. 100 R1T one wire braid hose. High pressure reels furnished standard with SAE 100 R2T two wire braid hose. Modifications: Reels without hose can be modified to handle gasoline and diesel fuel. To order, place prefix "F" before model number (F83000 OLP). Reference page 4 for guide arm positions.

Available Options

Mounting Brackets

See page 47



Inlet Hose Assemblies

See page 49



Replacement Bumpers

See page 49



Replacement Hoses

See page 50



Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

Indiana & California Warehouses

California Warehouse

Canadian Warehouse

Low Profile Hose Reels | Series SD10000



SD13050 OLP

SPECIFICATIONS

- High impact UHMW guide rollers
- Corrosion resistant powder coat paint
- 13/8" solid main shaft
- Four 5/8" tie rods maintain reel integrity and provide added support
- Containerized external drive spring assembly is easily and safely serviced
- Ultra low profile design for mounting in cabinetry
- Ductile iron fluid path parts
- Stainless latch spring and widened aluminum ratchet/pawl
- Torsion spring for longer service life

Made in USA 

		Size Index	
	1 in mm	2 in mm	
A	18 1/4 464	18 1/4 464	
B	19 1/8 486	19 1/8 486	
C	14 356	14 356	
D	11 1/4 286	13 1/4 337	
E	18 3/4 476	20 3/4 527	
F	8 203	10 254	

All models are bottom wind unless otherwise specified. Additional bracket required for other guide arm positions.

Model with Hose	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	**Max Pressure	(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Model without hose & bumper	Size Index		
									lbs kg	psi bar	#
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C)											**Maximum working pressure at 70 °F (20 °C)
SD13035 OLP	95 43	3/4 19	1.188 30	35 11	250 17	3/4	1	SD13000 OLP	85 39	500 35	1
SD13050 OLP	105 48	3/4 19	1.188 30	50 15	250 17	3/4	1	SD13000 OLP	85 39	500 35	1
SD14035 OLP	102 46	1 25	1.375 35	35 11	250 17	3/4	1	SD14000 OLP	85 39	500 35	1
SD14050 OLP	125 57	1 25	1.375 35	50 15	250 17	3/4	1	SD14005 OLP	92 42	500 35	2
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)											
SD13035 OMP	95 43	3/4 19	1.188 30	35 11	1250 86	3/4	1	SD13000 OMP	85 39	3000 207	1
SD13050 OMP	105 48	3/4 19	1.188 30	50 15	1250 86	3/4	1	SD13000 OMP	85 39	3000 207	1
Vacuum Recovery Reels Maximum Temperature 210 °F (99 °C)											
SD13035 OVP	95 43	3/4 19	1.260 32	35 11	28 Hg~300 psi	3/4	1	SD13000 OVP	85 39	28 Hg~300 psi	1
SD13050 OVP	105 48	3/4 19	1.260 32	50 15	28 Hg~300 psi	3/4	1	SD13000 OVP	85 39	28 Hg~300 psi	1
SD14035 OVP	102 46	1 25	1.496 38	35 11	28 Hg~250 psi	1	1	SD14000 OVP	85 39	28 Hg~300 psi	1
SD14050 OVP	125 57	1 25	1.496 38	50 15	28 Hg~250 psi	1	1	SD14005 OVP	92 42	28 Hg~300 psi	2

NOTE: Vacuum Recovery Reel capacities based on using SAE 100 R4 hose or equivalent. Minimum bend radius is 8", max O.D. 1.500".

Available Options

Optional Roller Guides
See page 47



Inlet Hose Assemblies
See page 49



Replacement Bumpers
See page 49



Replacement Hoses
See page 50



Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

 Indiana Warehouse

 Indiana & California Warehouses

 California Warehouse

 Canadian Warehouse

Ultimate Duty Spring Retractable Reels

Air/Water/Oil/Grease - 1/2", 3/4", 1", 1 1/4", 1 1/2" I.D.

Series 9000 mobile base reels offer the greatest amount of stability for high volume air, water, diesel fuel and gasoline. Ideal for portable service trucks, permanent service or plant work areas. A durable baked-on powder coat finish produces a rugged corrosion resistant product suitable for a wide variety of heavy duty applications. Basic reels without hose will handle air, water or oil; consult Reelcraft for other applications.

		Dimensions - Size Index					
		1		2		3	
		in	mm	in	mm	in	mm
A	26 3/8	670	670	26 3/8	670	26 3/8	670
B	26 1/4	667	667	26 1/4	667	26 1/4	667
C	22 1/4	565	565	22 1/4	565	22 1/4	565
D	7 3/4	197	197	13 1/2	343	7 3/4	197
E	12	305	305	17 3/4	451	13 3/8	340
F	24 1/8	613	613	24 1/8	613	24 1/8	613
G	4 3/4	121	121	3 7/8	98	4 1/2	114
C	ø .437 (4) Places						

Made
in USA



D9350 OLPBW

Hose Guide Roller Position		
	TW	RIGHT HAND INLET
	BW	RIGHT HAND INLET
	SW	LEFT HAND INLET

A suffix code (see diagram) must be added after the model number to specify desired position. Reels are shipped in the BW position unless specified otherwise. FF9500/9600 in BW only.

Model with Hose	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		**Max Pressure	(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Model without hose & bumper	Shipping Weight		Pressure		Size Index #	
	lbs	kg	in	mm	in	mm	ft	m					lbs	kg	psi	bar		
Low Pressure Air/Water Reels Maximum Temperature 150 °F (65 °C) **Maximum working pressure at 70 °F (20 °C)																		
D9275 OLP	122	55	1/2	13	.750	19	75	23	300	21	1/2	1/2	D9200 OLP	115	52	500	35	1
D9299 OLP	127	58	1/2	13	.750	19	100	30	300	21	1/2	1/2	D9200 OLP	115	52	500	35	1
D9350 OLP	140	64	3/4	19	1.075	27	50	15	250	17	3/4	3/4	D9300 OLP	115	52	500	35	1
D9375 OLP	152	69	3/4	19	1.075	27	75	23	250	17	3/4	3/4	D9300 OLP	115	52	500	35	1
D9399 OLPBW	143	65	3/4	19	1.075	27	100	30	250	17	3/4	3/4	D9305 OLPBW	115	52	500	35	3
D9450 OLP	157	71	1	25	1.375	35	50	15	250	17	3/4	1	D9400 OLP	115	52	500	35	1
D9465 OLPBW	164	74	1	25	1.375	35	65	20	250	17	3/4	1	D9405 OLPBW	115	52	500	35	3
Not available with hose	1 1/4	32	1.750	44	50	15	---	---	---	---	1 1/2	FF9500 OLPBW	125	57	600	41	2	
Not available with hose	1 1/2	38	2.000	51	50	15	---	---	---	---	1 1/2	FF9600 OLPBW	135	61	600	41	2	
Medium Pressure Oil Reels Maximum Temperature 210 °F (99 °C)																		
D9275 OMP	131	59	1/2	13	.820	21	75	23	3250	224	1/2	1/2	D9200 OMP	117	53	3250	224	1
D9350 OMP	142	64	3/4	19	1.188	30	50	15	1250	86	3/4	3/4	D9300 OMP	117	53	3000	207	1
E9450 OMP	160	73	1	25	1.480	38	50	15	3250	224	1	1	E9400 OMP	120	54	3250	224	1
High Pressure Grease Reels Maximum Temperature 210 °F (99 °C)																		
D9175 OHP	153	69	3/8	10	.730	19	75	23	4800	331	3/8	1/2	D9100 OHP	118	54	5000	345	1
Low pressure reels furnished standard with PVC hose. Medium pressure reels are furnished standard with S.A.E. 100 R1T one wire braid hose. High pressure reels furnished standard with S.A.E. 100 R2T two wire braid hose. For all metric thread connections over 1/2" add the suffix number 70 to indicate BSPT threads - example D9300 OLP70. FF9500 and FF9600 models will have BSPP threads. Note: Change prefix from D to E to specify our heavy duty model with larger spring capacity, additional seals and grease fittings. Not available on FF9500 or FF9600. Modification: Reels without hose can be modified to handle gasoline and diesel fuel, to order place prefix "F" before model number - example (FD9300 OLP). Reference page 4 for guide arm positions.																		

Available Options

Optional
Roller Guides
See page 47



Inlet Hose
Assemblies
See page 49



Replacement
Bumpers
See page 49



Replacement
Hoses
See page 50



Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

Indiana & California
Warehouses

California Warehouse

Canadian Warehouse

Customer Service: 1.855.634.9109
All Other Calls: 1.800.444.3134

 REELCRAFT®

Large Frame Hose Reels | Series 3100 / 4800


Twin hose models are available as standard.



Nordic Series 4800



Dimensions Diagram

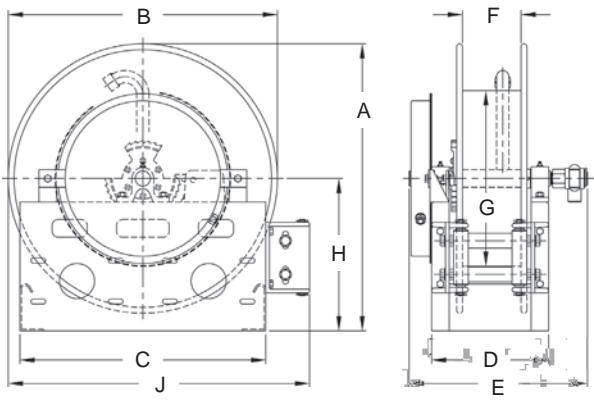

Series 3100 / 4830 product temperatures from -50 °F to +225 °F and standard pressures to 3000 psi. **Series 4800** product temperatures from -50 °F to +225 °F at standard pressures to 300 psi for 2" and 600 psi for 1½" I.D. hose. Reels to operate at other temperatures or pressures can be furnished at extra cost. Consult manufacturer. The standard color for this series is red or gray.

Hose stop: A hose stop should be used to prevent damage to rollers and nozzles and to permit adjustment of free hose length. See description on page 49. Hose stops are available at extra cost.

Note: Other sizes and/or threads can be furnished for gooseneck when specified.

Specification - Hose Capacity and Reel Dimensions

*20" (508 mm) diameter drum on Model #4830-31-10 for ½" and ¾" hose

Hose I.D.	in mm	1/2 13	3/4 19	1 25	1 1/4 32	1 1/2 38	Est. Weight	A	B	C	D	E	F	G	H	J	
Hose O.D.	in mm	7/8 22	1 9/32 33	1 9/16 40	1 13/16 46	2 1/16 52											
Model	Hose Length																
3101-19-4	ft m	30 9	25 8	15 5			90 LB 41 KG	in mm	22.5 572	19 483	21 533	9 229	15.5 394	4 102	11.25 286	13 330	25 635
3101-23-4	ft m	60 18	40 12	25 8			93 LB 42 KG	in mm	24.5 622	23 584	21 533	9 229	15.5 394	4 102	11.25 286	13 330	26 660
3101-23-6	ft m	100 30	65 20	60 18			95 LB 43 KG	in mm	24.5 622	23 584	21 533	11 279	17.5 445	6 152	11.25 286	13 330	26 660
3101-23-8	ft m	100 30	65 20	60 18			97 LB 44 KG	in mm	24.5 622	23 584	21 533	13 330	19.5 495	8 203	11.25 286	13 330	26 660
4830-31-5X	ft m	75 23	75 23	65 20			122 LB 55 KG	in mm	33 838	31 787	30 762	10.44 265	17 432	5.5 140	20 508	17.5 445	34.5 876
4830-31-8	ft m	80 24	80 24	90 27			125 LB 57 KG	in mm	33 838	31 787	30 762	13.44 341	19.5 495	8 203	11.25 381	17.5 381	34.5 876
4830-31-10	ft m	*90 *27	*100 *30	100 30			128 LB 58 KG	in mm	33 838	31 787	30 762	15.44 392	21.5 546	10 254	*15 *381	17.5 445	34.5 876
4800-31-6	ft m			70 21	50 15	40 12	122 LB 55 KG	in mm	33 838	31 787	30 762	11.44 291	17 432	6 152	11.25 286	17.5 445	34.5 876
4800-31-8	ft m			75 23	75 23	50 15	125 LB 57 KG	in mm	33 838	31 787	30 762	13.44 341	19 483	8 203	11.25 286	17.5 445	34.5 876

Twin Hose, Spring Retractable Reels

Dual Hydraulic - 1/4", 3/8", 1/2" I.D.

Reelcraft's hydraulic reels are used for medium pressure dual hydraulic hose applications and are ideal for operating hydraulic cylinders, tools and equipment. All twin hydraulic models include a full flow, high volume swivel for maximum product delivery. Series TH reels incorporate contemporary engineering and manufacturing techniques for high quality performance. Reels are all-steel construction and compact for applications with critical space requirements.



Made
in USA


TH5425 OMP



TH7445 OMP


Applications

- Cranes
- Construction equipment
- Hydraulic tools
- Vehicle extraction tools
- Aerial device
- Hydraulic cylinders
- Tree cutters
- Digger derricks
- Railroad maintenance tools

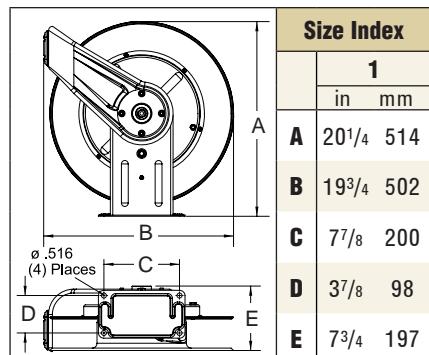


Size Index

	1
	in mm
A	20 ¹ / ₄ 514
B	19 ³ / ₄ 502
C	7 ⁷ / ₈ 200
D	3 ⁷ / ₈ 98
E	7 ³ / ₄ 197

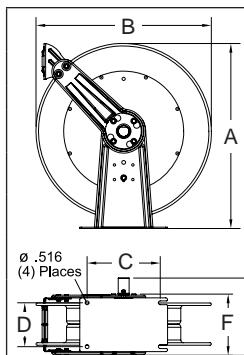

Size Index

	2
	in mm
A	25 ³ / ₈ 645
B	24 610
C	10 254
D	6 152
E	12 ⁷ / ₈ 327
F	8 ¹ / ₈ 206

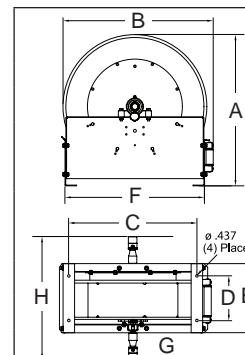

Size Index

	3
	in mm
A	26 ³ / ₈ 670
B	26 ¹ / ₄ 667
C	22 ¹ / ₄ 556
D	7 ³ / ₄ 195
E	12 305
F	24 ¹ / ₈ 613
G	4 ³ / ₄ 121
H	21 ¹ / ₂ 546

Model with Hose	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Model without hose & bumper	Shipping Weight	Pressure	Size Index
	lbs kg	in mm	in mm	ft m	psi bar	in	in		lbs kg	psi bar	#
Medium Pressure Hydraulic Hose Reels Maximum Temperature 210 °F (99 °C)											
TH5425 OMP	34 15	1/4 6	.530 13	25 8	2000 138	1/4	1/4	TH5400 OMP	24 11	3000 207	pg. 9
TH7445 OMP	60 27	1/4 6	.530 13	45 14	2000 138	1/4	1/4	TH7400 OMP	44 20	3000 207	1
THA7630 OMP	53 24	3/8 10	.660 17	30 9	2000 138	3/8	3/8	THA7600 OMP	44 20	3000 207	1
TH86050 OMP	99 45	3/8 10	.710 18	50 15	2000 138	3/8	3/8	TH86000 OMP	88 40	3000 207	2
THA7825 OMP	57 26	1/2 13	.850 22	25 8	2000 138	1/2	1/2	THA7800 OMP	50 23	3000 207	1
TH88050 OMP	104 47	1/2 13	.850 22	50 15	2000 138	1/2	1/2	TH88000 OMP	88 40	3000 207	2
TH9265 OMPBW	155 70	1/2 13	.910 24	65 20	2000 138	1/2	1/2	TH9200 OMPBW	120 54	3000 207	3

Reference page 4 for guide arm positions.

Available Options



Mounting
Brackets
See page 47



Inlet Hose
Assemblies
See page 49



Replacement
Bumpers
See page 49



Replacement
Hoses
See page 50

Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

Indiana & California Warehouses

California Warehouse

Canadian Warehouse

Fuel Delivery Reels | Series F7000 / FE/FD/FF9000 / F/FD80000 / G



FD83075 OLP

Spring Retractable Fuel Reels

F7000 - 3/4" I.D. / **FF9000** - 1 1/4", 1 1/2" I.D.

FE9000, FD9000 - 3/4", 1" I.D.

F80000, FD80000 - 3/4", 1" I.D.

FSD10000 - 3/4", 1" I.D.

Reelcraft's spring retractable fuel delivery reels, equipped with Viton seals, incorporate metal forms to insure the greatest possible strength and are ideal for mobile and permanent-mount applications. These rugged, corrosion-resistant reels are suitable for a wide variety of fuel applications including E85. Series F/FD/FE/FSD reels are all supplied with our ball-bearing style swivel.

Model with Hose	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Model without hose & bumper	Shipping Weight	Pressure	Size Index	Size Index
	lbs kg	in mm	in mm	ft m	psi bar	in	in		lbs kg	psi bar	Page	#
Low Pressure Fuel Reels Maximum Temperature 150 °F (65 °C) w/hose / 210 °F (99 °C) w/o hose												
F7925 OLP	47 21	3/4 19	1.188 30	25 8	*50 3	3/4	3/4	F7900 OLP	45	20	500	35
F83050 OLP	89 40	3/4 19	1.188 30	50 15	*50 3	3/4	3/4	F83000 OLP	74	34	500	35
FD83075 OLP	115 52	3/4 19	1.188 30	75 23	*50 3	3/4	3/4	FD83000 OLP	82	37	500	35
FD84035 OLP	94 43	1 25	1.500 38	35 11	*50 3	1	1	FD84000 OLP	84	38	500	35
FD84050 OLP	115 52	1 25	1.500 38	50 15	*50 3	1	1	FD84000 OLP	84	38	500	35
FE9350 OLP	140 64	3/4 19	1.188 30	50 15	*50 3	3/4	3/4	FE9300 OLP	115	52	500	35
FE9450 OLP	157 71	1 25	1.500 38	50 15	*50 3	1	1	FE9400 OLP	115	52	500	35
FD9350 OLP	140 64	3/4 19	1.188 30	50 15	*50 3	3/4	3/4	FD9300 OLP	114	52	500	35
FD9450 OLP	157 71	1 25	1.500 38	50 15	*50 3	1	1	FD9400 OLP	113	51	500	35
Not available with hose	1 1/4 32	1.750 44	50 15	-- --	-- --	1 1/4	1 1/2	FF9500 OLPBW	125	57	600	41
Not available with hose	1 1/2 38	2.000 51	50 15	-- --	-- --	1 1/2	1 1/2	FF9600 OLPBW	135	61	600	41
FSD13035 OLP	102 46	3/4 19	1.188 30	35 11	*50 3	3/4	1	FSD13000 OLP	85	39	500	35
FSD13050 OLP	110 50	3/4 19	1.188 30	50 15	*50 3	3/4	1	FSD13000 OLP	85	39	500	35
FSD14035 OLP	105 48	1 25	1.500 38	35 11	*50 3	1	1	FSD14000 OLP	85	39	500	35
FSD14050 OLP	127 58	1 25	1.500 38	50 15	*50 3	1	1	FSD14005 OLP	92	42	500	35

*Models equipped with UL330 and ULC approved fuel grade hose. 250 psi minimum burst (17 Bar). For all metric thread connections 1" and under add the suffix number 70 to indicate BSPT threads, example FD80000 OLP70. For all metric threads above 1" add 118 for BSPP threads. FF Models supplied with 1 1/2" inlet. Flow rates of fuel hose are reduced by 30% with addition of internal spring type bend restrictors. For example, flow rate of F7925 OLP with internal bend restrictors is 9.0 GPM at 40 psi; flow without internal bend restrictors is 13.0 GPM at 40 psi. Reference page 4 for guide arm positions.

Static Discharge / Grounding Reels Series G 3000

Static discharge reels are used to ground equipment operating in hazardous atmospheres. When properly clamped to ground, the static discharge reel dissipates static electrical buildup, reducing the chances of sparking and the potential for explosion.

Model	Cable Extended	Clamp Rating	Max Temp	Cable Notes		Shipping Weight
	ft m					lbs kg
G 3050	50 15	100 AMP	150 66	Single 7 x 7 stranded steel*		12 5
G 3050 Y	50 15	100 AMP	150 66	35' (9.2m) plus dual 15' (4.6m) for Y* Total extension 50' (15m)		12 5
G 3050 N	50 15	100 AMP	150 66	Nylon covered cable**		12 5
GA3100 N	100 30	100 AMP	125 52	Hi-vis orange nylon covered cable**		16 7
GHC3100 N	100 30	100 AMP	125 52	Hi-vis orange nylon covered cable**		12 5

*3/32" OD steel aircraft cable. DC resistance is approximately one ohm per 50 ft. of steel cable. **Nylon covered cable (1/8" O.D.). Refer to reelcraft.com for dimensions.

Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

Indiana & California Warehouses

California Warehouse

Canadian Warehouse

Stainless Steel Spring Retractable Reels

Air/Water/Oil - 3/8", 1/2", 3/4", 1" I.D.

Reelcraft's stainless steel hose reels are ideal for food processing, pre-rinse, wash down, chemical transfer and industrial-solvent handling. Also suitable for coastal, offshore and on-board ship in marine applications where the harsh environment of salt water spray requires the use of stainless steel hose reels. Swivels include Viton® O-rings.

Note: Standard latch parts are made from aluminium. Series 80000 and D80000 stainless reels have an aluminum fluid path. Stainless latch parts and fluid path are available as a standard option by placing a -S at the end. Example: OLS-S.

FEATURES

- ✓ Full-flow stainless steel shaft and swivel assures maximum product delivery.
- Exception:** Series 80000 - only on OLS-S models.
- ✓ Heavy duty brackets eliminate bending due to angular hose pull.
- ✓ Banded drive spring gives smooth automatic hose retrieval.
- ✓ Multi-position guide arm permits wall, floor, ceiling, pit or truck mounting.
- ✓ Nylon guide rollers reduce hose drag and abrasion.
- ✓ Pos-i-latch will maintain the desired working length of hose. Mechanism assures a positive latch of the hose.
- ✓ Series 7000 offers weatherproof gasketed spring motor, assures maximum service life.
- ✓ Vibration-proof self-locking fasteners assures assembly integrity.
- ✓ 304L grade of stainless steel.



Series 7000



Series D9000

Made in USA 

Model without hose & bumper	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(F)NPTF Outlet	(F)NPTF Inlet	Size Index Page	Size Index #
Low and Medium Pressure Reels Maximum Temperature 210 °F (99 °C)									
CA 5600 OLS	22 10	3/8 10	.600 15	35 11	500 35	3/8	3/8	9	2
CA 5600 OMS	24 11	3/8 10	.710 18	30 9	3000 207	3/8	3/8	9	2
WP LC607 OLS*	35 16	3/8 10	.600 15	70 21	300 21	1/4	1/4	refer to reelcraft.com	
WP LC800 OLS*	33 15	1/2 13	.750 19	50 15	300 21	1/2	1/2	reelcraft.com	
GS 7800 OLS	41 19	1/2 13	.750 19	50 15	500 35	1/2	1/2	10	---
CA 7600 OMS55	42 19	3/8 10	.710 18	66 20	3000 207	3/8	3/8	10	---
CA 7800 OMS	43 20	1/2 13	.850 22	50 15	3000 207	1/2	1/2	10	---
CA 82000 OLS	81 37	1/2 13	.750 19	100 30	500 35	1/2	1/2	13	1
CA 82000 OMS	83 38	1/2 13	.850 22	75 23	1500 104	1/2	1/2	13	1
CA 83000 OLS	81 37	3/4 19	1.188 30	50 15	500 35	3/4	3/4	13	1
CA 83000 OMS	83 38	3/4 19	1.188 30	50 15	1250 86	3/4	3/4	13	1
CA D83000 OLS	84 38	3/4 19	1.188 30	75 23	500 35	3/4	3/4	13	2
CA D84000 OLS	92 42	1 25	1.375 35	50 15	500 35	1	1	13	3
CA D9200 OLS	115 52	1/2 13	.750 19	100 30	500 35	1/2	1/2	15	1
CA D9300 OLS	116 53	3/4 19	1.188 30	75 23	500 35	3/4	3/4	15	1
CA D9400 OLS	117 53	1 25	1.375 35	50 15	500 35	1	1	15	1
CA D9200 OMS	118 54	1/2 13	.850 22	75 23	3000 207	1/2	1/2	15	1
CA D9300 OMS	118 54	3/4 19	1.188 30	50 15	3000 207	3/4	3/4	15	1

For all metric thread connections over 1/2" add the suffix number 70 to indicate BSPT threads - example D83000 OLS70. Reference page 4 for guide arm positions. *Maximum temperature 150 °F (65 °C).

Model without Hose	Shipping Weight	Pressure	(F)NPTF Outlet	(F)NPTF Inlet	I.D.	1/4	6	3/8	10	1/2	13	3/4	19	1	25	Size Index # (see pg. 24)
	Ibs kg	psi bar	in	in	O.D.	.530	13	.710	18	.850	22	1.188	30	1.375	35	
Manual Crank Medium Pressure Reels Maximum Temperature 210 °F (99 °C)																
CA HS18000 M	36 16	3000 207	1/2	1/2		425	130	300	91	200	61	---	---	---	---	1
CA HS28000 M	35 16	3000 207	1/2	1/2		625	191	450	137	300	91	---	---	---	---	2
CA HS19000 M	38 17	3000 207	3/4	3/4		425	130	300	91	200	61	75	23	---	---	1
CA HS29000 M	36 16	3000 207	3/4	3/4		625	191	450	137	300	91	125	38	---	---	2
CA HS37000 L	47 21	500 35	1 (M)	1		---	---	---	---	---	---	---	---	100	30	refer to reelcraft.com

Available Options

Mounting Brackets
See page 47



Inlet Hose Assemblies
See page 49



Replacement Bumpers
See page 49



Replacement Hoses
See page 50



Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

CA Indiana Warehouse


CA Indiana & California Warehouses

CA California Warehouse

CA Canadian Warehouse

Customer Service: 1.855.634.9109
All Other Calls: 1.800.444.3134

 REELCRAFT®

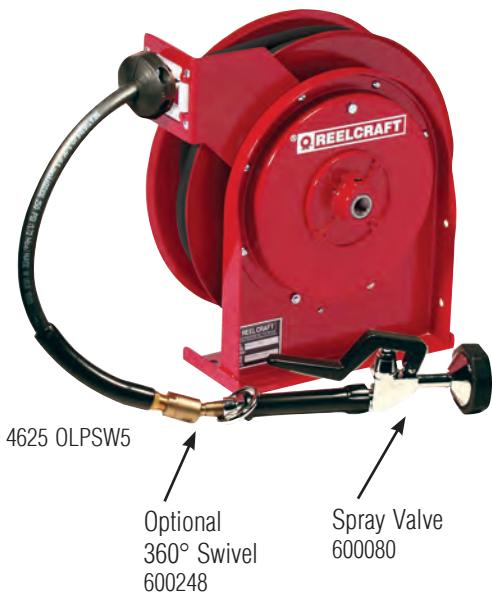

Spring Retractable Pre-Rinse Reels - 3/8" I.D.

Engineered for use in highly corrosive environments such as restaurants, institutions, and home and garden applications. Reelcraft's pre-rinse reels include a standard lever-operated spray valve. Available in stainless or powder-coat finish. Rated for hot water up to 180 °F (82 °C).

PRE-RINSE REEL FEATURES

- ✓ Lever-operated spray valve is included
- ✓ Optional 360° rotating swivel (600248) offers 20° of angular motion
- ✓ Push-Lok, field replaceable, hose-end fittings
- ✓ Reels can be mounted on the wall, ceiling, or under a counter, making water conveniently available
- ✓ Latching mechanism holds hose at desired length



Made in USA



Spring Retractable Potable (Drinking) Water Reel - 1/2" I.D.

Designed for potable water systems, the A5835 OLBSW23 is suitable for use as a drinking water system component. Fluid path is stainless steel and CPVC material.

Drinking Water

Boats, RVs, buses and much more

POTABLE WATER REEL FEATURES

- ✓ Stainless steel, full flow shaft and PVC swivel
- ✓ Convenient fast hook-up and disconnect
- ✓ Drain and standard female garden hose outlet fitting are standard
- ✓ Maximum operating temperature 86 °F (30 °C)

Model with Hose	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(F)NPTF Reel Inlet	Size Index #
	lbs kg	in mm	in mm	ft m	psi bar	in	
4625 OLPSW5	22 10	3/8 10	.640 16	25 8	125 9	3/8	1
5635 OLPSW5	27 12	3/8 10	.640 16	35 11	125 9	3/8	2
5635 ELPSW5	37 17	3/8 10	.640 16	35 11	125 9	3/8	3
Pre-Rinse Stainless Steel Hose Reels	Maximum Temperature 180 °F (82 °C)						
5635 OLSSW5	28 13	3/8 10	.640 16	35 11	125 9	3/8	2
5635 ELSSW5	38 17	3/8 10	.640 16	35 11	125 9	3/8	3
Potable (Drinking) Water Hose Reels	Garden hose fitting 3/4" N/H threads (F)						
A5835 OLBSW23*	28 13	1/2 13	.781 20	35 11	150 10	1/2 male	2

Pressure rating for reel without spray valve is 250 psi (17 bar). *Maximum operating temperature is 86 °F (30 °C). Reference page 4 for guide arm positions.

Dimensions - Size Index									
		B		D		C		E	
		A		ø.343 (4) Places					
		1		2		3			
		in	mm	in	mm	in	mm		
A	12 ⁷ / ₈	327	14 ³ / ₈	365	15	381			
B	12 ³ / ₈	314	14	356	16 ¹ / ₄	413			
C	8	203	9 ³ / ₄	248	9 ³ / ₄	248			
D	2 ¹ / ₂	64	2 ¹ / ₂	64	2 ¹ / ₂	64			
E	5 ⁵ / ₈	143	6 ¹ / ₈	156	7	178			

Available Options

Mounting Brackets
See page 47



Inlet Hose Assemblies
See page 49



Replacement Bumpers
See page 49



Replacement Hoses
See page 50



Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

Indiana & California Warehouses

California Warehouse

Canadian Warehouse

Spring Retractable Composite Reels Air/Water/Chemical Delivery/Welding

1/4", 3/8", 1/2", 5/8" I.D.

Series S reels are economical, lighter weight, easy to handle and meet the demands of a medium-duty industrial grade reel for continuous operation. Made of corrosion-proof, tough polypropylene, extensive tests have shown it to be highly resistant to the vast majority of acids, alkalis and UV rays. The design protects the hose and allows easy cleaning of both hose and reel. Wall, ceiling or floor mount.

A unique combination of composites and metals

The tough composite polypropylene outer case houses solid brass swivel and fluid path, a steel main shaft and high quality spring steel motor.

Corrosion-resistant, durable

The tough composite polypropylene outer case is UV stabilized and resistant to most acids and alkalis with excellent impact resistance. Suitable for general applications and environments where corrosion is an issue.

Positive latching system


The design of the latching system ensures positive latching in any mounting position.

Unique mounting

The bracket system supplied with the reel allows mounting in any position with the advantage of the swivel feature.

Lighter weight

Pound for pound the Series S offers distinct weight advantages due to the composite case construction.

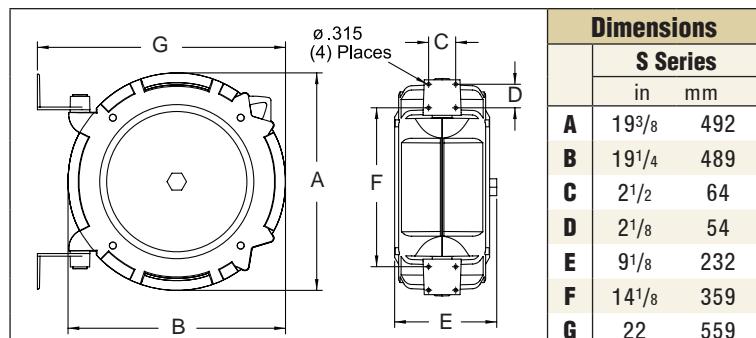

Applications

- Combination air/water
- Water service
- Oxygen acetylene
- Hot water wash

Model with Hose	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	**Max Pressure	(M)NPTF Hose Outlet	(F)NPTF Reel Inlet
	lbs kg	in mm	in mm	ft m	psi bar	in	in
Air* & Water* Hose Reels Working Temperature 150 °F (65 °C)							
SGA3650 OLP	21 10	3/8 10	.621 16	50 15	232 16	3/8	3/8
SGA3665 OLP	25 11	3/8 10	.621 16	65 20	232 16	3/8	3/8
SGA3850 OLP	23 10	1/2 13	.781 20	50 15	232 16	1/2	1/2
Water Hose Reel Garden-style hose end. Working Temperature 150 °F (65 °C)							
SWA3850 OLP	23 10	5/8 16	.750 19	50 15	100 7	3/4 NH	1/2
Hot Water Wash Reel Working Temperature 185 °F (85 °C). **Maximum working pressure at 86 °F (30 °C)							
SHA3850 OLP	22 10	1/2 13	.781 20	50 15	240 17	1/2	1/2
Chemical Delivery Hose Reel Working Temperature 140 °F (60 °C)							
SCA3850 OLP	22 10	1/2 13	.781 20	50 15	232 16	1/2	1/2
Oxygen/Acetylene Hose Reel Working Temperature 150 °F (65 °C)							
STW3450 OLP	27 12	1/4 6	.530 13	50 15	300 21	9/16" 18(F) LH-RH	9/16" 18(F) LH-RH

STW3450 OLP E dimension = 11.25" / 286 mm. *Air hose can be used for water on these models.

Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

California & California Warehouses

California Warehouse

Canadian Warehouse

Available Options

Inlet Hose Assemblies

See page 49



Replacement Bumpers

See page 49



Replacement Hoses

See page 50



Pressure Wash Reels | Series PW / H18006 / 30000



PW7650 OHP



CA38106 M

Applications

- Agriculture
- Marine
- Equipment cleaning
- Pressure washing

Made in USA

	in	mm	in	mm	in	mm	Shipping Weight	Size Index #
Hose I.D.	1/4	6	3/8	10	1/2	13		
Hose O.D.	.530	13	.730	19	.850	22		
Model without hose & bumper	Hose Length							
	ft	m	ft	m	ft	m	lbs	kg
Spring Driven Pressure 5000 psi / 345 bar								
PW7600 OHP	---	---	50	15	---	---	43	20
PW7650 OHP*	---	---	50	15	---	---	60	27
PW81000 OHP	---	---	100	30	---	---	86	39
Hand Crank Pressure 5000 psi / 345 bar								
H18006 M	150	46	100	30	---	---	31	14
CA38106 M	200	61	140	43	100	30	41	19
CA38112 M	425	130	300	91	200	61	46	21
Electric Motor Driven Pressure 5000 psi / 345 bar								
EA38106 M12D	200	61	140	43	100	30	63	29
EA38112 M12D	425	130	300	91	200	61	71	32

Max temperature 212 °F (100 °C). *Hose included - 4800 psi (331 bar). PSI rating based upon 2.4 to 1 safety factor. Reference page 4 for guide arm positions.

Available Options

Mounting Brackets

See page 47



Inlet Hose Assemblies

See page 49



Replacement Bumpers

See page 49



Call customer service for special hoses




Spring Retractable, Hand Crank, Motor Driven

Air/Water - 1/4", 3/8", 1/2" I.D.

Compact design and quality steel construction are incorporated into Reelcraft's full line of pressure wash reels, rated up to 5000 psi. Series PW, H18006 and 30000 reels are able to carry 50 to 425 feet of tangle-free hose and are complete with a high pressure water swivel for maximum product delivery. The high pressure water swivel is designed to handle a broad range of pressures, temperatures and chemicals; perfect for agricultural/marine, equipment cleaning and pressure washing applications.

Dimensions - 7000 & 8000		
	1 in mm	2 in mm
A	20 ¹ / ₄ 514	25 ³ / ₈ 645
B	19 ³ / ₄ 502	24 610
C	7 ¹³ / ₁₆ 198	10 254
D	3 ⁷ / ₈ 98	6 152
E	7 178	10 ¹ / ₂ 267
F	7 178	8 ¹ / ₈ 206

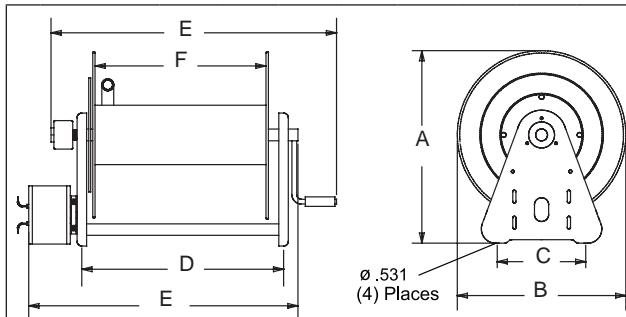

Dimensions - Series H & 30000

	3 in mm	4 in mm	5 in mm	6 in mm	7 in mm
A	20 ¹ / ₈ 413	20 ¹ / ₄ 514			
B	17 ³ / ₄ 425				
C	10 254	9 229	9 229	9 229	9 229
D	6 ³ / ₈ 162	9 ³ / ₄ 248	15 ³ / ₄ 400	9 ³ / ₄ 248	15 ³ / ₄ 400
E	13 ³ / ₄ 349	19 ³ / ₄ 502	25 ³ / ₄ 654	17 ⁷ / ₈ 454	23 ⁷ / ₈ 606
F	5 127	6 152	12 305	6 152	12 305

"B" is overall length.

General Use Hand Crank Hose Reels | Series C

Light Industrial Hand Crank Hose Reels

Reelcraft's Series C hose reels are designed for lighter-duty applications that require longer lengths of hose. Hand crank with a balanced brass swivel and brass inlet, the Series C is the product of lighter weight components and forward-thinking design. Reels in this family benefit from a tough, corrosion-resistant powder coat paint. All reels feature a drag break to prevent de-spooling when reel is not in use. The Series C is an economical choice for storing and retrieving hose.

Series CU Air/Water - 3/8", 1/2" I.D.

Series CU features our most rigid base design in this series and supports the reel on either side.

Series CT Air/Water/Pressure Wash - 3/8", 1/2" I.D.

The Series CT frame features a tubular design. The inlet is fed through the center of the tube frame, protecting the inlet hose and creating a cleaner look over all.

Series CM Pressure Wash - 3/8" I.D.

Series CM reels offer the greatest amount of flexibility in this series by featuring a modular mounting platform. Reelcraft can configure custom mounts upon request or the customer may choose to supply their own.



CM6050HN




CU6050LN

CT6100HN


Dimensions - Series CT

	5		6	
	in	mm	in	mm
A	15 ⁵ / ₈	397	15 ⁵ / ₈	397
B	13 ¹ / ₄	337	13 ¹ / ₄	337
C	3 ¹ / ₂	89	3 ¹ / ₂	89
D	4 ¹ / ₄	108	4 ¹ / ₄	108
E	15 ¹ / ₂	394	19 ¹ / ₂	495
F	6	152	6	152

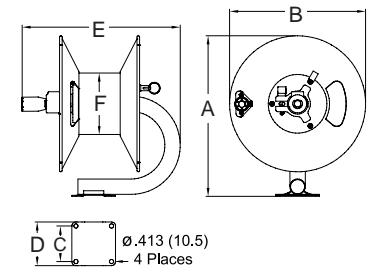

Dimensions - Series CU

	1		2		3		4	
	in	mm	in	mm	in	mm	in	mm
A	11 ¹ / ₂	292	11 ¹ / ₂	292	14 ³ / ₈	365	14 ³ / ₈	365
B	10 ¹ / ₂	267	10 ¹ / ₂	267	13 ¹ / ₄	337	13 ¹ / ₄	337
C	2	51	2	51	2 ³ / ₈	60	2 ³ / ₈	60
D	6 ⁵ / ₈	168	11 ¹ / ₈	283	6 ¹ / ₄	159	10 ¹ / ₄	260
E	16 ³ / ₄	425	21 ¹ / ₈	537	16 ³ / ₄	425	20 ⁷ / ₈	530
F	4	102	4	102	6	152	6	152
G	9 ³ / ₈	238	13 ⁷ / ₈	352	9 ¹ / ₄	235	13 ¹ / ₄	337
H	3 ³ / ₈	86	3 ³ / ₈	86	4	102	4	102

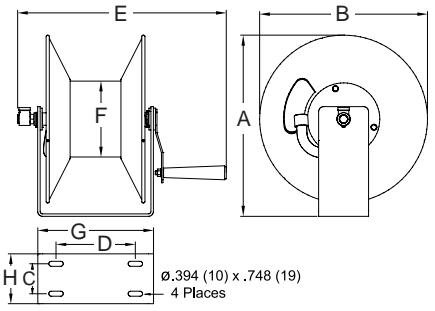

Model w/o hose	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Size Index
	lbs kg	in mm	in mm	ft m	psi bar	in	in	#
Low Pressure Air/Water Reels Maximum temperature 150 °F (65 °C)								
CU6050LN	12 5	3/8 10	.600 15	50 15	300 21	3/8	3/8	1
CU6100LN	16 7	3/8 10	.600 15	100 30	300 21	3/8	3/8	2
CU8050LN	13 6	1/2 13	.750 19	50 15	300 21	1/2	1/2	3
CU8100LN	20 9	1/2 13	.750 19	100 30	300 21	1/2	1/2	4
CT6050LN	13 6	3/8 10	.600 15	50 15	300 21	1/2	1/2	5
CT6100LN	17 7.5	3/8 10	.600 15	100 30	300 21	1/2	1/2	6
CT8050LN	13 6	1/2 13	.750 19	50 15	300 21	1/2	1/2	5
CT8100LN	17 7.5	1/2 13	.750 19	100 30	300 21	1/2	1/2	6
High Pressure Wash Reels Maximum temperature 210 °F (99 °C)								
CT6050HN	13 6	3/8 10	.730 19	50 15	5000 345	3/8	1/2	5
CT6100HN	17 7.5	3/8 10	.730 19	100 30	5000 345	3/8	1/2	6
CM6050HN	14 6.5	3/8 10	.730 19	50 15	5000 345	3/8	1/2 (M)	7
CM6100HN	18 8	3/8 10	.730 19	100 30	5000 345	3/8	1/2 (M)	8

Reels are supplied without hose; assemblies will be quoted upon request.

Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.


Indiana Warehouse

California & California Warehouses

Canada Warehouse

Canadian Warehouse

	7		8	
	in	mm	in	mm
B	14 ³ / ₈	365	18 ³ / ₈	467
C	2 ¹ / ₂	64	2 ¹ / ₂	64
D	3 ¹ / ₂	89	3 ¹ / ₂	89
E	16 ³ / ₈	416	20 ¹ / ₂	521

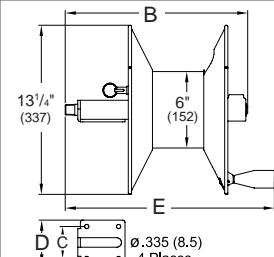

Hand Crank / Motor Driven Reels | Series H / 30000

Medium Duty Hand Crank Reels

Series H - Air/Water/Oil/Grease - 3/8", 1/2", 3/4" I.D.

Series H is an economical reel designed for medium duty applications requiring long lengths of hose. It is equally suited for plant or field use such as turf care, pest control, steam cleaning and more.

Shipped completely assembled, ready to install.

Made in USA 



Medium duty
H16000

Model without hose	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Size Index
	lbs kg	in mm	in mm	ft m	psi bar	in	in	#
Low Pressure Air/Water Hose Reels Max temperature 150 °F (65 °C)								
H16000	32 15	3/8 10	.600 15	300 91	500 35	1/4	3/8	1
H26000	34 15	3/8 10	.600 15	450 137	500 35	1/4	3/8	2
H18005	33 15	1/2 13	.750 19	175 53	1000 69	1/2	1/2	5
H18000	34 15	1/2 13	.750 19	200 61	1000 69	1/2	1/2	1
H28005	34 15	1/2 13	.750 19	300 91	1000 69	1/2	1/2	4
H28000	37 17	1/2 13	.750 19	300 91	1000 69	1/2	1/2	2
H19000	33 15	3/4 19	1.075 27	105 32	1000 69	3/4	3/4	1
H29005	36 16	3/4 19	1.075 27	100 30	1000 69	3/4	3/4	3
H29000	41 19	3/4 19	1.075 27	150 46	1000 69	3/4	3/4	2
Medium Pressure Oil Hose Reels Max temperature 210 °F (99 °C)								
H16000 M	32 15	3/8 10	.710 18	300 91	3000 207	3/8	3/8	1
H18000 M	34 15	1/2 13	.850 22	200 61	3000 207	1/2	1/2	1
H19000 M	38 17	3/4 19	1.188 30	80 24	3000 207	3/4	3/4	1
H29000 M	35 16	3/4 19	1.188 30	150 46	3000 207	3/4	3/4	2
High Pressure Grease Hose Reels Max temperature 210 °F (99 °C)								
H16000 H	35 16	3/8 10	.730 19	250 76	5000 345	3/8	3/8	1

Made in USA



Reels are supplied without hose; assemblies will be quoted upon request. **CAUTION:** To prevent drum damage fully extend and pressurize hose and rewind on the reel. Stainless models available, see page 19.

Model	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Size Index
	lbs kg	in mm	in mm	ft m	psi bar	in	in	#
H16000								
H16000	35 16	3/8 10	.730 19	250 76	5000 345	3/8	3/8	1

Hose Installation: The Series 30000 gooseneck is easily removed from the reel for hose attachment. Simply remove the four fasteners attaching gooseneck to reel, connect hose to the gooseneck and re-connect to the reel. NOTE: Do not discard the O-ring; insure that the O-ring is properly fitted into the grooves when replacing the gooseneck.

Model	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Size Index
	lbs kg	in mm	in mm	ft m	psi bar	in	in	#
H16000								
H16000	35 16	3/8 10	.730 19	250 76	5000 345	3/8	3/8	1

Model	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Size Index
	lbs kg	in mm	in mm	ft m	psi bar	in	in	#
H16000								
H16000	35 16	3/8 10	.730 19	250 76	5000 345	3/8	3/8	1

Model	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Size Index
	lbs kg	in mm	in mm	ft m	psi bar	in	in	#
H16000								
H16000	35 16	3/8 10	.730 19	250 76	5000 345	3/8	3/8	1

Model	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Size Index
	lbs kg	in mm	in mm	ft m	psi bar	in	in	#
H16000								
H16000	35 16	3/8 10	.730 19	250 76	5000 345	3/8	3/8	1

Model	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Size Index
	lbs kg	in mm	in mm	ft m	psi bar	in	in	#
H16000								
H16000	35 16	3/8 10	.730 19	250 76	5000 345	3/8	3/8	1

Model	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Size Index
	lbs kg	in mm	in mm	ft m	psi bar	in	in	#
H16000								
H16000	35 16	3/8 10	.730 19	250 76	5000 345	3/8	3/8	1

Model	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Size Index
	lbs kg	in mm	in mm	ft m	psi bar	in	in	#
H16000								
H16000	35 16	3/8 10	.730 19	250 76	5000 345	3/8	3/8	1

Model	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Size Index
	lbs kg	in mm	in mm	ft m	psi bar	in	in	#
H16000								
H16000	35 16	3/8 10	.730 19	250 76	5000 345	3/8	3/8	1

Model	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Size Index
	lbs kg	in mm	in mm	ft m	psi bar	in	in	#
H16000								
H16000	35 16	3/8 10	.730 19	250 76	5000 345	3/8	3/8	1



Model	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Size Index
	lbs kg	in mm	in mm	ft m	psi bar	in	in	#
H16000								
H16000	35 16	3/8 10	.730 19	250 76	5000 345	3/8	3/8	1

Model	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Size Index
	lbs kg	in mm	in mm	ft m	psi bar	in	in	#
H16000								
H16000	35 16	3/8 10	.730 19	250 76	5000 345	3/8	3/8	1

Model	Shipping Weight	Hose I.D.	Hose O.D.	Hose Length	Pressure	(F)NPTF Reel Outlet	(F)NPTF Reel Inlet	Size Index
	lbs kg	in mm						
<th

Long Hose Lengths | Series 30000

	Hose I.D.	1/4"	3/8"	1/2"	3/4"	1"
	Hose O.D.	(6.4 mm)	(9.5 mm)	(12.7 mm)	(19.1 mm)	(25.4 mm)
"F" Width	Weight					
6" (152 mm)	38 lb (18 kg)	200' (61 m)	140' (43 m)	100' (30 m)	50' (15 m)	N/A
12" (305 mm)	46 lb (21 kg)	425' (130 m)	300' (91 m)	200' (61 m)	100' (30 m)	50' (15 m)
18" (457 mm)	54 lb (24 kg)	625' (191 m)	450' (137 m)	325' (99 m)	175' (54 m)	100' (31 m)
22" (559 mm)	58 lb (27 kg)	780' (238 m)	550' (168 m)	400' (122 m)	225' (69 m)	125' (38 m)
27" (686 mm)	66 lb (30 kg)	1000' (305 m)	700' (213 m)	500' (152 m)	275' (84 m)	150' (46 m)

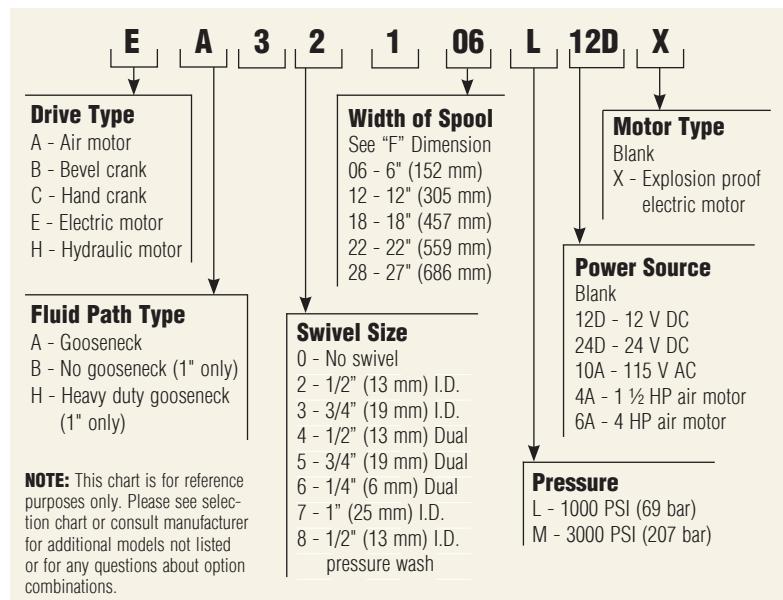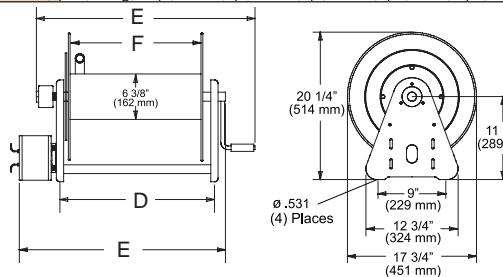

Model without hose	Shipping Weight		Hose I.D.		Hose O.D.		Capacity		Pressure		(F)NPTF Reel Outlet		(F)NPTF Reel Inlet		D		E		F	
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	in	in	mm	in	mm	in	mm	in
Hand Crank Hose Reels Temperature operating range from -20 °F (-29 °C) to +250 °F (121 °C)																				
CA32106 L	40	18	1/2	13	.750	19	100	30	1000	69	1/2	1/2	93/4	248	193/4	502	6	152		
CA32112 L	46	21	1/2	13	.750	19	200	61	1000	69	1/2	1/2	153/4	400	253/4	654	12	305		
CA32118 L	51	23	1/2	13	.750	19	325	99	1000	69	1/2	1/2	213/4	552	313/4	806	18	457		
CA32122 L	65	29	1/2	13	.750	19	400	122	1000	69	1/2	1/2	253/4	654	353/4	908	22	559		
CA32128 L	69	31	1/2	13	.750	19	500	152	1000	69	1/2	1/2	303/4	781	403/4	1035	27	686		
CA32106 M	42	19	1/2	13	.850	22	100	30	3000	207	1/2	1/2	93/4	248	193/4	502	6	152		
CA32112 M	46	21	1/2	13	.850	22	200	61	3000	207	1/2	1/2	153/4	400	253/4	654	12	305		
CA32118 M	52	24	1/2	13	.850	22	325	99	3000	207	1/2	1/2	213/4	552	313/4	806	18	457		
CA33106 L	41	19	3/4	19	1.075	27	50	15	1000	69	3/4	3/4	93/4	248	193/4	502	6	152		
CA33112 L	46	21	3/4	19	1.075	27	100	30	1000	69	3/4	3/4	153/4	400	253/4	654	12	305		
CA33118 L	51	23	3/4	19	1.075	27	175	53	1000	69	3/4	3/4	213/4	552	313/4	806	18	457		
CA33112 M	47	21	3/4	19	1.188	30	100	30	3000	207	3/4	3/4	153/4	400	253/4	654	12	305		
CA33118 M	51	23	3/4	19	1.188	30	175	53	3000	207	3/4	3/4	213/4	552	313/4	806	18	457		
CH37118 L*	64	29	1	25	1.375	35	100	30	1000	69	1	1	213/4	552	313/4	806	18	457		
CH37122 L*	73	33	1	25	1.375	35	125	38	1000	69	1	1	253/4	654	353/4	908	22	559		
CH37128 L*	77	35	1	25	1.375	35	150	46	1000	69	1	1	303/4	781	403/4	1035	27	686		
Bevel Crank Hose Reels Temperature operating range from -20 °F (-29 °C) to +250 °F (121 °C)																				
BA36112 L	57	26	1/4	6	Twin Welding		250	76	200	14	1/4	1/4	153/4	400	253/4	654	12	305		
BA34112 M	54	24	1/2	13	Twin Hydraulic		100	30	3000	207	1/2	1/2	153/4	400	253/4	654	12	305		
Electric Motor Driven Hose Reels Temperature operating range from -20 °F (-29 °C) to +250 °F (121 °C)																				
EA32106 L10A	61	28	1/2	13	.750	19	100	30	1000	69	1/2	1/2	93/4	248	195/8	498	6	152		
EA32112 L12D	64	29	1/2	13	.750	19	200	61	1000	69	1/2	1/2	153/4	400	237/8	606	12	305		
EA32118 L12D	68	31	1/2	13	.750	19	325	99	1000	69	1/2	1/2	213/4	552	295/8	752	18	457		
EA33112 L12D	68	31	3/4	19	1.075	27	100	30	1000	69	3/4	3/4	153/4	400	237/8	606	12	305		
EA33118 L12D	68	31	3/4	19	1.075	27	175	53	1000	69	3/4	3/4	213/4	552	295/8	752	18	457		
EA33112 M12D	71	32	3/4	19	1.188	30	100	30	3000	207	3/4	3/4	153/4	400	237/8	606	12	305		
EA33128 M12D	91	41	3/4	19	1.188	30	275	84	3000	207	3/4	3/4	303/4	781	385/8	981	27	686		
EA33112 M24D	71	32	3/4	19	1.188	30	100	30	3000	207	3/4	3/4	153/4	400	237/8	606	12	305		
EH37118 L12D*	82	37	1	25	1.375	35	100	30	300	21	1	1	213/4	552	31	787	18	457		
Air Motor Driven Hose Reels Filter, regulator, lubricator required. Temperature operating range from -20 °F (-29 °C) to +250 °F (121 °C)																				
AA32112 L4A	62	28	1/2	13	.750	19	200	61	1000	69	1/2	1/2	153/4	400	231/4	591	12	305		
AA33106 L4A	59	27	3/4	19	1.075	27	50	15	1000	69	3/4	3/4	93/4	248	171/4	438	6	152		
AA33112 L6A	68	31	3/4	19	1.075	27	100	30	1000	69	3/4	3/4	153/4	400	231/4	591	12	305		

All Series 30000 reels are supplied without hose. Assemblies quoted upon request. **CAUTION:** To prevent drum damage, fully extend and pressurize hose and rewind on the reel. For all metric thread connections over 1/2" add the suffix number 70 to indicate BSPT threads - example CA33112 M70. *All 1" reel models have an 8" (203 mm) diameter drum.

Many more reel models available in addition to chart. Please contact manufacturer for details.

Note: Weights listed are for crank driven. Add for power driven, electric - all explosion proof 45 lb. (20.41 kg); 12 V DC 1/3 HP 30 lb. (13.61 kg); Air 6 AM 36 lb. (16.33 kg). Capacity chart is reference only.

Customer Service: 1.855.634.9109
All Other Calls: 1.800.444.3134

 REELCRAFT®

Hose Reel Cart and Trailer | Series 30000

Portable Hose Reel and Cart



Made in USA

Hose Reel and Trailer

Reelcraft's rugged, self-contained hose reel trailer easily attaches to most off-road vehicles or carts and is pre-drilled 12" or 18" for Series 30000 hose reels. Reels hold up to 100' of 1" I.D. water hose.



Makes spot watering easier, quicker and more convenient. Applications include golf courses, athletic fields, sports turfs, grounds maintenance, parks and rec, agriculture and nurseries.

Hose Reel and Cart Packages

Package	Items Included
600965	12" hand crank hose reel (CA32112 L); 12" hand cart with pneumatic tires (600741-1); 10' inlet hose (600962)
600966	12" hand crank hose reel (CA32112 L); 12" hand cart with semi-pneumatic tires (600741-2); 10' inlet hose (600962)
600967	12" hand crank hose reel (CA33112 L); 12" hand cart with pneumatic tires (600741-1); 10' inlet hose (600963)
600968	18" hand crank hose reel (CB37118 L); 18" hand cart with pneumatic tires (600885-1); 10' inlet hose (S600982-10)

Additional Accessories

Battery box (battery not included): S600812
Battery cable connector: 600814

Chain guard: S600518

Hose: 1" ID x 100', 1" NPT x 1" NPSH: S600982-100

Hose: 3/4" ID x 150', 3/4" NPT x 1" NPSH: 601044-150

Inlet hose: 1" ID x 10', 1" NPT x 1" NPSH: S600982-10

Operating switch: S600808

Made in USA




Note: Refer to pages 24 and 25 for Series 30000 hose reel dimensions and specifications.


Hose Reel and Trailer Packages

Package	Items Included
600911	Trailer (600810); Hand rewind hose reel (CB37118 L); 10' lead hose (S600982-10); Roller bracket, top wind (S602133-3)
600910	Trailer (600810); 12 V DC Motor driven hose reel (EB37118 L12D); Switch, complete (S600808); Battery box, battery not included (S600812); Chain guard (S600518); Roller bracket, top wind (S602133-3); Roller bracket, bottom wind (S602132-3); 10' lead hose with 1" I.D. (S600982-10)
600810	Trailer only - does not include hose or reel. Reels designed for trailer include motor driven EB37118 L12D and hand crank CB37118 L. Trailer weight 154 lbs / 70 kg.

Trailer Dimensions

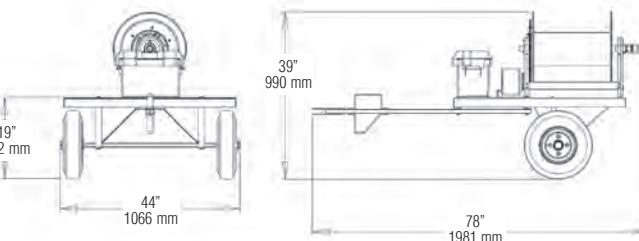

Trailer designed for off-road use only, not for passenger transport. Maximum weight capacity 400 pounds. Maximum speed 15 miles per hour. Trailer, reel and accessories sold separately.

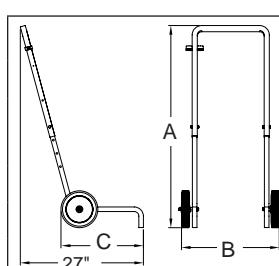

*Handle height of cart is adjustable to 35^{5/8}", 38^{5/8}", 41^{1/2}" or 44^{1/2}". Eight ^{5/16}" (8mm) diameter mounting holes.

Cart Size

Pneumatic	600741-1	600885-1
Semi-Pneumatic	600741-2	600885-2
	in	mm
A	Adjustable*	
B	23 ^{3/4} 603	28 ^{3/4} 730
C	18 ^{1/4} 464	18 ^{1/4} 464



Additional Series 30000 Accessories

S600812 Battery Box

Battery not included. Supplied with mounting hardware. Inside dimensions = 9" height x 14" width x 7^{1/2}" depth

600814 Battery Cable Connector

Battery not included.

See page 48 for switches, motors and chain guards, page 49 for inlet hoses and page 50 for replacement hoses.

Reelcraft's Reel Configurator

Large Frame Reels - Series 1200, 2400, 3900 & 3700

1/2" to 2" I.D.; hose lengths to 610' and more

Reelcraft's new reel configurator quickly and accurately quotes large frame reels. Simply answer a few questions about your reel needs and the configurator can instantly quote your reel. It will also create a 3D model from which a sales drawing and bill of material can be generated that can be sent out for your review. The new configurator allows for shorter lead times for large frame reels and increases the accuracy of the available combinations of reel options.

Improved response time

The configurator has greatly improved our response time to the customer. The traditional 2-3 day quote time has been reduced to only 20 minutes.

More accurate quotes

The configurator's rules based system eliminates incompatibilities and increases the accuracy of the available combinations of reel options. It will also create a 3D model from which a sales drawing and bill of material can be generated that can be sent out for your review.

Reduced product lead time

The improved response time and quote procedure have also decreased the product lead time. The standard 4-6 week product lead time can be reduced to a mere 2-3 weeks with most configured products.

Current capacity

The configurator currently covers 85% of the standard large frame reels sold and manufactured by Reelcraft with hose I.D.'s ranging from 1/2" to 2". More sizes will become available as released.

For an accurate quote, please advise:

1. Product to be handled such as air, oil, water, etc.
2. Maximum operating pressure in PSI.
3. Hose inside diameter (I.D.) and length.
4. Desired drive type such as hand crank, electric motor, air motor, etc.
5. Any special or additional accessories needed.

NOTE: Not all options are available in every combination. All large frame reels are supplied without hose. Reelcraft's configured reels and custom reels are built to order and not returnable.

Custom Capabilities

Don't see what you need? Reelcraft's engineered products group custom builds to your specifications.

- Very few size and weight constraints
- Special finishes / paint options
- Various drive types
- Wide range of pressures
- No minimum quantities



Series 1200 - 1/2", 3/4", 1" I.D.



Series 2400 - 1/2", 3/4", 1" I.D.



Series 3900 - 1", 1 1/4", 1 1/2" I.D.



Series 3700 - 2" I.D.

Large Frame Reels | Nordic Heavy Duty Solutions

Reelcraft's Engineered Product Solutions

Full Flow Design


The goose neck is contoured to match the drum diameter, which allows smooth hose wrapping and unimpeded flow.

Long Service Life

Swivel incorporates a permanently lubricated ball bearing.

Adjustable Hose Tension

The brake can be adjusted to suit the application requirements.

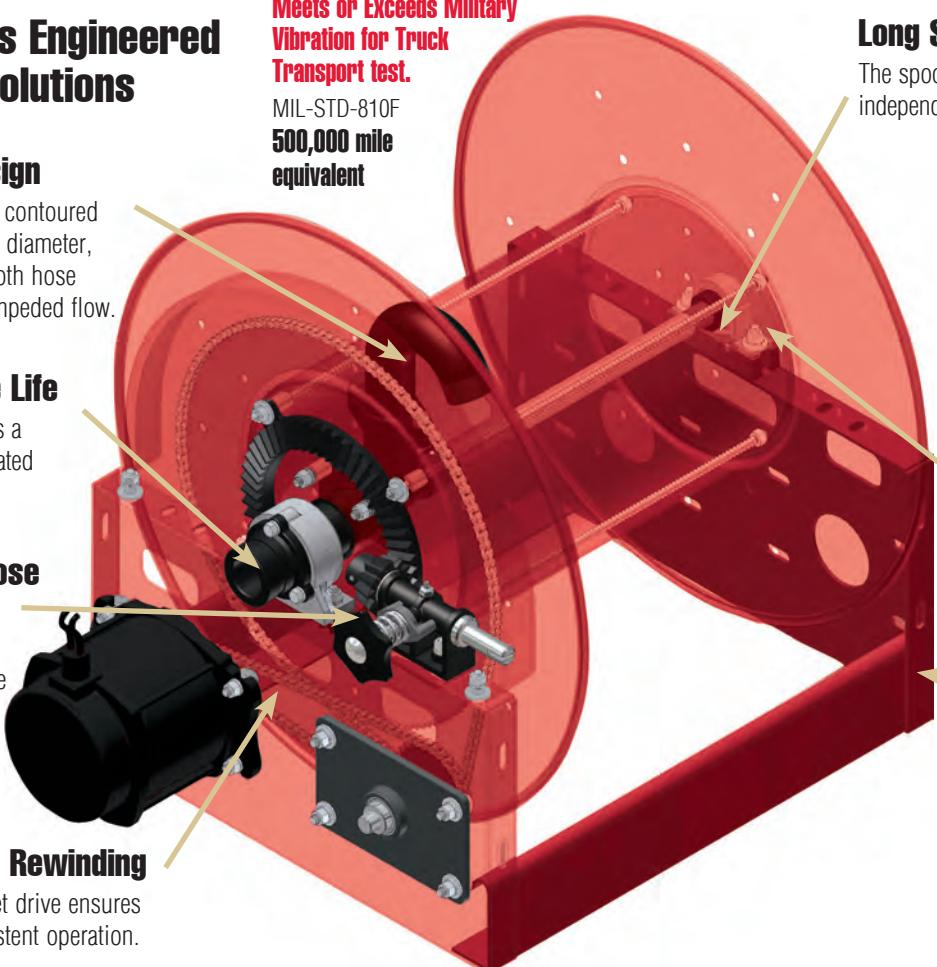

Meets or Exceeds Military Vibration for Truck Transport test.

MIL-STD-810F

500,000 mile equivalent

Long Service Life

The spool axial is supported by independent self-aligning bearing.

Free Rotation While Pressurized

The swing joint and spindle allows reel to freely rotate while fluid is pressurized.

Precise Rigid Construction

Proprietary unitized tie rods are zinc plated offering greater strength and resistance to vibration and corrosion.

Ultimate Corrosion Resistance

Individually powder coated components insure maximum coverage and resistance to corrosion. Stainless steel fasteners are standard.

Trouble-Free Rewinding

Chain and sprocket drive ensures smooth and consistent operation.

Drive Options	Series	Head Dia.	Drum Length	Thread Size	Inlet/Outlet Thread	Thread Style	Fluid Path Material	Pressure	Inlet Style	Fluid Path Location/Direction	Color Code
E 12 V DC	1200	19	6"-36" in 2" increments	50 1/2"	FM	Female In/ Male Out	NP NPT	A Aluminum	LP 0-600	1 Straight	R Red
NJ 24 V DC	2400	21		75 3/4"			BP BSPP	D Ductile Iron	1K 600-1000	2 90°	B Black
EP *12 V DC Exp	3900	23		10 1"	FF	Female In/Out	BT BSPT	S Stainless	3K 1000-3000	5 1" LPG	W White
EA *115 V AC Exp	3700	25		12 1 1/4"	MF	Male In/ Female Out			5K 3001-5000	1 Left Hand Top Wind	G Grey
EX *230 V AC Exp	5900	28		15 1 1/2"	MM	Male In/Out			6K 5001-6000	2 Left Hand Bottom Wind	S Silver
EJ *24 V DC Exp		31		20 2"					10K 10,000	3 Right Hand Top Wind	
HD Hydraulic		36		25 2 1/2"	VM	Grooved fitting In/Male Out			15K 15,000	4 Right Hand Bottom Wind	
AF 1 1/2 HP Air		39		30 3"							
AR 4 HP Air		46		40 4"	VF	Grooved fitting In/ Female Out					
BC Bevel Crank											
HC Hand Crank											
S Storage											
CR Cable Reel											
*Exp=Explosion proof motor											
Material Options/ Drive Size											
1/2" Pitch Chain	###5										
5/8" Pitch Chain	###6										
3/4" Pitch Chain	###7										
Gear Driven	###9										
Alum. Frame/Spool	##5#										
304 S.S. Frame/Spool	##9#										
316 S.S. Frame/Spool	##8#										
Sewer Cleaning Reel	##15										
Twin Hose	####T										
Additional Options											
Idler											
Chain Guard											
Roller Bracket (Top)											
Roller Bracket (Bottom)											
Inboard Motor											
Brake											
Auxiliary Bevel Crank											
Hose Boss (Guide)											
Junction Box											
Explosion Proof Switch											
Solenoid											
Circuit Breaker											
Control Valve											

Part No. Example: EP3900-23-28-15FFNPALP21-R00

EP(12VDC Electric Explosion Proof Motor)

3900(Series 3900 Hose Reel)

-23(23" Head Dia.) -28(28" Drum Length)

-15(1-1/2" Thread Size) FF(Female In/Out Thread Type)

NP(NPT Thread Style) A(Aluminum Fluid Path)

LP(0-600 PSI) 2(90° Inlet)

1(Left Hand Top Wind Fluid Path Location/Direction)

R(Red)

NOTE: Not all options available in every combination. Actual assigned part numbers will vary.

Please contact manufacturer for price and availability.

Large Frame Hose Reels | Nordic Series 1200

Heavy Duty Large Frame Reels

Nordic Series 1200

1" fluid path for 1/2" through 1" I.D. hose


Rewind: Direct crank rewind or chain and sprocket drive powered by A.C. or D.C. electric motor, compressed air motor or hydraulic motor. Crank is not supplied on power rewind models. A pin lock assembly is optional on manual rewind reels. A 3/8" pitch chain is standard.

Inlet: 1/2" up to 1" female/male NPT 90° swivel joint.

Straight swivel joint may be specified at extra cost.

Gooseneck: 1/2", 3/4", 1" female NPT. Other sizes and/or threads, including garden hose thread, can be furnished when specified.

The standard color for this series is red.

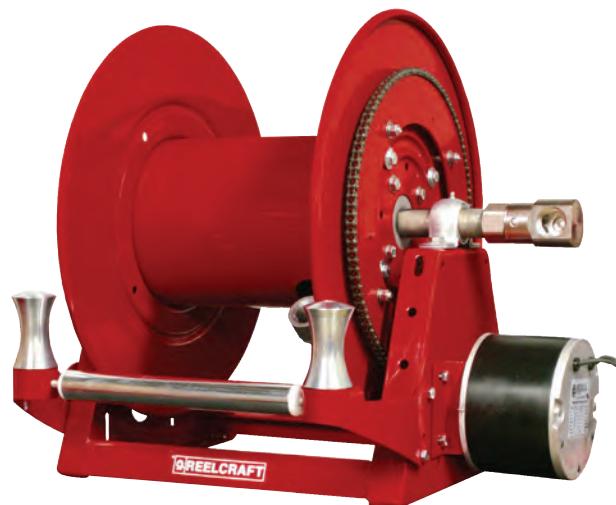


Shown with optional three-way roller bracket.

Nonexplosion-proof motor is standard "E" (pictured). Explosion proof (EP) motor is available upon request.



Built to order, not returnable.

Product temperatures range from -20 °F to +225 °F and standard pressures to 3000 psi. Other temperatures or pressures can be furnished at extra cost; consult manufacturer.

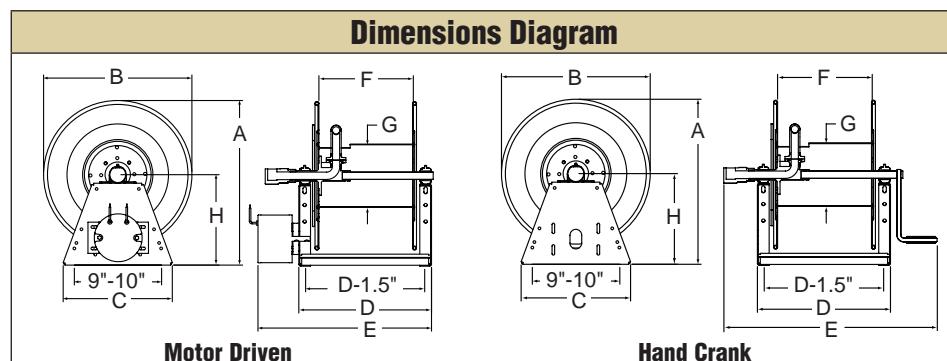

Hose I.D.	in	1/2	3/4	1	Specification - Hose Capacity and Reel Dimensions																
	mm	13	19	25	KEY: CRK = hand crank; "E" = nonexplosion-proof electric motor; EP = explosion-proof motor; AIR = air motor; BEVEL = bevel crank		A	B	C	D	E	CRK	E	EP	E	AIR	E	BEVEL	F	G	H
Hose O.D.	in	0.875	1.28	1.563		Weight	Weight	Weight													
Model		Hose Length			Crank*	Motor*	Bevel*														
1200-19-6	ft	120	40	35	41 LB	58 LB	48 LB	in	21.1	19	14	11	22	16.5	18.5	16	24	6	8	11.6	
	m	37	12	11	19 KG	26 KG	22 KG	mm	536	483	356	279	559	419	470	406	610	152	203	295	
1200-19-12	ft	255	95	80	43 LB	60 LB	50 LB	in	21.1	19	14	17	28	22.5	24.5	22	30	12	8	11.6	
	m	78	29	24	20 KG	27 KG	23 KG	mm	536	483	356	432	711	572	622	559	762	305	203	295	
1200-19-18	ft	395	145	125	44 LB	61 LB	51 LB	in	21.1	19	14	23	34	28.5	30.5	28	36	18	8	11.6	
	m	120	44	38	20 KG	28 KG	23 KG	mm	536	483	356	584	864	724	775	711	914	457	203	295	
1200-19-22	ft	490	180	160	45 LB	62 LB	52 LB	in	21.1	19	14	27	38	32.5	34.5	32	40	22	8	11.6	
	m	149	55	49	20 KG	28 KG	24 KG	mm	536	483	356	686	965	826	876	813	1016	559	203	295	
1200-19-28	ft	630	220	190	46 LB	63 LB	53 LB	in	21.1	19	14	33	44	38.5	40.5	38	46	28	8	11.6	
	m	192	67	58	21 KG	29 KG	24 KG	mm	536	483	356	838	1118	978	1029	965	1168	711	203	295	
1200-23-6	ft	145	70	40	49 LB	66 LB	56 LB	in	25.1	23	15.25	11	22	16.5	18.5	16	24	6	11.25	13.6	
	m	44	21	12	22 KG	30 KG	25 KG	mm	638	584	387	279	559	419	470	406	610	152	286	345	
1200-23-12	ft	315	160	100	51 LB	68 LB	58 LB	in	25.1	23	15.25	17	28	22.5	24.5	22	30	12	11.25	13.6	
	m	96	49	30	23 KG	31 KG	26 KG	mm	638	584	387	432	711	572	622	559	762	305	286	345	
1200-23-18	ft	490	250	155	52 LB	69 LB	59 LB	in	25.1	23	15.25	23	34	28.5	30.5	28	36	18	11.25	13.6	
	m	149	76	47	24 KG	31 KG	27 KG	mm	638	584	387	584	864	724	775	711	914	457	286	345	
1200-23-22	ft	610	300	195	53 LB	70 LB	60 LB	in	25.1	23	15.25	27	38	32.5	34.5	32	40	22	11.25	13.6	
	m	186	91	59	24 KG	32 KG	27 KG	mm	638	584	387	686	965	826	876	813	1016	559	286	345	
1200-23-28	ft	780	370	240	54 LB	71 LB	61 LB	in	25.1	23	15.25	33	44	38.5	40.5	38	46	28	11.25	13.6	
	m	238	113	73	24 KG	32 KG	28 KG	mm	638	584	387	838	1118	978	1029	965	1168	711	286	345	

Refer to page 28 to build a representative model number. Final part number assigned upon quote. Refer to chart on page 31 for weight adders.

Reelcraft's reel configurator can quickly and accurately quote standard large frame reels.

Refer to page 27 for more information.

Large Frame Hose Reels | Nordic Series 2400

Heavy Duty Large Frame Reels

Nordic Series 2400

1/2", 3/4" or 1" fluid path for 1/2" through 1" I.D. hose

Rewind: Gear-drive rewind or chain and sprocket drive powered by A.C. or D.C. electric motor, compressed air motor or hydraulic motor.

Inlet: 1/2" up to 1" female/male NPT 90° swivel joint.

Straight swivel joint may be specified at extra cost.

Gooseneck: 1/2" up to 1" female/male NPT. Other sizes and/or threads, including male NST and male garden hose thread, can be furnished when specified.

Product temperatures from -20 °F to +225 °F and standard pressures to 3000 psi. Reels to operate at other temperatures or pressures can be furnished at extra cost, consult manufacturer. The standard color for this series is red or gray. Add 12" to B dimension when crank is in rewind position.



Shown with optional bevel crank.

1/2" pitch chain
now standard


Made in USA 

Fire Service / Booster Reels

The **aluminum Series 2450** reel for booster hose is corrosion-resistant and weighs up to 50% less than standard steel booster reels. Features include an aluminum spool and frame assembly, plated steel fluid path and plated sprocket and fasteners. **No painting or finishing is required.**



Built to order, not returnable.

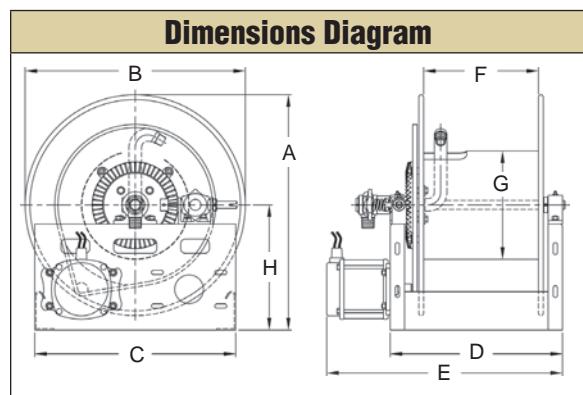

Hose I.D.	in mm	1/2 13	3/4 19	1 25	Specification - Hose Capacity and Reel Dimensions															
Hose O.D.	in mm	.875 22	1.281 33	1.563 40	KEY: CRK = hand crank; ELC = electric motor; HYD = hydraulic motor; AIR = air motor															
Model	Hose Length (other std. lengths available)				Est. Weight		A	B CRK	B ELC	B AIR	B HYD	C	D	E CRK	E ELC	E AIR	E HYD	F	G	H
2400-19-16	ft m	285 87	110 34	60 18	70 LB 32 KG	in mm	22.5 572	21 533	21 533	21 533	21 533	21 533	22 559	26 660	29 737	28 711	28 711	16 406	11.25 286	13 330
2400-23-14	ft m	390 119	175 53	110 34	74 LB 34 KG	in mm	24.5 622	23 584	23 584	23 584	23 584	21 533	20 508	24 610	27 686	26 660	26 660	14 356	11.25 286	13 330
2400-23-18	ft m	490 149	250 76	155 47	78 LB 35 KG	in mm	24.5 622	23 584	23 584	23 584	23 584	21 533	21 610	24 711	28 787	31 762	30 762	18 457	11.25 286	13 330
2400-23-20	ft m	535 163	265 81	170 52	80 LB 36 KG	in mm	24.5 622	23 584	23 584	23 584	23 584	21 533	21 660	26 762	30 838	33 813	32 813	20 508	11.25 286	13 330
2400-23-24	ft m	660 201	320 98	210 64	84 LB 38 KG	in mm	24.5 622	23 584	23 584	23 584	23 584	21 533	21 762	30 864	34 940	37 914	36 914	24 610	11.25 286	13 330
2400-25-8	ft m	265 81	135 41	95 29	72 LB 33 KG	in mm	26.5 673	25 635	25 635	25 635	25 635	21 533	14 536	18 457	21 533	20 508	20 508	8 203	11.25 286	14 356
2400-25-14	ft m	465 142	225 69	150 46	74 LB 34 KG	in mm	26.5 673	25 635	25 635	25 635	25 635	21 533	20 508	24 610	27 686	26 660	26 660	14 356	11.25 286	14 356
2400-31-8	ft m	465 142	205 62	155 47	74 LB 34 KG	in mm	32.5 826	31 787	31 787	31 787	31 787	24 610	24 406	14 508	18 533	21 508	20 203	8 203	11.25 286	17 432
2400-31-10	ft m	565 172	240 73	185 56	76 LB 34 KG	in mm	32.5 826	31 787	31 787	31 787	31 787	24 610	24 406	16 508	22 584	22 559	22 559	10 254	11.25 286	17 432
2400-31-16	ft m	925 282	410 125	305 93	80 LB 36 KG	in mm	32.5 826	31 787	31 787	31 787	31 787	24 610	22 559	26 660	29 737	28 711	28 711	16 406	11.25 286	17 432

Refer to page 28 to build a representative model number. Final part number assigned upon quote. Refer to chart on page 31 for weight adders.

Reelcraft's reel configurator can quickly and accurately quote standard large frame reels.

Refer to page 27 for more information.

Heavy Duty Large Frame Reels

Nordic Series 3900

1 1/2" fluid path for 1" through 1 1/2" I.D. hose

Rewind: Gear-drive rewind or chain and sprocket drive powered by A.C. or D.C. electric motor, compressed air motor or hydraulic motor.

Inlet: 2" straight grooved fitting with 1 1/2" female NPT straight swivel joint is standard. 2" 90° grooved fitting with 1 1/2" NPT female available at extra cost.

Gooseneck: 1", 1 1/4" and 1 1/2" female/male NPT outlet. Other sizes and/or threads can be furnished and must be specified.

Add 12" to B dimension when crank is in rewind position.

The standard color for this series is red or gray.

Made
in USA




**1/2" pitch chain
now standard**

Shown with optional
bevel crank.

Built to order, not returnable.

Standard seals maximum temperature 174 °F (79 °C) and minimum temperature -20 °F (-29 °C). Extreme temperature seals maximum temperature 400 °F (204 °C) and minimum temperature -50 °F (-45 °C) and standard pressures to 600 psi. Other temperatures or pressures can be furnished at extra cost, consult manufacturer.

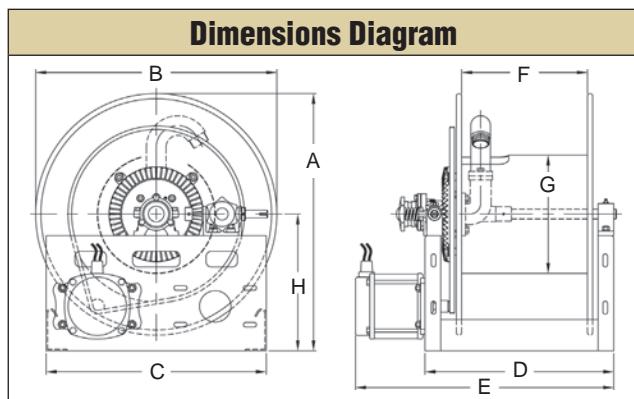

Note: Weights shown in chart
are for crank rewind models.

Add these amounts and model
number prefix for power rewind
models.

Prefix	Type	LB / KG
EP	Electric	42 / 19
A	Air	26 / 12
H	Hyd	26 / 12

Hose I.D.	in mm	Hose Length				Est. Weight	Specification - Hose Capacity and Reel Dimensions													
		1 25	1 1/4 32	1 3/8 35	1 1/2 38		A	B CRK	B ELC	B AIR	B HYD	C	D	E CRK	E ELC	E AIR	E HYD	F	G	H
3900-19-16	ft m	60 18	50 15	50 15	45 14	90 LB 41 KG	in mm	22.5 572	21 533	21 533	21 533	21 533	22 559	26 660	29 737	28 711	28 711	16 406	11.25 286	13 330
3900-19-20	ft m	70 21	65 20	60 18	55 17	93 LB 42 KG	in mm	22.5 572	21 533	21 533	21 533	21 533	26 660	30 762	33 838	32 813	32 813	20 508	11.25 286	13 330
3900-23-12	ft m	100 30	60 18	60 18	50 15	87 LB 39 KG	in mm	24.5 622	23 584	23 584	23 584	21 533	18 457	22 559	25 635	24 610	24 610	12 305	11.25 286	13 330
3900-23-18	ft m	155 47	90 27	95 29	85 26	93 LB 42 KG	in mm	24.5 622	23 584	23 584	23 584	21 533	24 610	28 711	31 787	30 762	30 762	18 457	11.25 286	13 330
3900-23-20	ft m	170 52	110 34	105 32	95 29	95 LB 42 KG	in mm	24.5 622	23 584	23 584	23 584	21 533	26 660	30 762	33 838	32 813	32 813	20 508	11.25 286	13 330
3900-23-26	ft m	225 69	140 43	135 41	125 38	100 LB 45 KG	in mm	24.5 622	23 584	23 584	23 584	21 533	32 813	36 914	39 991	38 965	38 965	26 660	11.25 286	13 330
3900-23-28	ft m	240 73	150 46	145 44	135 41	103 LB 47 KG	in mm	24.5 622	23 584	23 584	23 584	21 533	34 864	38 965	41 1041	40 1016	40 1016	28 711	11.25 286	13 330
3900-23-36	ft m	325 99	190 58	185 56	180 55	111 LB 50 KG	in mm	24.5 622	23 584	23 584	23 584	21 533	42 1067	46 1168	49 1245	48 1219	48 1219	36 914	11.25 286	13 330
3900-25-12	ft m	135 41	90 27	60 18	50 15	89 LB 40 KG	in mm	26.5 673	25 635	25 635	25 635	21 533	18 457	22 559	25 635	24 610	24 610	12 305	11.25 286	14 356
3900-25-20	ft m	230 70	160 49	105 32	95 29	97 LB 44 KG	in mm	26.5 673	25 635	25 635	25 635	21 533	26 660	30 762	33 838	32 813	32 813	20 508	11.25 286	14 356
3900-31-12	ft m	215 66	155 47	125 38	105 32	92 LB 42 KG	in mm	32.5 826	31 787	31 787	31 787	24 610	18 457	22 559	25 635	24 610	24 610	12 305	11.25 286	17 432
3900-31-16	ft m	305 93	210 64	170 52	150 46	96 LB 44 KG	in mm	32.5 826	31 787	31 787	31 787	24 610	559 660	26 737	29 711	28 711	28 711	16 406	11.25 286	17 432
3900-31-20	ft m	365 111	290 88	210 64	190 58	100 LB 45 KG	in mm	32.5 826	31 787	31 787	31 787	24 610	26 660	30 762	33 838	32 813	32 813	20 508	11.25 286	17 432

Refer to page 28 to build a representative model number. Final part number assigned upon quote.

Reelcraft's reel configurator can quickly and accurately quote standard large frame reels.

Refer to page 27 for more information.

Liquid Propane Reels | Nordic Series 3900 LPG / 80000 / D80000

Heavy Duty Large Frame Reels

Nordic Series 3900 LPG

1 1/2" or 2" fluid path for 1" through 2" I.D. hose


Rewind: Gear-drive or chain and sprocket drive powered by explosion proof A.C. or D.C. electric motor, compressed air motor or hydraulic motor.

Inlet: Full Circle® UL approved swivels available in 1", 1 1/2" and 2" as standard.

Now available in
polished aluminum

Hose Boss (optional accessory)



The Hose Boss Rewind Assist consists of a rewind switch mounted in an extended arm with two hose rollers. Assists in efficiently and safely unwinding and rewinding hose.

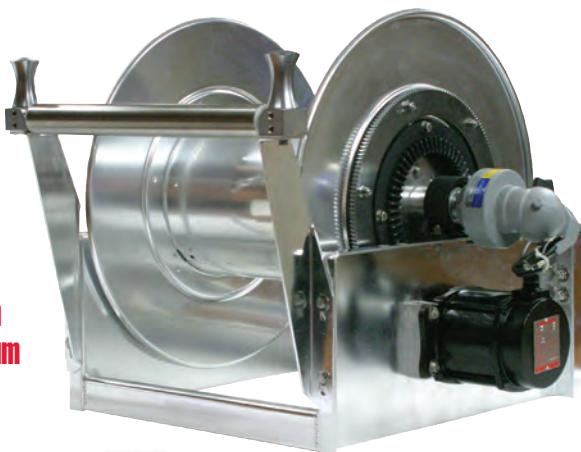

Made
in USA



Inset: Nordic Series 3900 LPG with optional Hose Boss

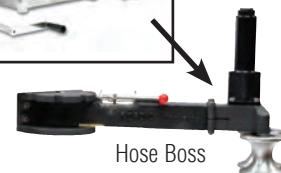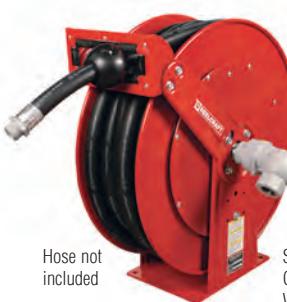

Hose Boss

Heavy Duty Spring Retractable Reels

Series 80000/D80000 - 1/2", 3/4", 1" I.D.

OPTIONS		LP82000 OL□									
		Flange/End Plate Material									
		S Stainless Steel P Carbon Steel									

Choose a reel model from the chart below, then use the suffix codes below to choose a flange/end plate material.

Hose not included
Series 80000
Carbon steel
With Full Circle® swivel

Model without hose	Hose I.D.	Hose O.D.	Capacity	Pressure	Weight	A	B	C	D	E	F
	in mm	in mm	ft m	psi bar	lbs kg	in mm	in mm	in mm	in mm	in mm	in mm
Series 80000 / D80000: Spring Driven Reels											
LP82000 OL□*	1/2 25	.845 32	21 30	300 21	82 37	25 645	24 610	10 254	6 152	15 391	8 206
LP83000 OL□*	3/4 19	1.188 30	50 15	350 24	82 37	25 645	24 610	10 254	6 152	15 391	8 206
LPD83000 OL□*	3/4 19	1.188 30	75 23	350 24	77 35	25 645	24 610	10 1/2 267	7 7/8 200	17 3/4 451	10 3/8 264
LPD84000 OL□*	1 25	1.500 38	50 15	350 24	77 35	25 645	24 610	10 1/2 267	7 7/8 200	17 7/8 454	10 3/8 264

*Choose flange/end plate material from charts above. Refer to page 13 for dimension chart.

Hose I.D.	in mm	1 1/4 25	1 1/2 32	2 51		Specification - Hose Capacity and Reel Dimensions							
	in mm	1.563 40	1.813 46	2.063 52		Refer to chart on page 31 for Series 3900 LPG dimensions.							
Model	Hose Length				Est. Weight	A	B	C	D	E	F	G	H
3900-19-20	ft m	70 21	65 20	55 17	103 LB 47 KG	in mm	22.5 572	21 533	21 660	26 838	33 508	20 286	11.25 330
3900-23-16	ft m	140 43	80 24	75 23	100 LB 45 KG	in mm	24.5 622	23 584	21 533	22 559	29 737	16 406	11.25 330
3900-23-20	ft m	170 52	110 34	95 29	105 LB 48 KG	in mm	24.5 622	23 584	21 533	26 660	33 838	20 508	11.25 330
3900-23-24	ft m	210 64	130 40	115 35	110 LB 50 KG	in mm	24.5 622	23 584	21 533	30 762	37 940	24 610	11.25 330
3900-25-14	ft m	150 46	105 32	65 20	102 LB 46 KG	in mm	26.5 673	25 635	21 533	20 508	27 686	14 356	11.25 356
3900-25-18	ft m	210 64	135 41	85 26	105 LB 48 KG	in mm	26.5 673	25 635	21 533	24 610	31 787	18 457	11.25 356
3900-23-26	ft m			95 29	35 51 LG	in mm	24.5 622	23 584	21 533	32 813	39 991	26 660	15 381
3900-31-12	ft m			95 29	55 11	in mm	32.5 826	31 787	24 610	18 457	25 635	12 305	15 432
3900-31-22	ft m			185 56	110 34	in mm	32.5 826	31 787	24 610	28 711	35 889	22 559	15 432

Refer to page 28 to build a representative model number including LPG swivel. Refer to charts on page 13 and 31 for dimensions.

Built to order, not returnable.

Large Frame Hose Reels | Nordic Series 3700 / 5900

Heavy Duty Large Frame Reels

Nordic Series 3700 & 5900

2", 3" or 4" fluid path for 11/2" through 4" I.D. hose

Rewind: Gear-drive crank rewind or chain and sprocket drive powered by A.C. or D.C. electric motor, compressed air motor or hydraulic motor.

Inlet: 2" (Series 3700) / 3" (Series 5900) straight grooved fitting is standard. 4" (Series 5900) 90° grooved fitting and 24" diameter drum is standard. 90° grooved fitting swivel joint available at extra cost.

Gooseneck: 2" (Series 3700) / 3" (Series 5900) / 4" (Series 5900) female NPT. Other sizes and/or threads can be furnished and must be specified.

Series 5900 product temperatures from -50 °F to +400 °F and standard pressures to 300 psi. Series 3700 standard seals maximum temperature 174 °F (79 °C) and minimum temperature -20 °F (-29 °C). Extreme temperature seals maximum temperature 400 °F (204 °C) and minimum temperature -50 °F (-45 °C).

1/2" pitch chain
now standard



Nordic Series 3700
Shown with optional
bevel crank.



Nordic Series 5900
Shown with optional
bevel crank.

Standard pressures to 300 psi. Other temperatures or pressures can be furnished at extra cost, consult manufacturer. The standard color for this series is red or gray. Add 12" to B dimension when crank is in rewind position.

Built to order, not returnable.

Specification - Hose Capacity and Reel Dimensions

KEY: CRK = hand crank; ELC = electric motor; HYD = hydraulic motor; AIR = air motor

Hose I.D.	in	1 1/2	2	2 1/2	3	4															
	mm	38	51	64	76	102															
Hose O.D.	in	2.063	2.563	3.188	3.75	4.75	mm														
Model	Hose Length				Est. Weight																
						A	B														
						CRK	ELC														
3700-23-20	ft	70	25			114 LB	in	24.5	23	23	23	23	21	26	30	33	32	32	20	15	13
	m	21	8			52 KG	mm	622	584	584	584	584	533	660	762	838	813	813	508	381	330
3700-25-20	ft	70	55			124 LB	in	26.5	25	25	25	25	21	26	30	33	32	32	20	15	14
	m	21	17			56 KG	mm	673	635	635	635	635	533	660	762	838	813	813	508	381	356
3700-25-24	ft	85	75			128 LB	in	26.5	25	25	25	25	21	30	34	37	36	36	24	15	14
	m	26	23			58 KG	mm	673	635	635	635	635	533	762	864	940	914	914	610	381	356
3700-25-32	ft	115	100			136 LB	in	26.5	25	25	25	25	21	38	42	45	44	44	32	15	14
	m	35	30			62 KG	mm	673	635	635	635	635	533	965	1067	1143	1118	1118	813	381	356
3700-31-12	ft	95	55			134 LB	in	32.5	31	31	31	31	24	18	22	25	24	24	12	15	17
	m	29	17			61 KG	mm	826	787	787	787	787	610	457	559	635	610	610	305	381	432
3700-31-20	ft	170	95			142 LB	in	32.5	31	31	31	31	24	26	30	33	32	32	20	15	17
	m	52	29			64 KG	mm	826	787	787	787	787	610	660	762	838	813	813	508	432	
3700-31-26	ft	225	135			148 LB	in	32.5	31	31	31	31	24	32	36	39	38	38	26	15	17
	m	69	41			67 KG	mm	826	787	787	787	787	610	813	914	991	965	965	660	381	432
3700-39-16	ft	230	165			182 LB	in	40.5	39	39	39	39	24	22	26	29	28	28	16	15	21
	m	70	50			83 KG	mm	1029	991	991	991	991	610	559	660	737	711	711	406	381	533
3700-39-24	ft	360	250			190 LB	in	40.5	39	39	39	39	24	30	34	37	36	36	24	15	21
	m	110	76			86 KG	mm	1029	991	991	991	991	610	762	864	940	914	914	610	381	533
5900-31-16	ft	60	25	20		140 LB	in	32.5	31	31	31	31	24	22	26	29	28	28	16	20	17
	m	18	8	6		64 KG	mm	826	787	787	787	787	610	559	660	737	711	711	406	508	432
5900-31-24	ft	90	35	30		150 LB	in	32.5	31	31	31	31	24	30	34	37	36	36	24	20	17
	m	27	11	9		68 KG	mm	826	787	787	787	787	610	762	864	940	914	914	610	508	432
5900-31-32	ft	125	50	40		160 LB	in	32.5	31	31	31	31	24	38	42	45	44	44	32	20	17
	m	38	15	12		73 KG	mm	826	787	787	787	787	610	965	1067	1143	1118	1118	813	508	432
5900-36-12	ft	65	30	35		146 LB	in	37.5	36	36	36	36	24	18	22	25	24	24	12	20	21
	m	20	9	11		66 KG	mm	953	914	914	914	914	610	457	559	635	610	610	305	508	533
5900-36-16	ft	100	55	45	15	150 LB	in	37.5	36	36	36	36	24	22	26	29	28	28	16	20	21
	m	30	17	14	5	68 KG	mm	953	914	914	914	914	610	559	660	737	711	711	406	508	533
5900-39-12	ft	95	55	35	25	180 LB	in	40.5	39	39	39	39	24	18	22	25	24	24	12	20	21
	m	29	17	11	8	82 KG	mm	1029	991	991	991	991	610	457	559	635	610	610	305	508	533
5900-39-16	ft	145	90	45	35	200 LB	in	40.5	39	39	39	39	24	22	26	29	28	28	16	20	21
	m	44	27	14	11	91 KG	mm	1029	991	991	991	991	610	559	660	737	711	711	406	508	533
5900-39-24	ft	220	125	65	60	210 LB	in	40.5	39	39	39	39	24	30	34	37	36	36	24	20	21
	m	67	38	20	18	95 KG	mm	1029	991	991	991	991	610	762	864	940	914	914	610	508	533

Refer to page 28 to build a representative model number. Final part number assigned upon quote. Refer to chart on page 31 for weight adders.

Reelcraft's reel configurator can quickly and accurately quote standard large frame reels.

Refer to page 27 for more information.

Large Frame Hose Reels | Nordic Series 3800

Heavy Duty Large Frame Reels Petroleum Service


1 1/2" or 2" fluid path for 1 1/4" through 2" I.D. hose

Rewind: Chain and sprocket drive powered by A.C. or D.C. electric motor, compressed air motor or hydraulic motor. 30° manual rewind assembly available at extra cost.


Inlet: 90° 2" grooved fitting is standard. Straight swivel joints may be specified at no extra cost.

Gooseneck: 1 1/4", 1 1/2" or 2" female/male NPT is available. Specify male or female fitting and hose size when ordering.

Brakes and locks: Manual friction brake and air operated caliper brake are standard.

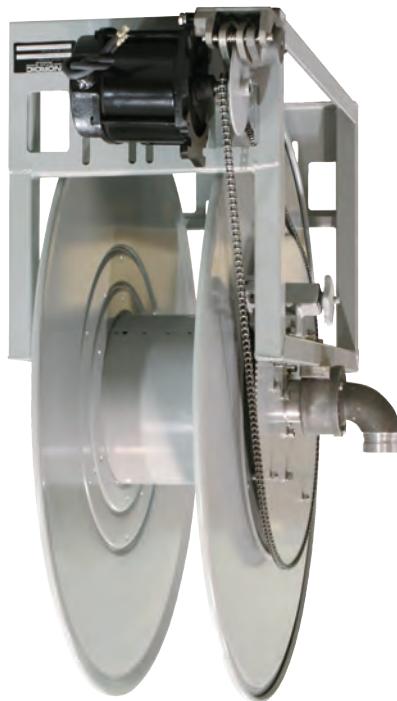

Dimensions Diagram

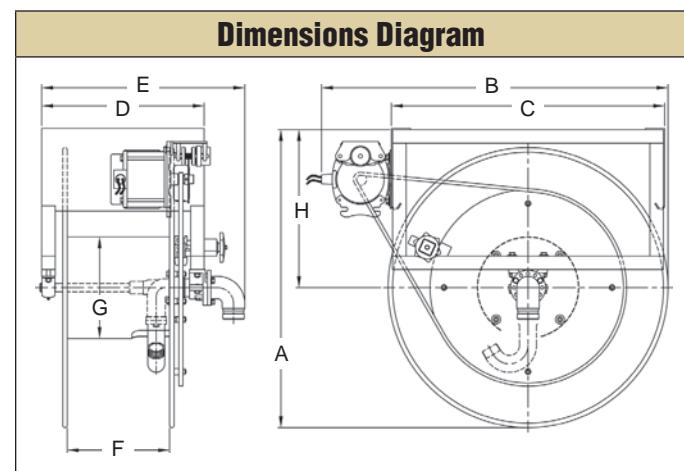

Made
in USA 

Standard seals maximum temperature 174 °F (79 °C) and minimum temperature -20 °F (-29 °C). Extreme temperature seals maximum temperature 400 °F (204 °C) and minimum temperature -50 °F (-45 °C). Standard pressures to 300 psi. Other temperatures or pressures can be furnished at extra cost; consult manufacturer. The standard color for this series is red or gray.

Hose I.D.	in	1 1/4	1 3/8	1 1/2	2		Specification - Hose Capacity and Reel Dimensions								
Hose O.D.	in	32	35	38	51										
Model	Hose Length					Est. Weight		A	B	C	D	E	F	G	H
3800-31-10	ft	130	105	85		174 LB	in	33	38.5	30	16	20.25	10	11.25	17.5
	m	40	32	26		79 KG	mm	838	978	762	406	514	254	286	445
3800-31-12	ft	155	125	105		176 LB	in	33	38.5	30	18	22.25	12	11.25	17.5
	m	47	38	32		80 KG	mm	838	978	762	457	565	305	286	445
3800-31-16	ft	210	170	150		180 LB	in	33	38.5	30	22	26.25	16	11.25	17.5
	m	64	52	46		82 KG	mm	838	978	762	559	667	406	286	445
3800-39-7	ft	120	105	105		212 LB	in	41	43.5	32	13	17.25	17	11.25	21.5
	m	37	32	32		96 KG	mm	1041	1105	813	330	438	432	286	546
3800-39-9	ft	160	140	140		214 LB	in	41	43.5	32	15	19.25	9	11.25	21.5
	m	49	43	43		97 KG	mm	1041	1105	813	381	489	229	286	546
3800-39-11	ft	240	175	175		216 LB	in	41	43.5	32	17	21.25	11	11.25	21.5
	m	73	53	53		98 KG	mm	1041	1105	813	432	540	279	286	546
3800-31-13	ft	170	110	110	70	178 LB	in	33	38.5	30	19	24.5	13	15	17.5
	m	52	34	34	21	81 KG	mm	838	978	762	483	622	330	381	445
3800-39-12	ft	230	195	165	110	218 LB	in	41	43.5	32	18	23.5	12	15	21.5
	m	70	59	50	34	99 KG	mm	1041	1105	813	457	597	305	381	546
3800-39-16	ft	305	255	230	165	224 LB	in	41	43.5	32	22	27.5	16	15	21.5
	m	93	78	70	50	102 KG	mm	1041	1105	813	559	699	406	381	546

Refer to page 28 to build a representative model number. Final part number assigned upon quote.

Built to order, not returnable.

Heavy Duty Single Wrap Reels

Petroleum / Aviation Fuel Service

1½", 2" or 3" fluid path for 13/8" through 3" I.D. hose

Rewind: Chain and sprocket drive powered by A.C. or D.C. electric motor, compressed air motor or hydraulic motor.

Inlet: 2" grooved fitting is standard for 1" through 2" ID hose. 3" grooved fitting is standard for 2½" and 3" ID hose. 1½", 2" and 3" NPT or BSPP available. 90° inlets available.

Gooseneck: 1½", 2" and 3" NPT or BSPP. Specify male or female threads for gooseneck.

Brakes and locks: Air operated caliper brake and idler assembly is standard. Manual friction brake optional.

Materials: Standard frame and spool assembly are made of heavy duty steel construction. Also available in aluminum. The standard color for this series is red or gray.

Operating pressure: 300 psi maximum. Reels to operate at other pressure ratings available at extra cost. Consult manufacturer.

Operating temperatures: Maximum 400 °F (204 °C) / minimum -50 °F (-46 °C). Reels that are to operate at other temperature ratings are available at extra cost, consult manufacturer.


Hose I.D.	in	1 3/8	1 1/2	2	2 1/2	3					
	mm	35	38	51	64	76					
Hose O.D.	in	2.000	2.063	2.563	3.063	3.750					
	mm	51	52	65	81	95					
Model	Hose Length					A	B	C	H		
6000-47	ft	55	50	30	25	20	in	48.5	47	38.5	25
	m	17	15	9	8	6	mm	1232	1194	978	635
6000-55	ft	80	75	50	40	35	in	55.75	55	38.5	28.25
	m	24	23	15	12	11	mm	1416	1397	978	718
6000-62	ft	100	100	70	50	50	in	62.75	62	38.5	31.75
	m	30	30	21	15	15	mm	1594	1575	978	806
6000-68	ft	125	120	85	70	60	in	68.75	68	38.5	34.75
	m	38	37	26	21	18	mm	1746	1727	978	883
6000-72	ft	150	140	100	80	70	in	72.75	72	38.5	36.75
	m	46	43	30	24	21	mm	1848	1829	978	933

Hose I.D.	Dimensions			
	D	E	F	G*
	in	mm	in	mm
1 3/8"	12	305	18.5	470
	in	mm	in	mm
1 1/2"	12	305	18.5	470
	in	mm	in	mm
2"	12	305	18.5	470
	in	mm	in	mm
2 1/2"	13	330	19.5	495
	in	mm	in	mm
3"	14	356	20.5	521
	in	mm	in	mm


*Drum diameter conforms to API 1529 Appendix A.

Model numbers are representative. Final part number assigned upon quote.

Built to order, not returnable.

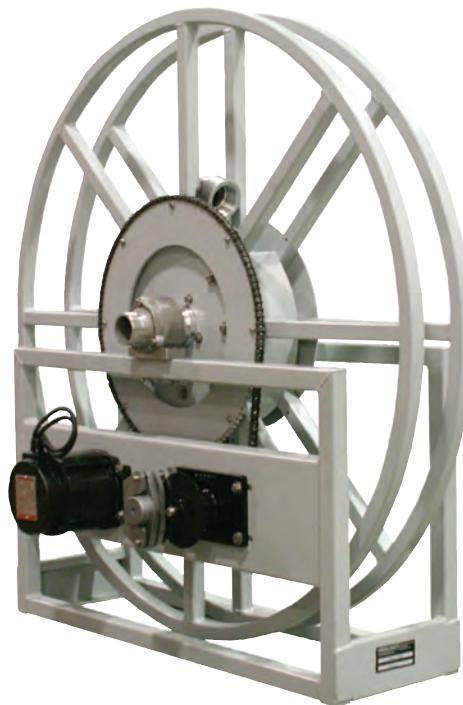


Made
in USA

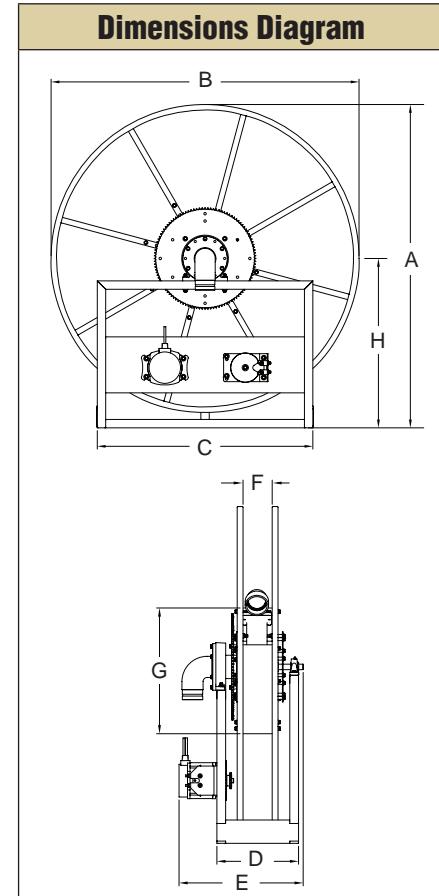

Light/Medium Duty Cord Reels | Series LD / LG / LH

Light/Medium Duty Cord Reels

Reelcraft's new line of light and medium duty cord reels are designed for less strenuous applications in which a capable and long-lasting reel is required. The reels accommodate lengths of 16/3, 14/3, 12/3, and 10/3 diameter cable.

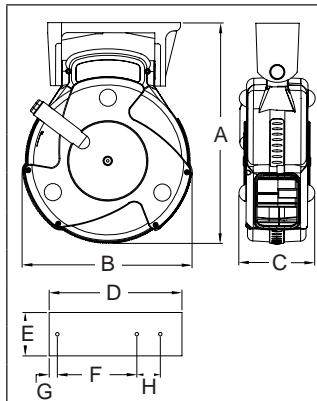

Dimensions - Size Index								
	1		2		3		4	
	in	mm	in	mm	in	mm	in	mm
A	11 ⁷ / ₈	302	15 ¹ / ₄	387	13 ³ / ₄	349	17 ³ / ₄	451
B	9 ¹ / ₄	235	11 ¹ / ₂	292	11	279	17 ¹ / ₄	438
C	3 ³ / ₄	95	5	127	8 ³ / ₄	222	11 ¹ / ₈	283
D	2 ³ / ₄	98	9 ³ / ₁₆	233	1/4" mounting holes. If reels are to be mounted more than 15' overhead, consult manufacturer.			
E	2	51	3	76				
F	17 ¹ / ₈	48	5 ¹ / ₂	139				
G	7 ¹ / ₁₆	11	9 ¹ / ₁₆	14				
H	N/A		1 ⁵ / ₈	41				

Series LD Cord Reels

Designed for overhead mounting, these reels are compact, feature a powder coated steel housing, adjustable cable stop and a resettable circuit breaker.

Model with Cord	Cord Ending	Cord Specifications					Volts	Amps	Weight	Size Index
		AWG	mm	# Cond	ft	m	Type			
LD2040 163 2*	Style 2	16	1.33	3	40	12	SJTW	120	0.3	11 5 1
LD2030 163 9	Style 9	16	1.33	3	30	9	SJTW	125	10	8 4 1
LD2030 143 9	Style 9	14	2.08	3	30	9	SJTW	125	13	9 4 1

*Requires a minimum of five feet hanging cable (outside reel). Designed for ceiling mount.

Cord Options	
	Style #2 13 watt fluorescent light features a durable shock-resistant lamp holder and shatter-resistant tube with switch.
	Style #8 13 watt fluorescent light features an on/off switch on the handle and an outlet.
	Style #9 Triple outlet with grounded receptacles. For maximum ratings, consult manufacturer.



Series LG Hand Crank Reels

Designed with the contractor in mind, Series LG medium duty hand crank reels are portable and deliver power where and when it is necessary. They feature four circuit breaker protected outlets and a corrosion resistant powder coating.

Model with Cord*	Cord Ending	Cord Specifications					Volts	Amps	Weight	Size Index
		AWG	mm	# Cond	ft	m	Type			
LG3050 163 8*	Style 8	16	1.33	3	50	15	SJTW	120	10	13 6 2
LG3050 143 9	Style 9	14	2.08	3	50	15	SJTW	125	13	14 6 2

*Does not include cord

Light cord reels are UL listed for the United States. Power cord reels and hand crank reels are UL listed for United States and Canada.

Products on this page are warranted for 1 year.

Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

Indiana & California Warehouses

California Warehouse

Canadian Warehouse

Better by Design

Adjustable Bumper Stop

Allows any desired length of cord to be maintained outside the reel.

Corrosion-Resistant

Steel components are individually powder coated to virtually eliminate corrosion.

Reelcraft offers many styles of outlets and lamps

- Single receptacle
- Duplex outlet box
- Triple tap
- R.V. plug
- Fluorescent
- Incandescent
- LED
- Flying lead

Easy to Mount

Attaches to most structurally sound surfaces. Edges are curved for safety.

Note: Swing brackets should be used if cords are pulled at more than 45°, see page 47.



- All models supplied with cord are complete with a 5 foot pigtail and three-prong plug (flying lead reels supplied with conduit box)

- Adjustable cord stop supplied on models with cord

Adjustable Guide Arm

Multiple guide arm positions for versatile uses and easier field adjustment.

Enclosed Drive Spring

Drive mechanism is enclosed for protection against the environment.

Long Life Drive Spring

Declutching arbor virtually eliminates possibility of spring damage due to reverse winding of reel spool.



Structural Strength

Robotically welded heavy gauge steel frame.

Made in USA



L 4 0 5 0 1 6 3 3

REEL SERIES
40 = 4000 SERIES
45 = 4500 SERIES
55 = 5500 SERIES
57 = 5700 SERIES
70 = 7000 SERIES

FOR REFERENCE ONLY

WIRE SIZE
10 = 10 GAUGE
12 = 12 GAUGE
16 = 16 GAUGE

LENGTH OF CORD
00 = W/O CORD
35 = 35 FEET
45 = 45 FEET
50 = 50 FEET

NO. OF CONDUCTORS
2 = TWO CONDUCTOR
3 = THREE CONDUCTOR
4 = FOUR CONDUCTOR

STYLE NUMBERS
NONE = OPEN END
1 = INCANDESCENT LAMP
2 = FLUORESCENT LAMP
3 = SINGLE RECEPTACLE
4 = R.V. PLUG (M)
5 = INCANDESCENT NON-SPARKING
6x = FLUORESCENT EXPLOSION PROOF
7 = DUPLEX OUTLET BOX (F)
8 = FLUORESCENT WITH OUTLET
9 = TRI TAP
10 = LED LAMP
X = FLYING LEAD

Model Number Significance

This chart is for reference purposes only. Reels cannot be ordered by selecting from this chart. Please refer to selection charts on pages 38-39 or consult manufacturer for any questions about option combinations.

Model	Outside Diameter of Cord	Cord Specifications		
		AWG	mm ²	# Cond.
600193	.320" - .530"	16	1.33	3
1-HR1004-A	.438" - .624"	12	3.32	3
600267	.645"	10	5.37	3
1-HR1004	.625" - .749"	12	3.32	3
3-HR1004-3	1.06" - 1.30"	6	8.00	3

Power and Light Cord Reels | Series L4000 / L5000 / L7000

Made
in USA



L 4050 163 X



L 4545 123 9G

- ✓ Compact for critical space requirements
- ✓ Durable abrasion and corrosion resistant baked-on powder coat finish
- ✓ Engineered for industrial use
- ✓ Adjustable cord stop

- ✓ All models supplied with cord are complete with a 5 foot pigtail and three-prong plug (except flying lead reels)
- ✓ Wall, ceiling or bench mount



L 4545 123 7

Cord Options

	#3 - Single Receptacle Single 15 AMP with clamp type strain relief for both 16 AWG and 12 AWG cord. NEMA 5-15R
	#3A - Single Receptacle Single 20 AMP. NEMA 5-20R
	#3B - Twist Lock Connector Single 20 AMP with twist lock connector. NEMA L5-20R
	#4 - R.V. Plug Male rubber plug used with recreational vehicles (RV's).
	#7/7A/7B - Duplex Outlet Box Duplex outlet box with flip-top lid. GFCI protection on #7 and 7A.
	#9/9G - Triple Tap Molded triple tap. GFCI protection on #9G only.
	X - Flying Lead Bare cord or cable endings and conduit box.

Model with Cord	Cord Ending	Cord Specifications					Volts	Amps	Shipping Weight	Size Index	
		AWG	mm	# Cond.	ft	m	Type				
L 4035 163 3	Single Receptacle	16	1.33	3	35	11	SJTOW	125	13	25	11
L 4050 163 3	Single Receptacle	16	1.33	3	50	15	SJTOW	125	13	26	12
L 4545 123 3	Single Receptacle	12	3.32	3	45	14	SJEOW	125	15	27	12
L 5550 123 3	Single Receptacle	12	3.32	3	50	15	SJEOW	125	15	44	20
L 4545 123 3A	Single Receptacle	12	3.32	3	45	14	SJEOW	125	20	28	13
L 5550 123 3A	Single Receptacle	12	3.32	3	50	15	SJEOW	125	20	44	20
L 4545 123 3B	Twist Lock Connector	12	3.32	3	45	14	SJEOW	125	20	28	13
L 5550 123 3B	Twist Lock Connector	12	3.32	3	50	15	SJEOW	125	20	44	20
L 5750 103 4	R.V. Plug	10	5.37	3	50	15	SOOW	125	30	50	23
L 4545 123 7	Duplex Outlet Box w/GFCI (F)*	12	3.32	3	45	14	SJEOW	125	15	29	13
L 4545 123 7A	Duplex Outlet Box w/GFCI (F)*	12	3.32	3	45	14	SJEOW	125	20	29	13
L 4545 123 7B	Duplex Outlet Box	12	3.32	3	45	14	SJEOW	125	20	29	13
L 5550 123 7	Duplex Outlet Box w/GFCI (F)*	12	3.32	3	50	15	SEOW	125	15	45	20
L 4050 163 9	Triple Tap	16	1.33	3	50	15	SJEOW	125	13	26	12
L 4545 123 9	Triple Tap	12	3.32	3	45	14	SJEOW	125	15	28	13
L 4545 123 9G	Triple Tap w/GFCI(F)	12	3.32	3	45	14	SJEOW	125	15	29	13

For indoor non-weather tight applications only. All models UL listed at 125 Volt 60 HZ single phase. *The GFCI Receptacle is designed to protect from line-to-ground shock hazards. The Ground Fault Circuit Interrupter does not protect against short circuits or overloads; this is the function of the fuse or circuit breaker. Reference page 4 for guide arm positions. **NOTE:** Swing brackets should be used if cords are pulled at more than 45°, see page 47.

Flying Lead Model with Cord	Model No Cord	Cord Specifications					Volts/ Amps	Volts/ Amps	Shipping Weight*	Size Index	
		AWG	mm	# Cond.	ft	m	Type				
L 4050 163 X	L 4000	16	1.33	3	50	15	SJEOW	125 / 13	220 / 6.5	22	10
-----	L 4100	16	1.33	4	40	12	SJEOW	125 / 13	220 / 6.5	22	10
L 4545 123 X	L 4500	12	3.32	3	45	14	SJEOW	125 / 20	220 / 10	22	10
-----	L 5000	10	5.27	3	35	11	SO	125 / 30	220 / 15	29	13
-----	L 5400	12	3.32	3	35	11	SJEOW	125 / 13	220 / 6.5	25	11
L 5550 123 X	L 5500	12	3.32	3	50	15	SEOW	125 / 20	220 / 10	35	16
L 5550 124 X	-----	12	3.32	4	50	15	SEOW	-----	600 / 16	44	20
L 5750 103 X	L 5700	10	5.27	3	50	15	SEOW	125 / 30	220 / 15	37	17
-----	L 7000	6	13.3	4	35	11	SOOW	-----	220 / 45	41	19
L 7050 104 X	-----	10	5.27	4	50	15	SEOW	-----	600 / 20	65	29

For indoor non-weather tight applications only. All models UL listed at 125 Volt 60 HZ single phase. *Weight of model without cord. **Refer to reelcraft.com. Reference page 4 for guide arm positions.

Available Options

Mounting Brackets

See page 47



Optional Roller Guide

See page 47

Replacement Bumpers

See page 49



Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.


Indiana Warehouse

Indiana & California Warehouses

California Warehouse

Canadian Warehouse

Power and Light Cord Reels | Series L4000 / L5000 / L7000

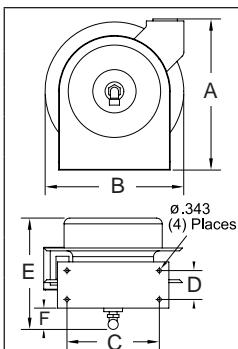

Dimensions - Size Index								
	1		2		3		4	
	in	mm	in	mm	in	mm	in	mm
A	13 ¹ / ₄	337	14 ¹ / ₂	368	17 ¹ / ₂	445	17 ¹ / ₂	445
B	12 ⁵ / ₈	321	13 ¹ / ₂	343	16 ¹ / ₂	419	16 ¹ / ₂	419
C	8	203	9 ³ / ₄	248	9 ³ / ₄	248	9 ³ / ₄	248
D	2 ¹ / ₂	64						
E	9 ³ / ₈	239	10 ¹ / ₂	267	10 ¹ / ₂	267	12 ¹ / ₂	318
F	1 ³ / ₄	44	2 ¹ / ₈	54	2 ¹ / ₈	54	2 ¹ / ₈	54



Made
in USA

L 4050 163 1



L 4050 163 10



L 4050 162 2

Model with Cord	Cord Ending	Cord Specifications					Volts	Amps	Shipping Weight	Size Index #	
		AWG	mm	#	Cord	ft	m	Type	lbs kg		
L 4035 163 1	*Incandescent	16	1.33	3	35	11	SJTOW	125	13	23 10	1
L 4050 163 1	*Incandescent	16	1.33	3	50	15	SJTOW	125	13	27 12	1
L 4035 A 163 5**	*Incandescent	16	1.33	3	35	11	SJEOWW	125	13	25 11	1
L 4050 A 163 5**	*Incandescent	16	1.33	3	50	15	SJEOWW	125	13	28 13	1
L 5245 A 163 6X**	Fluorescent	16	1.33	3	45	14	SEOOW	125	0.3	39 18	2
L 4035 162 2	Fluorescent	16	1.33	2	35	11	SJTOW	125	0.3	25 11	1
L 4050 162 2	Fluorescent	16	1.33	2	50	15	SJTOW	125	0.3	26 12	1
L 4035 163 8	Fluorescent Light and Outlet	16	1.33	3	35	11	SJTO	125	10	25 11	1
L 4050 163 8	Fluorescent Light and Outlet	16	1.33	3	50	15	SJTO	125	10	27 12	1
L 4035 163 10	LED	16	1.33	3	35	11	SJTOW	125	13	26 12	1
L 4050 163 10	LED	16	1.33	3	50	15	SJTOW	125	13	28 13	1

For indoor non-weather tight applications only. *Incandescent bulb 75 watt max. Series L4000 and L5000 models UL listed at 125 Volt 60 HZ single phase. **Models equipped with automatic on/off switch that activates power. **NOTE:** Swing brackets should be used if cords are pulled at more than 45°. Reference page 4 for guide arm positions.

Cord Options

	#1 - Incandescent Light	<ul style="list-style-type: none"> Single receptacle tool tap Push-through switch, metal grounded guard
	#2 - Fluorescent Light	<ul style="list-style-type: none"> Durable shock absorbing lamp holder Shatter-resistant tube with switch
	#5 - Incandescent Light	<ul style="list-style-type: none"> Rubber handle with vinyl-coated cage w/o switch or receptacle Automatic on/off switch at reel guide arm Complies with NEC #511-3, f., portable lighting equipment; meets OSHA requirements
	#6 - Fluorescent Light	<ul style="list-style-type: none"> Explosion proof 13 watt fluorescent hand lamp Automatic on/off switch at reel guide arm Suitable for Class 1, group C and D locations Note: Reel is not explosion-proof.
	#8 - Fluorescent Light	<ul style="list-style-type: none"> 120 V - 15 Amp receptacle in-line on lamp handle Scratch guard protects lamp cover
	#10 - LED Light	<ul style="list-style-type: none"> Two ultra high intensity 4-watt LEDs; single 3-watt end spot light Polycarbonate shatter-resistant light tube In-line tool tap, NEMA 5-15R configuration maximum 12 Amp draw

Auto-Switch Light Cord Reels

Models equipped with an automatic on/off switch incorporate a guide arm-mounted switch that activates power with a pull of the cord.



ON



OFF



L 5245 A 163 6X



Note: Reel is not explosion proof



Fluorescent Hand Lamp - order model 1 163 3 8

- One foot #16/3 conductor SJTOW-A yellow cord with molded NEMA 5-15P plug
- SAF-T-TIE keeps the light plugged into receptacle

Large Frame Cable Reels | Nordic Series CR

High Capacity Cable Reels

Nordic Series CR2400/CR3100

for 3-conductor service

Series CR2400 - Direct crank rewind or chain and sprocket drive powered by A.C. or D.C. electric motor or compressed air motor. An adjustable spring drag device is used to brake the reel.

Series CR3100 - Powered by a rugged spring protected by a tamperproof housing, a ratchet mechanism locks on payout of cable, but is easily disengaged with a pull to provide rewind.

Cable rollers: Series CR3100 models supplied with a 4-way roller guide assembly. Roller guide supplied with Series CR2400 models at extra cost. Roller position must be specified. If not specified, bottom wind will be supplied. Can be supplied or installed, consult manufacturer.

Note: A cable stop should be used to prevent damage to rollers and to permit adjustment of free cable length.


Made
in USA



Nordic
Series CR3100

Many more sizes, from standard components, available on request. Consult manufacturer.

Dimensions Diagram

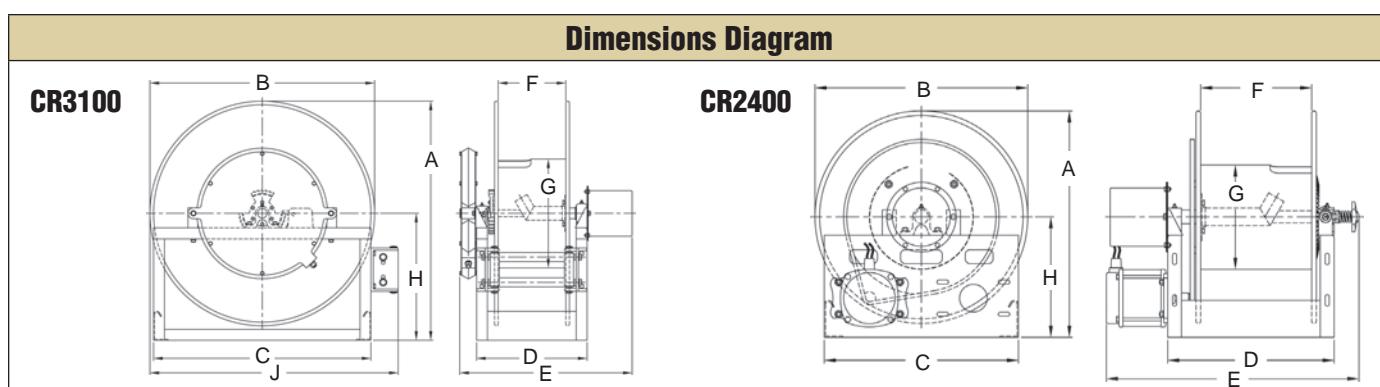

Gauge / No. of Conductors		16/3	14/3	12/3	10/3	8/3				Specifications - Cable Capacity and Reel Dimensions													
Cable O.D.		in mm	.375 10	.530 13	.580 15	.705 18	.750 19	1.000 25	1.250 32	1.500 38	"E" dimension based on three conductor slip ring												
Model		Cable Length								Est. Weight		A	B	B PWR	C	D	E	E PWR	F	G	H	J	
Spring Driven Reels																							
CR3100-23-4	ft m	85 26	85 26	100 30	100 30	90 27				92 LB 42 KG	in mm	24.5 622	23 584		21 533	9 229	18 457		4 102	15 381	13 330	26 660	
CR3100-25-4	ft m	95 29	100 30	100 30	100 30				97 LB 44 KG	in mm	26.5 673	25 635		21 533	9 229	18 457		4 102	15 381	14 356	27 686		
CR3100-31-4	ft m	120 37	120 37	130 40	130 40	130 40			118 LB 54 KG	in mm	33 838	31 787		30 762	9.25 235	19 483		4 102	20 508	17.5 445	34.5 876		
Hand Crank / Motor Driven Reels																							
CR2400-23-12	ft m	1900 579	930 283	775 236	520 158	430 131	240 73	155 47	105 32	72 LB 33 KG	in mm	24.5 622	23 584	23 533	21 457	18 737	29 737	29 305	12 286	11.25 330	13 330		
CR2400-31-8	ft m	2700 823	1350 411	1100 335	750 229	660 201	360 110	185 56	135 41	79 LB 36 KG	in mm	32.5 826	31 787	31 610	24 356	14 635	25 635	25 203	8 286	11.25 432	17 17		

Model numbers are representative. Final part number assigned upon quote.

Built to order, not returnable.

Heavy Duty Cord and Cable Storage Reels

Hand Crank, Bevel Crank & Motor Driven

Keep long lengths of expensive electrical cord off the ground and out of harm's way with Reelcraft's expanded Series 30000 line, which includes cable storage reels and live power cord. The reels are designed to handle long lengths of 10/3, 12/3 and 16/3 cable.

Reelcraft's Series 30000 storage reels and live power cord reels are constructed of heavy gauge steel and are assembled with vibration-proof, self-locking fasteners to ensure assembly integrity. They undergo a five-stage cleaning process and are individually powder-coated for the highest quality, corrosion-resistant paint adhesion. Suited for indoor, non weather-tight applications only.

Cord/Cable Storage Reels

Cord and cable storage reels are used for storage, unwinding, and winding of conductive cord/cable. The reel is not intended to be live and the power source must be disconnected while reeling/de-reeling to avoid twisting the wires. Series 30000 cable storage reels are available in hand crank only.



CA30112-CS
Cable not included


Live Power Cord Reels

Live power cord reels have collector rings that allow the reel to wind/unwind the cord/cable with live current without twisting the wires. Live reels offer the advantage of using a reel as an effective piece of operating equipment rather than a simple device for the storage of cable or cord. Series 30000 live power cord reels are available in direct hand crank, bevel gear crank or electric motor-driven rewind.



LE312 123 12D

Made in USA 

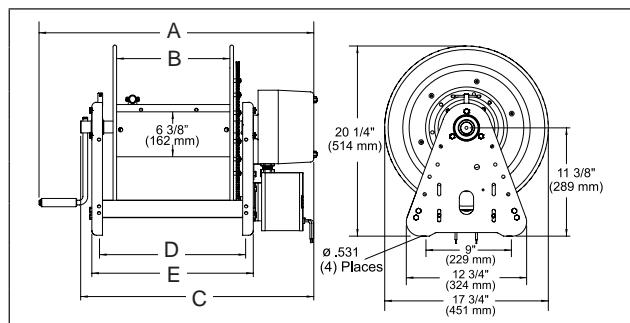

Dimensions - Size Index

	1		2		3		4		5	
	in	mm								
A	18 ¹ / ₄	464	24 ¹ / ₄	616	29 ³ / ₈	746	29 ³ / ₈	746	25	635
B	6	152	12	305	12	305	12	305	12	305
C	N/A		N/A		23 ³ / ₄	603	23 ³ / ₄	603	23 ³ / ₄	603
D	9 ³ / ₄	248	15 ³ / ₄	400						
E	11	280	17	432	17	432	17	432	17	432

Model without Cable	Drive Type	Cord Specifications					Volts	Amps	Shipping Weight	Size Index #
		AWG	mm ²	# Cond.	ft	m				
CA30106-CS*	Hand Crank	10	5.211	3	140	43	This reel is for storage only. Not intended to be live.	37	17	1
		12	3.131	3	175	53				
		16	1.0524	3	425	130				
CA30112-CS*	Hand Crank	10	5.211	3	280	86	This reel is for storage only. Not intended to be live.	46	21	2
		12	3.131	3	350	106				
		16	1.0524	3	850	260				
LB312 123	Bevel Crank	12	3.131	3	200	61	600	25	51	23
LB312 103	Bevel Crank	10	5.211	3	200	61	600	30	52	24
LC312 123	Hand Crank	12	3.131	3	200	61	600	25	50	23
LC312 103	Hand Crank	10	5.211	3	200	61	600	30	51	23
LE312 123 12D	Motor Driven**	12	3.131	3	200	61	600	25	68	31
LE312 103 12D	Motor Driven**	10	5.211	3	200	61	600	30	69	31

NOTE: Cord must be fully unspooled before use. Actual fill capacities vary with cord O.D. and jacket type. Consult manufacturer for applications requiring cord types other than SO, SOW, or SJO. Reel suited for indoor, non-weather tight applications only. *Power source must be disconnected while reeling/de-reeling. Through shaft on cable storage reels facilitates cable sizes up to .969" O.D. for other sizes, consult manufacturer. **All motor driven models are 12 V DC non-explosion proof. Other motor options available upon request.

Available Options

Roller Guides
See page 47



Switches & Motors
See page 48



Replacement Bumpers
See page 49



Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

 Indiana Warehouse

 Indiana & California Warehouses

 California Warehouse


 Canadian Warehouse

Customer Service: 1.855.634.9109

All Other Calls: 1.800.444.3134

 REELCRAFT®

Complete Welding Series | Series TW / STW / BA

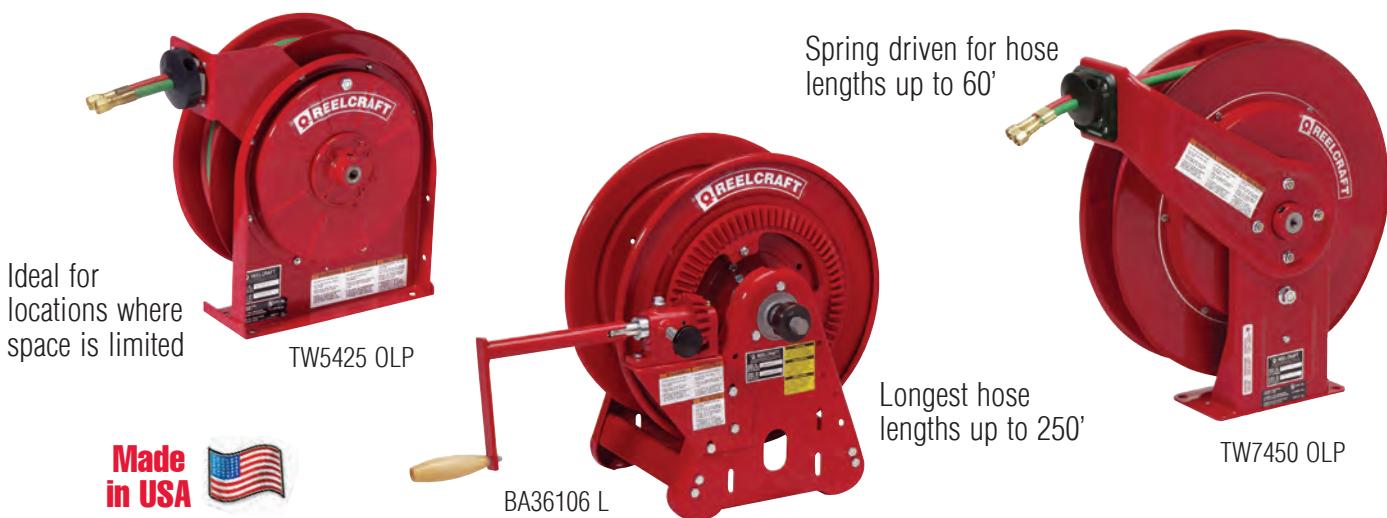

Model with Hose	Shipping Weight		Hose I.D.		Hose O.D.		Hose Length		Pressure		Hose Outlet		Reel Inlet		Model without hose & bumper	Shipping Weight		Size Index #
	lbs	kg	in	mm	in	mm	ft	m	psi	bar	in	in	in	in		lbs	kg	
Oxygen / Acetylene (only) Hose Reels																		
CA TW5425 OLP	26	12	1/4	6	.530	13	25	8	200	14	9/16 - 18(F)	1/4 NPT(F)	TW5400 OLP	21	10	1		
IN STW3450 OLP	29	13	1/4	6	.530	13	50	15	300	21	9/16 - 18(F)	9/16 - 18(M)	-----	-----	-----	-----	-----	See pg. 21
CA TW7450 OLP	50	23	1/4	6	.530	13	50	15	200	14	9/16 - 18(F)	1/4 NPT(F)	TW7400 OLP	CA 42	19	2		
IN TW7460 OLP	55	25	1/4	6	.530	13	60	18	200	14	9/16 - 18(F)	1/4 NPT(F)	TW7400 OLP	CA 42	19	2		
IN Series 30000 Hand Crank	1/4	6	.530	13	125	38	200	14	9/16 - 18(M)	1/4 NPT(F)	BA36106 L	50	23	4				
IN Series 30000 Hand Crank	1/4	6	.530	13	250	76	200	14	9/16 - 18(M)	1/4 NPT(F)	BA36112 L	57	26	5				
Welding Gas - Oxygen / Acetylene, Mapp, Propane, Natural and Fuel Gas (T-Grade) Hose Reels																		
IN TW5425 OLPT	26	12	1/4	6	.530	13	25	8	200	14	9/16 - 18(F)	1/4 NPT(F)	TW5400 OLPT	22	10	1		
IN TW7450 OLPT	50	23	1/4	6	.530	13	50	15	200	14	9/16 - 18(F)	1/4 NPT(F)	TW7400 OLPT	43	20	2		
IN TW7460 OLPT	55	25	1/4	6	.530	13	60	18	200	14	9/16 - 18(F)	1/4 NPT(F)	TW7400 OLPT	43	20	2		
IN TW84100 OLPT	101	46	1/4	6	.530	13	100	30	200	14	9/16 - 18(F)	9/16 - 18(M)	TW84000 OLPT	81	37	3		
IN TW86075 OLPT	99	45	3/8	10	.625	16	75	23	200	14	9/16 - 18(F)	9/16 - 18(M)	TW86000 OLPT	86	39	3		

Acetylene and fuel gas (red) inlet 1/4" FPT / oxygen (green) inlet 1/4" FPT. 9/16-18 models above are B size. Acetylene/fuel gas side has a LH thread and the oxygen side has a RH thread. Models supplied less hose have male outlets. Maximum temperature 150 °F (65 °C). Reference page 4 for guide arm positions.

Inlet Hose Assemblies

Part Number	Hose I.D.		Length		End Fittings		Pressure		Weight	
	in	mm	ft	m	in	psi	bar	lbs	kg	
Twin Welding Oxygen/acetylene only (RM grade)										
S600100-2	1/4 dual	6	2	.61	9/16-18 LH/RH(F)	200	14	.70	.32	
S600100-4	1/4 dual	6	4	1.22	9/16-18 LH/RH(F)	200	14	1.12	.51	
S600100-6	1/4 dual	6	6	1.83	9/16-18 LH/RH(F)	200	14	1.90	.86	
Twin Welding Mapp, propane, natural and fuel gas (T-grade)										
S601031-2	1/4 dual	6	2	.61	9/16-18 LH/RH(F)	200	14	.70	.32	
S601031-4	1/4 dual	6	4	1.22	9/16-18 LH/RH(F)	200	14	1.12	.51	
S601031-6	1/4 dual	6	6	1.83	9/16-18 LH/RH(F)	200	14	1.90	.86	

Hose Inlet Connecting Fittings - Optional

Model No.		Inlet Connection Fittings								
90°	S300090	ACETYLENE B size 9/16 - 18 LH (M) x 1/4" NPT (M)								
	S300091	OXYGEN B size 9/16 - 18 RH (M) x 1/4" NPT (M)								
Straight	261371	OXYGEN B size 9/16 - 18 RH (M) x 3/8" NPT (M)								
	261372	ACETYLENE/fuel gas - B size 9/16 - 18 LH (M) x 3/8" NPT (M)								

Hose supplied on oxygen/acetylene reels is twin-Siamese type meeting R.M.A. and C.G.A. type V.D., grade RM specifications.

Hose Assemblies

Part Number	I.D. & O.D.		Length		Pressure		NPTF(M) End Fittings	Weight	
	in	mm	ft	m	psi	bar		lbs	kg
Twin Welding Oxygen/acetylene only (RM grade) - LH/RH(F)									
601032-25	1/4	6	25	8	200	14	9/16-18	6.5	3.0
601032-50	1/4	6	50	15	200	14	9/16-18	12.1	5.5
601032-60	1/4	6	60	18	200	14	9/16-18	13.3	6.0
601032-100	1/4	6	100	30	200	14	9/16-18	24.2	11.0
Twin Welding Mapp, propane, natural and fuel gas (T-grade) - LH/RH(F)									
601031-25	1/4	6	25	8	200	14	9/16-18	6.5	3.0
601031-50	1/4	6	50	15	200	14	9/16-18	12.1	5.5
601031-60	1/4	6	60	18	200	14	9/16-18	14.4	6.50
601031-100	1/4	6	100	30	200	14	9/16-18	24.2	11.0

Caution: Be sure working pressure required does not exceed above ratings.

Misapplication can result in serious operator injury. **Note:** Advise product to be handled, maximum temperature and pressure fitting size or sizes when ordering.

NOTE: Reels without hose, Series TW5400 OLP(T), TW7400 OLP(T), TW84000 OLPT and TW86000 OLPT are U/L listed #70H2.

Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

Indiana & California Warehouses


California Warehouse

Canadian Warehouse

Complete Welding Series | Series TW / STW / BA

Features

- ✓ Designed to improve safety in the work area with an increase in productivity and efficiency
- ✓ Full flow shaft swivels
- ✓ Independent dual swivel body manufactured from aluminum and hard-coated for wear resistance assures positive separation of gases due to its unique design
- ✓ Double-sealed, O-rings prevent leakage
- ✓ Swivel body and inlet are both permanently identified with machined grooves on the acetylene side to assure proper installation
- ✓ Durable abrasion and corrosion resistant baked-on red powder-coated finish
- ✓ Reel frame, spool and drum are fabricated of heavy gauge steel
- ✓ Temperature operating range: 20 °F / -29 °C to +250 °F / +120 °C



Dual swivel is an exclusive Reelcraft design

Independent dual swivel body

manufactured from aluminum and hard coated for wear resistance. Assures positive separation of gases due to its unique design.

Double-sealed, special molded O-rings prevent leakage. Swivel body and inlet are both permanently identified with machined grooves on the acetylene side to assure proper installation. Available with TW5000 and TW7000 series reels.

Lighter weight for hose lengths up to 50'



STW3450 OLP

*See page 21 for additional details.

Made in Australia



Dual welding, spring driven for high volume of gas


TW84100 OLPT

Available in T grade only

Made in USA 

"T" Grade Fuel Gas Reels


"T" grade hose reels are used for a wide variety of gases such as mapp gas, propane gas, natural gas and fuel gases. When ordering any welding hose reels you must specify the type of gas being used. To order "T" grade reels, add a suffix "T" to the TW models. Example - TW5425 OLPT.

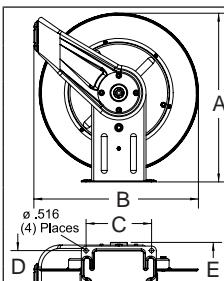

Series 5000 / 7000 / 80000

	1 in mm	2 in mm	3 in mm
A	14 ¹ / ₂ 368	20 ¹ / ₄ 514	25 ³ / ₈ 645
B	13 ³ / ₄ 349	19 ³ / ₄ 502	24 610
C	9 ³ / ₄ 248	77 ⁷ / ₈ 200	10 254
D	21 ¹ / ₂ 64	37 ⁷ / ₈ 98	6 152
E	6 152	7 ³ / ₈ 187	12 ¹ / ₄ 311

Series 5000 reels have four 5/16" (8 mm) diameter mounting holes.

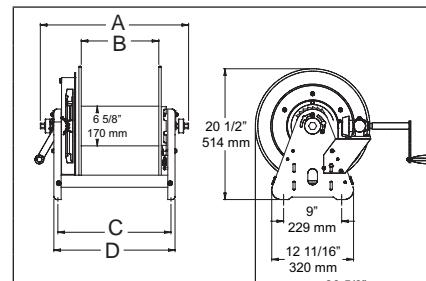

Series 30000

	4 in mm	5 in mm
A	15 ⁵ / ₈ 397	21 ⁵ / ₈ 550
B	6 152	12 305
C	9 ³ / ₄ 248	15 ³ / ₄ 400
D	11 280	17 432

Four 1/2" (12.7 mm) mounting holes. Overall length with crank handle removed is 17³/₄" (451 mm).

Available Options

Mounting
Brackets
See page 47



Inlet Hose
Assemblies
See page 42



Replacement
Bumpers
See page 49



Replacement
Hoses
See page 50



Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

 Indiana Warehouse

 Indiana & California Warehouses

 California Warehouse

 Canadian Warehouse

Customer Service: 1.855.634.9109

All Other Calls: 1.800.444.3134

 **REELCRAFT**®



CEA30006



WC80001

Hand Crank / Spring Retractable Cable Welding Reels Series CEA / WC

- Designed to improve safety in the work area with an increase in efficiency and productivity
- Cable reels have a current path through a continuous 400 AMP, 90 V DC (maximum) rated enclosed slip ring




Shown with electrode, clamp and cable (not included)

- Welding cable reels store work lead or electrode lead, up to #2/0, safely and effectively when not in use. Each lead requires a separate reel. When welding also refer to ANSI/ASC Z 49.1
- Stores cable when not in use, eliminating tangled, kinked welding cables
- Maintains proper bend radius of cables, providing longer cable life
- Keeps work area and vehicles better organized, resulting in better space utilization


Features - Hand Crank Reels

- ✓ All-bolted heavy gauge steel construction provides long life and ease of use and maintenance.
- ✓ Manual drum lock prevents spool from turning when not in use preventing unwanted pay out of cable.

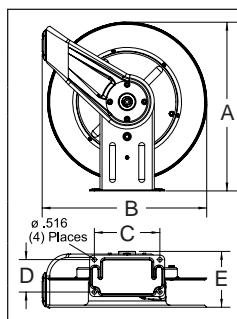

Dimensions - Size Index

	1		2	
	in	mm	in	mm
A	20 ¹ / ₄	514	25 ³ / ₈	645
B	19 ³ / ₄	502	24	610
C	7 ⁷ / ₈	200	10	254
D	3 ⁷ / ₈	98	6	152
E	13 ¹ / ₄	337	15 ⁵ / ₈	397

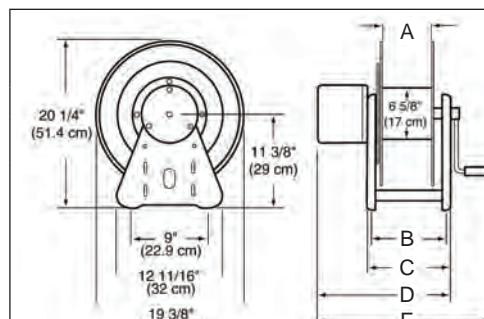

Dimensions - Size Index

	3		4	
	in	mm	in	mm
A	6	152	12	305
B	9 ³ / ₄	248	15 ³ / ₄	400
C	11	279	17	432
D	15	381	21	533
E	21	533	27	686

Four 1/2" (12.7 mm) diameter mounting holes.

Caution:

If cable reels are to be used for extended periods of time, unwind all cable from reel to prevent heat build-up. For indoor non weather-tight applications only.

Available Options

Roller Guides

See page 47



Replacement Bumpers

See page 49



Model without cable & bumper	Cable Size								Shipping Weight	Size Index #	
	#2 (31mm ²)	#1 (39mm ²)	#1/0 (50mm ²)	#2/0 (62mm ²)	ft	m	ft	m			
CEA30006	300	91	250	76	200	61	150	46	46	21	3
CEA30012	500*	152	500*	152	400	122	300	91	54	24	4
WC7000	-----	50	15	50	15	50	15	58	26	1	
WC80001	-----	75	23	75	23	75	23	102	46	2	
WC80002	-----	100	30	-----	-----	-----	-----	104	47	2	

*May exceed maximum cable length allowable for most welding applications. **NOTE:** Each cable requires separate reel. Reference page 4 for guide arm positions.

Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

California & Indiana Warehouses

California Warehouse

Canadian Warehouse

Multiple Configurations | Safe-T-Reel Series

Hand Crank Reels

Up to 150' fuel gas

Up to 200' 12/3 cable



Ideal for applications where space, weight and flexibility are key, these reels are designed for manual winding of air/water/fuel gases hose, electric cord and welding cable. Versatile in function, select configurations to suit specific needs. Safe-T-Reels offer trouble-free management of large capacities of hose or cord.



Side-by-side combinations


Stacked combinations
T-2464-0



T-2462-0

Model without cable	AMP	Reel Capacity		Cable	Shipping Weight	Size Index	
		ft	m				
Single Welding Cable 600 V, 2/0 Cable							
T-1460-0	250	200	61	-----	32 15	2	
Single Power Cable - 3 Conductor							
T-1535-003	30	150	45	8 3	18.5 5	1	
T-1535-083-100*	33	100	30	8 3	50 23	1	
T-1535-103-200*	24	200	61	10 3	81 37	1	
T-1535-123-100*	25	100	30	12 3	46 21	1	
T-1535-123-200*	20	200	61	12 3	71 32	1	

*Includes cable.

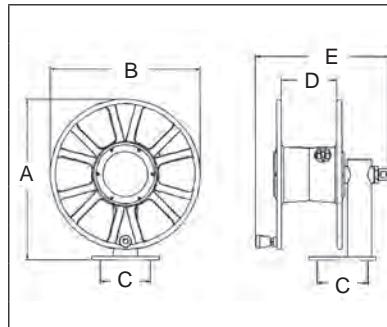

Dimensions - Size Index

	1	2	3
	in mm	in mm	in mm
A	19 483	19 483	19 483
B	18 457	18 457	18 457
C	6 152	6 152	6 152
D	6 ¹ / ₂ 165	6 ¹ / ₂ 165	12 ¹ / ₂ 165
E	15 ³ / ₄ 401	16 ¹ / ₄ 412	21 ³ / ₄ 552

Four 1¹/₂" (12.7 mm) diameter mounting holes.

Model without hose	Hose I.D.		Hose O.D.		Reel Capacity		Pressure	Shipping Weight	Size Index	
	in	mm	in	mm	ft	m	psi	bar	lbs kg	#
Single Spool Air/Water Hose Reels Maximum Temperature 150 °F (65 °C)										
T-1115-08	1/2	13	.844	21	150	46	300	21	18 8	1
T-1116-08	1/2	13	.844	21	250	76	300	21	22 10	3
T-1117-12	3/4	19	1.188	30	50	15	250	17	18 8	1
T-1118-12	3/4	19	1.188	30	75	23	250	17	22 10	3
Single Spool Oxygen/Acetylene T-Grade Seals Maximum Temperature 150 °F (65 °C)										
T-1225-04	1/4	6	.530	13	150	45	200	14	19 9	2
T-1225-04-100T*	1/4	6	.530	13	100	30	200	14	44 20	2
T-1226-06	3/8	10	.625	16	100	30	200	14	19 9	2

*Includes hose.

Detail of heavy duty shaft

with tapered roller bearing for high rigidity



Shaft sizes are 1" to 1.25" in diameter, supported by tapered roller bearings with 2" to 2.3" housings.



T-1225-04-100T

Model without cable	AMP	Reel Capacity		Shipping Weight	Size Index		
		ft	m	lbs	kg	#	
Dual Side-by-Side Welding Cable (2) 600 V, 2/0 Cable							
T-2462-0	250	200	61	51	23	5	
Dual Stacked Welding Cable (2) 600 V, 2/0 Cable							
T-2464-0	250	200	61	62	28	4	
Dual Side-by-Side Power Cable/Air Hose							
T-2735-2-0*	35	200	61	40	18	5	
		150	45				

*Air hose side has 1¹/₂" (12.7mm) inlet.

	Dimensions - Size Index	
	4	5
	in mm	in mm
A	38 965	19 483
B	18 457	18 457
C	6 152	6 152
D	6 ¹ / ₂ 165	6 ¹ / ₂ 165
E	16 ¹ / ₄ 737	29 737

Four 1¹/₂" (12.7 mm) diameter mounting holes.

Caution: Compressed air hoses should not be converted to oxygen service. Compressed air hoses are often contaminated with an oil coating, which can react explosively when oxygen is introduced. Oxygen/Acetylene cannot be combined with welding cable or power cord. **Note:** Models listed are without hose and/or cable except where listed. Weights listed above are actual product weight without packaging materials. Safe-T-Reels are available with cable or hose and in various combinations. Please consult Reelcraft customer service for additional information.

Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

Indiana & California Warehouses

California Warehouse

Canadian Warehouse


Customer Service: 1.855.634.9109
All Other Calls: 1.800.444.3134

REELCRAFT®

Tool Balancers | Series TB / TBL

Top Five Benefits

1. Balances the weight of assembly tools, making them nearly weightless
2. Reduces operator fatigue
3. Improves safety and ergonomics
4. Increases productivity by keeping tools positioned for immediate use with minimal operator motion
5. Reduces tool damage by preventing tools from being accidentally dropped

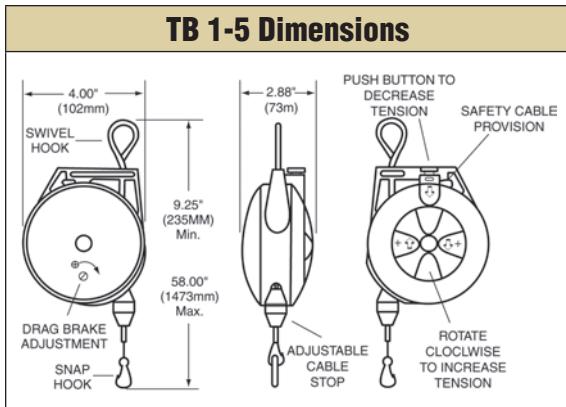

Model	Min - Max Load		Cable Length*		Shipping Weight	
	lbs	kg	ft	m	lbs	kg
TB 01	0.0 - 1.5	0.0 - 0.7	6	1.8	1.0	0.5
TB 03	1.5 - 3.0	0.7 - 1.4	6	1.8	1.0	0.5
TB 05	3.0 - 5.0	1.4 - 2.3	6	1.8	1.5	1


*Cable lengths listed are "active" or "working" cable. Safety tool clip and cable stop included. Maximum temperature 150 °F (65 °C).

Model	Min - Max Load		Cable Length*		Shipping Weight		Ratchet Lock
	lbs	kg	ft	m	lbs	kg	
Constant Pull Reels - may be adjusted to balance through 6-18 in (152-457 mm) range.							
TB 10	5.0 - 10	2.3 - 4.5	8	2.4	9	4	NO
TB 12	8.0 - 12	3.6 - 5.4	8	2.4	10	4.5	NO
TB 15	10 - 15	4.5 - 6.8	8	2.4	10	4.5	NO
TB 23	16 - 23	7.2 - 10.4	8	2.4	10	4.5	NO
Reels with Ratchet Lock - retract tool upward when manually released.							
TBL 10	5.0 - 10	2.3 - 4.5	8	2.4	9	4	YES
TBL 12	8.0 - 12	3.6 - 5.4	8	2.4	10	4.5	YES
TBL 15	10 - 15	4.5 - 6.8	8	2.4	10	4.5	YES
TBL 23	16 - 23	7.2 - 10.4	8	2.4	10	4.5	YES

*Cable lengths listed are "active" or "working" cable. Safety tool clip and cable stop included. Maximum temperature 150 °F (65 °C).



Tool balancers make tools nearly weightless, reduce fatigue

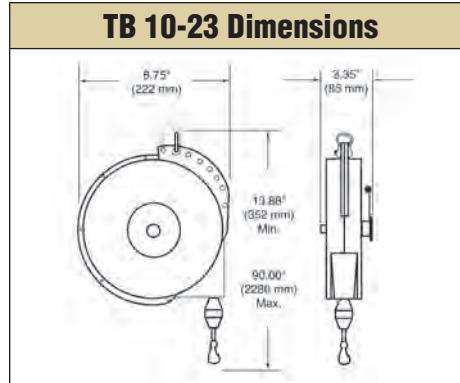


Optional Accessories

Cables can be combined for added length


Overhang Cable	
Model No.	Length
600605-3	3.0 ft / 91.5 cm
600605-5	5.0 ft / 152.4 cm
Safety Cable/Chain	
600603*	1.0 ft / 30.5 cm
600604**	1.0 ft / 30.5 cm

*Nylon covered steel cable (1 to 6 lbs models)

**Steel link chain (10 to 23 lbs models)



Strongly recommended, secondary steel cable or steel link chain. Prevents balancer from accidental fall. Balancers have extra holes for cable or chain.

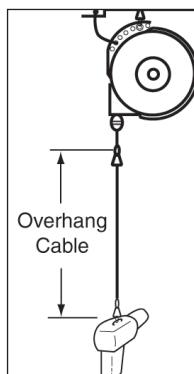

Nylon covered steel cable with safety clip. Brings tools closer to work area without unwinding cable from reel or mounting reel at lower height.

Models listed with an icon can ship same day upon request when the order is received by 11:30 AM Eastern Time for quantities of 10 or fewer.

Indiana Warehouse

California & California Warehouses

California Warehouse

Canadian Warehouse

Reel Accessories | Roller Guides / Mounting Brackets

Roller Hose Guide Assemblies



HR1057 / HR1059




HR1145



S270109 / 600168

Model	Accommodates		Weight in (mm)	Dimensions										
	Hose O.D.			A		B		C		D		E		
	in	kg		in	mm	in	mm	in	mm	in	mm	in	mm	
HR1057	.603 (16) - .906 (23)	.25 .12	.875	22.3		N/A		3.125	79.4	3.125	79.4	1.6875	42.9	
HR1059	.250 (6.4) - .625 (15.9)	.25 .12	0.625	15.9		N/A		3.125	79.4	3.125	79.4	1.6875	42.9	
HR1145	.603 (16) - .906 (23)	.34 .15	2	50.8	1	25.4	3.75	95.3	2.75	69.9	2.125	54.1	3.125	79.4
S270109	.900 (23) - 2.00 (50.8)	5.39 2.44	5.25	133.4	2.375	60.4	12	305	8	204	5	127	10.5	267
600168	.900 (23) - 1.38 (35)	1.75 .34	1.75	44.5	2.0625	27	5.125	130	5.125	130	4	102	4	102

These four-way roller guide assemblies are for use with reels on cabinet door openings and for similar locations where sharp edges may cut or damage the hose. The four-way design permits pulling or retracting hose at any angle. Model S270109 has nylon rollers mounted on an 11 gauge steel frame with pre-drilled mounting holes.

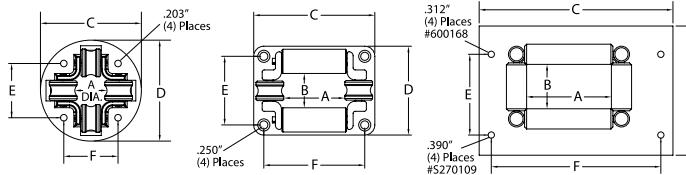

Note: A hose bumper should be used with the four-way roller hose guide assemblies to prevent damage to rollers and nozzles. See chart on page 49.

Additional Accessories

 600608	340° Pivot Base	For Reel Series	Part #
	Aligns reel to the direction of hose or cord run. May be mounted with reel upright or hanging. Weight 10 lbs (5 kg). Note: Use if hoses or cords are pulled at more than 45°.	RT / 4000 / 5000 / 5005 / 7000	600608
		80000 / D80000 / 30006	600801
		30012	600801-12
 600992	Wall-Mounted Universal Swing Bracket Bracket will pivot approximately 180°. All steel construction with a durable baked on powder coat finish. Weight 6 lbs (3 kg). Note: Use if hoses or cords are pulled at more than 45°. Note: Not for overhead mounting.	For Reel Series	Part #
		RT	600992
		4000 / 5000	600993
		RT / 4000 / 5000 / 5005 / 7000	600626
		80000 / D80000 / DP5000 / DP7000	600980
 600295	Top Mounting Channels and Beam Clamps 600370 Top channel and beam clamps - for one reel 600295 Top channel and beam clamps - for two reels For mounting Series 7000 reels to an I-beam or overhead support. Mounting channels can be mounted end to end to mount three or more reels. To permit the mounting of Reelcraft Series RT, 4000, 5000, 5005 and electric cord reels on mounting channel, an adaptor assembly must be used (#600230).		
	600230 Adaptor Assembly Used with top channels and beam clamps only.		
 600230			
		Hose Reel Spool Size in mm	Bottom Wind Roller bracket assembly model number
		Top Wind Roller bracket assembly model number	Multi Position Roller bracket assembly model number
Series 30000 - Four Way Rollers			
6	152	S600693-1	S600692-1
12	305	S600693-2	S600692-2
18	457	S600693-3	S600692-3
22	559	S600693-4	S600692-4
28	711	S600693-5	S600692-5
Series 30000 - Three Way Rollers			
6	152	S602132-1	S602133-1
12	305	S602132-2	S602133-2
18	457	S602132-3	S602133-3
22	559	S602132-4	S602133-4
28	711	S602132-5	S602133-5
Bottom wind and top wind may be used with all models except bevel crank. Multi position may not be used on models with a chain guard or Series 37000 reels.			

Reel Accessories | Switches / Motors

Operating Switches

Part No.	Specification	Use with motor
Push Button Switch		
S600870	115/230 V AC, 10 AMP fuse	S260430
600811	12/24 V DC, up to 1/3 HP, breaker and relay	S260409, 260450
S600808	600811 switch with bracket, 12/24 V DC	S260409, 260450
600869	12/24 V DC, up to 2/3 HP	S260583, S260626
260424	Momentary contact with rubber cap, 12/24 V DC, non-explosion proof	Any DC motor
260425	Momentary contact, class 1 group D, for 115/230 V AC rewind motor. May also be used with solenoid for 12 or 24 V DC.	Any explosion proof motor
Speed Control Switch		
600871	115/230 V AC, 10 AMP	S260430
600866	12/24 V DC	S260409, S260583, 260450, S260626
Push Button Switch with Speed Control		
S600872	115/230 V AC, 10 AMP fuse, adjustable speed control	S260430
600873	115/230 V AC, 10 AMP fuse, forward/reverse adjustable speed control	
600867	DC, 25 AMP, up to 1/3 HP	S260409
600868	DC, 40 AMP circuit breaker, up to 2/3 HP	S260583



Rewind Motors

Reels are equipped with electric or compressed air motors to drive chain and sprocket rewind mechanisms.

Part No.	Specification
Electric Motors	
S260409	Reversible type, 12 V DC 1/3 HP
260450	Reversible type, 24 V DC 1/4 HP
Explosion Proof Electric Motors	
S260430	Reversible type, single phase, explosion proof, Class 1 Group D Division 1, 115 V AC 0.40 HP. An explosion proof, Class I Group D junction box is available for wiring A.C. motors - #370200
S260626	24 V DC 2/3 HP. Electric motor reversible type. Explosion proof.
S260583	12 V DC 2/3 HP. Electric motor reversible type. Explosion proof.
Hydraulic Motor	
370066	1021 RPM, 668 lb-in, 2400 psi, 2.2 in ³ intermittent 1800 psi continuous.
Air Motors	
260428	4 AM delivers up to 1 1/2 HP, 1/4" NPTF (F) inlet.
260429	6 AM delivers up to 4 HP, 1/2" NPTF (F) inlet.



Additional Accessories

Part No.	Specification
Chain Shrouds	
S600518	Optional chain shroud for Series 30000 and Series 1200 reels.
S261746	Optional chain shroud for Series 2400, 3700 and 3900 reels.
Control Valves	
260454	Pneumatic on/off flow control valve assembly, 1/4" NPTF (F) inlet and outlet to be used with 4 AM compressed air motors. We also recommend using a filter, regulator, and lubricator with compressed air motors.
260455	Same as above with 3/8" NPTF (F) inlet and outlet, to be used with 6 AM motors.



*Reference reelcraft.com for detailed specifications.

Switch Accessories

Part No.	Specification
Circuit Breaker	
S260422	40 AMP. Use with DC electric rewind motors. Manual reset button must be pressed firmly to reset.
Starting Solenoid	
S260426	12 V DC for activation of motor.
Mounting Bracket	
260532	Combination for circuit breaker, solenoid and starting switch.
Junction Box	
370200	For explosion proof motor.



Reel Accessories | Bumpers / Inlet Assemblies

Adjustable Hose Bumpers

Adjustable hose bumpers are solid molded rubber assuring a long life and nonslip grip. Hose bumpers allow the desired length of hose to be permanently stored outside the reel. Hose bumpers are included on the reels purchased with hose. Reels purchased without hose do not include the hose bumper. When ordering, advise the part number, reel model and the hose I.D. and O.D. **NOTE: To order hose bumper with stainless steel hardware, change part number prefix from HR to HS.**

For Reel Series	Part Number	Hose O.D. (dia A)		Hose I.D.		Dia. B-C-E		Dia. D		Weight	
		in (mm)	mm	in	mm	in	mm	in	mm	lbs	kg
4000 / 5000 / RT400 / 3100 6000 / L4500 / L5000 / DP	1-HR1004-A	.438 (11) - .625 (16)		1/4	6	2 ¹ / ₂	64	1 ¹ / ₄	32	.24	.10
4000 / 5000 / D8000 / RT400 RT600 / 6000	1-HR1004	.625 (16) - .749 (19)		3/8	10	2 ¹ / ₂	64	1 ¹ / ₄	32	.25	.11
7000 / 80000 / E8000 / 3100 RT800 / 5000 / D80000 / DP	1-HR1004-3	.625 (16) - .749 (19)		3/8	10	3	73	1 ¹ / ₄	32	.24	.10
5000 / A5005 / 7000 / 80000 D8000 / E8000 / RT800 / DP	2-HR1004-3	.750 (19) - 1.05 (27)		1/2 or 3/8	13 or 10	3	73	1 ¹ / ₄	32	.23	.10
7000 / 8000 / D8000 / 80000 GC7000 / F7000 / F80000 / L7000 / DGM	3-HR1004-3	1.06 (27) - 1.38 (35)		3/4	19	3	73	1 ¹ / ₄	32	.32	.14
TW5000 / TW7000 / 3100T TW80000 / TWD80000	8-HR1004-3	.530 (13) twin		1/4 twin	6	3	73	1 ¹ / ₄	32	.24	.10
TH80000 / TW80000 / 3100T TH7000 / TW8000	600521	.680 (17) twin		3/8 twin	10	3 ¹ / ₂	89	2	51	.45	.20
3100T / 4800T / TH80000	600522	.810 (21) twin		1/2 twin	13	3 ¹ / ₂	89	2	51	.49	.22
D9000 / E9000 / 3100 / 4800	2-HR1005	.750 (19) - 1.05 (27)		1/2	13	3 ¹ / ₂	89	2 ⁷ / ₈	73	.95	.43
D9000 / E9000 / FE9000 / 3100 / 4800 / SD	3-HR1005	1.06 (27) - 1.38 (35)		3/4	19	3 ¹ / ₂	89	2 ⁷ / ₈	73	.95	.43
D80000 / D8000 / D9000 / E9000 / FD9000 / FE9000 / 3100 / 4800 / SD	4-HR1005	1.39 (35) - 1.55 (39)		1	25	3 ¹ / ₂	89	2 ⁷ / ₈	73	.81	.36
FE9500 / FF9500 / 4800	S600547-1	1.55 (39) - 1.75 (44)		1 ¹ / ₄	32	3 ³ / ₄	95	2 ⁷ / ₈	73	.70	.31
FE9600 / FF9600 / 4800	S600547-2	1.75 (44) - 2.03 (52)		1 ¹ / ₂	38	3 ³ / ₄	95	2 ⁷ / ₈	73	.57	.25



Inlet Hose Assemblies

A flexible hose connection must be used between the hose reel inlet and the source of supply to prevent possible misalignment and binding or warranty is void. Please furnish the following information when ordering: Part number, product and pressure to be handled. Other sizes available as well. **NOTE:** Swivel fittings are recommended to protect hose during installation.

Part Number	Hose I.D.		Hose O.D.		Length		End Fittings		Pressure		Weight	
	in	mm	in	mm	ft	m	in		psi	bar	lbs	kg
Low Pressure Air and water - PVC nylon braid												
S601024-2	3/8	10	.600	15	2	.61	3/8 x 3/8	NPTF(M)	300	21	.54	.24
S601020-2	1/2	13	.750	19	2	.61	1/2 x 1/2	NPTF(M)	300	21	.70	.32
S601026-2	3/4	19	1.075	27	2	.61	3/4 x 3/4	NPTF(M)	250	17	1.50	.68
S601034-3	3/4	19	1.075	27	3	.91	3/4 x 3/4	NPTF(M)	250	17	1.72	.78
S601026-7	3/4	19	1.075	27	7	2.13	3/4 x 3/4	NPTF(M)	250	17	3.00	1.36
S601027-2	1	27	1.375	35	2	.61	3/4 x 1	NPTF(M)	250	17	1.72	.78
S601027-5	1	27	1.375	35	5	1.52	1 x 1	NPTF(M)	250	17	3.25	1.47
Medium Pressure Oil and petroleum fluids - 100 R1T one wire braid												
S32-260043	3/8	10	.710	18	2	.61	3/8 x 3/8	NPTF(M)	2250	155	1.00	.45
S17-260043	1/2	13	.850	22	2	.61	1/2 x 1/2	NPTF(M)	2000	138	.91	.41
S39-260043	1/2	13	.850	22	5	1.52	1/2 x 1/2	NPTF(M)	2000	138	2.00	.91
High Pressure Chassis grease - 100 R2T two wire braid												
S17-260044	1/4	6	0.580	15	2	.61	1/4 x 1/4	NPTF(M)	5000	345	.75	.34
S14-260044	3/8	10	0.730	19	2	.61	3/8 x 1/2	NPTF(M)	4000	276	.83	.38



Reel Accessories | Replacement Hose Assemblies

Replacement Hose Assemblies Partial List

Part Number	I.D.	O.D.	Length	Pressure	End Fittings	Wgt.
	in	in	ft	psi	in - NPTF(M)	lbs
Low Pressure Air/water - PVC nylon braid. Max temp 150 °F (65 °C)						
S601001-20	1/4	.475	20	300	1/4 x 1/4	2.60
S601001-25	1/4	.475	25	300	1/4 x 1/4	3.00
S601001-35	1/4	.475	35	300	1/4 x 1/4	3.20
S601001-50	1/4	.475	50	300	1/4 x 1/4	5.00
S601013-15	3/8	.600	15	300	1/4 x 1/4	3.10
S601013-25	3/8	.600	25	300	1/4 x 1/4	4.50
S601013-35	3/8	.600	35	300	1/4 x 1/4	4.70
S601013-50	3/8	.600	50	300	1/4 x 1/4	6.00
S601013-100	3/8	.600	100	300	1/4 x 1/4	11.00
S601014-40	3/8	.600	40	300	1/4 x 1/2	6.00
S601017-50	3/8	.600	50	300	1/4 x 1/2	6.00
S601017-70	3/8	.600	70	300	1/4 x 1/2	7.90
S601014-100	3/8	.600	100	300	1/4 x 1/2	15.00
S601015-15	3/8	.600	15	300	3/8 x 1/2	3.00
S601015-50	3/8	.600	50	300	3/8 x 1/2	6.50
S601015-75	3/8	.600	75	300	3/8 x 1/2	8.00
S601015-100	3/8	.600	100	300	3/8 x 1/2	14.00
S601021-30	1/2	.750	30	300	3/8 x 1/2	6.30
S601021-35	1/2	.750	35	300	3/8 x 1/2	7.40
S601021-50	1/2	.750	50	300	3/8 x 1/2	10.50
S601022-35	1/2	.750	35	300	1/2 x 1/2	6.50
S601022-50	1/2	.750	50	300	1/2 x 1/2	10.50
S601035-75	1/2	.750	75	300	1/2 x 1/2	13.70
S601022-100	1/2	.750	100	300	1/2 x 1/2	18.00
S601026-20	3/4	1.075	20	250	3/4 x 3/4	5.90
S601026-25	3/4	1.075	25	250	3/4 x 3/4	7.70
S601026-30	3/4	1.075	30	250	3/4 x 3/4	9.00
S601026-40	3/4	1.075	40	250	3/4 x 3/4	12.00
S601026-50	3/4	1.075	50	250	3/4 x 3/4	15.00
S601026-75	3/4	1.075	75	250	3/4 x 3/4	18.75
S601026-100	3/4	1.075	100	250	3/4 x 3/4	22.60
S601026-150	3/4	1.075	150	250	3/4 x 3/4	37.00
S601026-200	3/4	1.075	200	250	3/4 x 3/4	58.00
S601027-30	1	1.375	30	250	3/4 x 1	13.50
S601027-40	1	1.375	40	250	3/4 x 1	17.70
S601027-45	1	1.375	45	250	3/4 x 1	20.00
S601027-50	1	1.375	50	250	3/4 x 1	21.80
Low Pressure Fuel - 4 spiral poly yarn braid						
S600160-1	3/4	1.188	25	-----	3/4 x 3/4	17.50
S600160-4	3/4	1.188	35	-----	3/4 x 3/4	24.50
S600160-2	3/4	1.188	50	-----	3/4 x 3/4	35.00
S600160-3	3/4	1.188	75	-----	3/4 x 3/4	52.50
S600451-2	1	1.500	2	-----	1 x 1	1.70
S600451-35	1	1.500	35	-----	1 x 1	30.00
S600451-50	1	1.500	50	-----	1 x 1	42.00

Caution: Be sure working pressure required does not exceed above ratings. Misapplication can result in serious operator injury. **Note:** Advise product to be handled, maximum temperature and pressure fitting size or sizes when ordering.

Part Number	I.D.	O.D.	Length	Pressure	End Fittings	Wgt.
	in	in	ft	psi	in - NPTF(M)	lbs
Medium Pressure Oil/petroleum fluids - 100 R1T one wire braid. Max temp 210 °F (99 °C)						
S43-260043	1/4	.530	50	2750	1/4 x 1/4	7.90
S13-260043	1/4	.530	20	2750	1/4 x 3/8	3.20
S14-260043	1/4	.530	25	2750	1/4 x 3/8	4.00
S20-260043	1/4	.530	30	2750	1/4 x 3/8	4.70
S33-260043	1/4	.530	35	2750	1/4 x 3/8	5.20
S15-260043	3/8	.710	20	2250	3/8 x 3/8	4.90
S12-260043	3/8	.710	25	2250	3/8 x 3/8	6.00
S16-260043	3/8	.710	30	2250	3/8 x 3/8	7.10
S44-260043	3/8	.710	35	2250	3/8 x 3/8	8.00
S46-260043	3/8	.710	50	2250	3/8 x 3/8	10.20
S3-260043	3/8	.710	30	2250	3/8 x 1/2	11.70
S4-260043	3/8	.710	40	2250	3/8 x 1/2	9.60
S5-260043	3/8	.710	50	2250	3/8 x 1/2	10.40
S40-260043	1/2	.850	16	3250	1/2 x 1/2	7.40
S21-260043	1/2	.850	25	3250	1/2 x 1/2	8.40
S6-260043	1/2	.850	30	3250	1/2 x 1/2	8.90
S37-260043	1/2	.850	35	3250	1/2 x 1/2	9.00
S22-260043	1/2	.850	40	3250	3/8 x 1/2	22.00
S7-260043	1/2	.850	40	3250	1/2 x 1/2	11.70
S8-260043	1/2	.850	50	3250	1/2 x 1/2	14.10
S24-260043	1/2	.850	75	3250	1/2 x 1/2	22.00
S26-260043	3/4	1.120	30	1250	3/4 x 3/4	13.00
S27-260043	3/4	1.120	50	1250	3/4 x 3/4	22.20
S28-260043	3/4	1.120	75	1250	3/4 x 3/4	30.00
High Pressure Chassis grease - 100 R2T 2 wire braid. Max temp 210 °F (99 °C)						
S6-260044	1/4	0.580	20	5000	1/4 x 1/4	5.20
S10-260044	1/4	0.580	25	5000	1/4 x 1/4	6.40
S7-260044	1/4	0.580	30	5000	1/4 x 1/4	7.70
S20-260044	1/4	0.580	35	5000	1/4 x 1/4	9.00
S8-260044	1/4	0.580	40	5000	1/4 x 3/8	10.20
S9-260044	1/4	0.580	50	5000	1/4 x 3/8	12.70
S13-260044	3/8	0.730	25	4800	1/4 x 1/4	9.70
S25-260044	3/8	0.730	25	4800	3/8 x 3/8	9.70
S3-260044	3/8	0.730	30	4800	1/4 x 3/8	10.72
S24-260044	3/8	0.730	35	4800	3/8 x 3/8	12.40
S26-260044	3/8	0.730	35	4800	3/8 x 1/2	12.40
S4-260044	3/8	0.730	40	4800	1/4 x 3/8	15.40
S5-260044	3/8	0.730	50	4800	1/4 x 3/8	19.20
S27-260044	3/8	0.730	50	4800	3/8 x 3/8	20.70
S19-260044	3/8	0.730	50	4800	3/8 x 1/2	20.90
S23-260044	3/8	0.730	75	4800	3/8 x 3/8	25.00
S18-260044	3/8	0.730	75	4800	3/8 x 1/2	26.60
S22-260044	3/8	0.730	100	4800	3/8 x 3/8	33.00

Caution: Be sure working pressure required does not exceed above ratings. Misapplication can result in serious operator injury. **Note:** Advise product to be handled, maximum temperature and pressure fitting size or sizes when ordering.

Same Day Quick Ship Reels

The models listed below can be shipped same day upon request when the order is received by 11:30am Eastern Time (or 11:00am Toronto time for Canada) for quantities of 10 or fewer. Applied to North American orders only. Further restrictions may apply.

Page	Model	CA	IN	CN	Size	Length
Air / Water Hose Reels						
9	4420 OLP	X	X		1/4"	20'
8	RT425-OLP	X	X		1/4"	25'
9	4425 OLP	X	X	X	1/4"	25'
---	AV5425 ELP	X			1/4"	25'
8	RT435-OLP	X	X	X	1/4"	35'
9	4400 OLP*		X		1/4"	35'
9	4435 OLP	X	X	X	1/4"	35'
8	RT450-OLP	X	X	X	1/4"	50'
9	5400 OLP*		X		1/4"	50'
9	5450 OLP	X	X	X	1/4"	50'
---	5450 OLPSW	X			1/4"	50'
8	RT625-OLP	X	X		3/8"	25'
9	4600 OLP*	X		X	3/8"	25'
9	4625 OLP	X	X	X	3/8"	25'
8	RT635-OLP	X	X	X	3/8"	35'
9	5600 OLP*	X			3/8"	35'
9	5635 OLP	X	X	X	3/8"	35'
8	RT605-OLP*	X	X		3/8"	50'
8	RT650-OLP	X	X	X	3/8"	50'
21	SGA3650 OLP	X	X	X	3/8"	50'
9	5605 OLP*	X	X	X	3/8"	50'
9	5650 OLP	X	X	X	3/8"	50'
10	7650 OLP	X	X	X	3/8"	50'
11	DP5650 OLP	X	X		3/8"	50'
11	DP7650 OLP	X	X		3/8"	50'
10	7600 OLP*	X	X	X	3/8"	70'
10	7670 OLP	X	X		3/8"	70'
13	81100 OLP	X	X	X	3/8"	100'
8	RT825-OLP	X	X		1/2"	25'
9	A5825 OLP	X	X	X	1/2"	25'
8	RT835-OLP	X	X		1/2"	35'
9	A5835 OLP	X	X		1/2"	35'
8	RT850-OLP	X	X	X	1/2"	50'
9	A5850 OLP	X	X	X	1/2"	50'
10	7800 OLP*	X	X	X	1/2"	50'
10	7850 OLP	X	X		1/2"	50'
10	7850 OLP121	X	X		1/2"	50'
10	7850 OLPSW57	X	X	X	1/2"	50'
11	DP7850 OLP	X	X	X	1/2"	50'
12	D8850 OLP	X	X		1/2"	50'
12	E8850 OLP	X			1/2"	50'
21	SGA3850 OLP	X			1/2"	50'
13	82075 OLP	X	X		1/2"	75'
13	82000 OLP*	X	X	X	1/2"	100'
13	82100 OLP	X	X	X	1/2"	100'
25	EA32112 L12D*	X			1/2"	200'
21	SWA3850 OLP	X			5/8"	50'
10	7900 OLP*	X			3/4"	25'
10	7925 OLP	X	X		3/4"	25'
13	83000 OLP*	X	X	X	3/4"	50'
13	83050 OLP	X	X	X	3/4"	50'
13	D83075 OLP	X	X		3/4"	75'
13	D84000 OLP*		X		1"	50'
13	D84050 OLP	X	X	X	1"	50'
Spring Retractable Oil Hose Reels						
9	5600 OMP*	X			3/8"	30'
10	7600 OMP*		X		3/8"	50'
10	7800 OMP*	X	X	X	1/2"	50'
10	7850 OMP	X	X	X	1/2"	50'
11	DP7850 OMP	X	X		1/2"	50'
12	D8800 OMP*	X	X		1/2"	50'
12	D8850 OMP	X	X		1/2"	50'
12	E8850 OMP	X			1/2"	50'
13	82000 OMP*	X			1/2"	75'
13	82075 OMP	X	X		1/2"	75'

Page	Model	CA	IN	CN	Size	Length
Spring Retractable Grease Hose Reels						
10	7450 OHP	X			1/4"	50'
10	7600 OHP*	X			3/8"	50'
10	7650 OHP	X	X		3/8"	50'
11	DP7650 OHP	X			3/8"	50'
12	D8850 OHP	X			3/8"	100'
13	81000 OHP*	X			3/8"	100'
Spring Retractable Fuel Hose Reels						
---	UR7850 OLB	X			1/2"	50'
---	UR7850 OLB70	X			1/2"	50'
---	UR7925 OLB	X			3/4"	25'
18	F7900 OLP*	X			3/4"	25'
18	F7925 OLP	X	X		3/4"	25'
18	F83000 OLP*	X			3/4"	50'
18	F83050 OLP	X			3/4"	50'
18	FD83000 OLP*	X			3/4"	75'
18	FD84000 OLP*	X	X	X	1"	50'
18	FD84050 OLP	X	X		1"	50'
18	FD9400 OLPBW*	X			1"	50'
18	FD9450 OLPBW				1"	50'
18	FF9500 OLPBW*	X			1 1/4"	50'
18	FF9600 OLPBW*	X	X		1 1/2"	50'
Static Discharge / Grounding Reels						
18	G 3050	X	X	X		50'
18	G 3050 Y		X			50'
18	G 3050 N	X	X			50'
18	GA3100 N	X	X	X		100'
18	GHC3100 N		X			100'
Stainless Steel Hose Reels						
19	5600 OLS*	X			3/8"	35'
19	LC607 OLS	X			3/8"	70'
19	LC800 OLS	X			1/2"	50'
19	7800 OLS*	X	X		1/2"	50'
19	HS18000 M*	X			1/2"	200'
19	7800 OMS*	X			1/2"	50'
Hand Crank Pressure Wash Hose Reels						
23	CT6050HN*		X		3/8"	50'
23	CM6050HN*		X		3/8"	50'
23	CT6100HN*	X	X		3/8"	100'
23	CM6100HN*	X	X		3/8"	100'
22	H18006 M*	X	X		3/8"	100'
22	CA38106 M*		X		3/8"	140'
22	CA38112 M*	X	X		3/8"	300'
Hand Crank Air / Water Hose Reels						
23	CU6050LN*	X	X	X	3/8"	50'
23	CT6050LN*	X	X		3/8"	50'
23	CU6100LN*	X	X		3/8"	100'
23	CT6100LN*	X			3/8"	100'
24	H1600*	X			3/8"	300'
23	CU8050LN*	X			1/2"	50'
23	CT8050LN*	X			1/2"	50'
23	CU8100LN*	X			1/2"	100'
23	CT8100LN*	X			1/2"	100'
24	H18000*	X			1/2"	200'
25	CA32106 L*	X	X	X	1/2"	100'
25	CA32112 L*	X	X	X	1/2"	200'
25	CA32118 L*	X	X	X	1/2"	325'
25	CA32122 L*	X			1/2"	400'
25	CA33106 L*	X	X	X	3/4"	50'
24	H19000*	X			3/4"	90'
25	CA33112 L*	X	X	X	3/4"	100'
25	CA33118 L*	X	X	X	3/4"	175'
---	CB37118 L*	X	X	X	1"	100'

Page	Model	CA	IN	CN	Size	Length
Spring Retractable Twin Hydraulic Hose Reels						
17	TH88000 OMP*	X	X	X	1/2"	50'
17	TH88050 OMP		X		1/2"	50'
Spring Retractable Pressure Wash Hose Reels						
22	PW7600 OHP*				3/8"	50'
22	PW7650 OHP	X	X	X	3/8"	50'
22	PW81000 OHP*	X	X	X	3/8"	100'
Hand Crank Oil Hose Reels						
24	H18000 M*					1/2"
25	CA32106 M*	X				1/2"
25	CA32112 M*	X	X	X		1/2"
Power & Light Cord Reels						
36	LD2040 163 2					16/3
36	LD2030 163 9					16/3
36	LD2030 143 9					14/3
36	LG3050 163 8	X				16/3
36	LG3050 143 9					14/3
36	LG3040 123 9	X	X	X		12/3
36	LH2080 143	X	X			14/3
36	LH3100*					100'
39	L 4050 163 1	X				16/3
38	L 4035 163 3	X	X	X		16/3
38	L 4050 163 3	X	X	X		16/3
38	L 4545 123 3	X	X	X		12/3
38	L 5550 123 3A	X	X			12/3
38	L 5550 123 3A	X	X			12/3
38	L 4545 123 7	X	X	X		12/3
38	L 5550 123 7	X	X			12/3
38	L 4545 123 7A					12/3
38	L 4545 123 7B					12/3
38	L 4545 123 9	X	X			12/3
38	L 4545 123 9G					12/3
39	L 4050 163 10	X				16/3
38	L 4545 123 X	X				12/3
38	L 4500					12/3
38	L 7000*	X				35'
Gas Welding Hose Reels						
42	TW5425 OLP	X				1/4"
42	TW5425 OLPT		X			1/4"
42	STW3450 OLP		X			1/4"
42	TW7400 OLP*	X				1/4"
42	TW7450 OLP	X	X	X		1/4"
42	TW7450 OLPT	X	X			1/4"
42	TW84100 OLPT	X	X	X		1/4"
42	TW86075 OLPT	X	X			3/8"
45	T-1225-04*	X	X	X		1/4"
Welding Cable Reels						
44	CEA30006*	X	X			#2/0
44	CEA30012*		X			#2/0
45	T-2462-0*	X				#2/0
45	T-2464-0*	X	X			#2/0
44	WC7000*	X	X			#2/0
Tool Balancers						
46	TB 01					0~1.5 lbs
46	TB 03					1.5~3 lbs
46	TB 05					3~5 lbs
46	TB 10					5~10 lbs
46	TB 12					8~12 lbs
46	TB 15					10~15 lbs
46	TB 23					16~23 lbs
46	TBL 10					5~10 lbs
46	TBL 12					8~12 lbs
46	TBL 15					10~15 lbs
46	TBL 23					16~23 lbs

*Without hose or cable

North America and Corporate Headquarters

2842 E. Business Hwy 30
Columbia City, IN 46725

Customer Service: 855-634-9109
Ph: 800-444-3134 • Fax: 800-444-4587
Ph: 260-248-8188 • Fax: 260-248-2605
reelcraft@reelcraft.com

www.reelcraft.com

Latin America and the Middle East

Thompson International, Inc.
P.O. Box 12958, Ft. Wayne, IN 46866
Ph: 260-489-1685 • Fax: 260-489-0203
info@t-i-i.com

www.reelcraft.com/latinamerica

Pacific Rim

P.O. Box 53776, Clark Freeport Zone
Philippines 2023
Ph: +63 (45) 625-6624
Fax: +63 (45) 321-0643
rap@comclark.com

www.reelcraft.com/asia

Europe

Unit 17 • Cronin Courtyard
Weldon South Industrial Estate
Corby • Northamptonshire NN18 8AG
United Kingdom
Ph: +44 (0) 1536 406999
Fax: +44 (0) 1536 406777
europe@reelcraft.com

www.reelcraft.com/europe

China

Reelcraft Changzhou Co., Ltd.
Building C, No. 229 HeHai West Road
Changzhou, Jiangsu, China 213022
Ph: +86 (519) 8512 2391 ext. 8002
Fax: +86 (519) 8512 9309
rco@reelcraftchina.com

www.reelcraftchina.com

Australia

PO Box 6463 BC, Blacktown
NSW 2148, Australia
Ph: +61 (2) 9621 8988
Fax: +61 (2) 9621 7688
sales@recoilala.com

www.reelcraft.com