



CEA30006



WC80001

Hand Crank / Spring Retractable Cable Welding Reels Series CEA / WC

- Designed to improve safety in the work area with an increase in efficiency and productivity
- Cable reels have a current path through a continuous 400 or 700 AMP, 90 V DC (maximum) rated enclosed slip ring




WC7000

- Welding cable reels store work lead or electrode lead, up to #4/0, safely and effectively when not in use. Each lead requires a separate reel. When welding also refer to ANSI/ASC Z 49.1
- Stores cable when not in use, eliminating tangled, kinked welding cables
- Maintains proper bend radius of cables, providing longer cable life
- Keeps work area and vehicles better organized, resulting in better space utilization


Features - Hand Crank Reels

- ✓ All-bolted heavy gauge steel construction provides long life and ease of use and maintenance.
- ✓ Manual drum lock prevents spool from turning when not in use preventing unwanted pay out of cable.

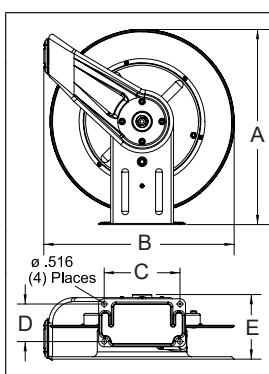

Caution: If cable reels are to be used for extended periods of time, unwind all cable from reel to prevent heat build-up. For indoor non weather-tight applications only.

Size Index					
	1 in mm	2 in mm	3 in mm		
A	20 1/4 514	20 1/4 514	25 3/8 645		
B	19 3/4 502	19 3/4 502	24 610		
C	7 7/8 200	7 7/8 200	10 254		
D	3 7/8 98	3 7/8 98	6 152		
E	13 1/4 337	14 356	15 5/8 397		

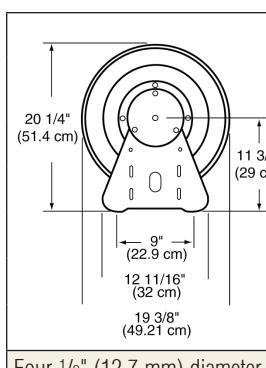

Size Index					
	4 in mm	5 in mm			
A	6 152	12 305			
B	9 3/4 248	15 3/4 400			
C	11 279	17 432			
D	15 381	21 533			
E	21 533	27 686			

Four 1/2" (12.7 mm) diameter mounting holes.

Interactive Reel Catalog



Visit www.reelcraft.com/catalog for complete product specifications, available parts and accessories.

Prop 65: WARNING:

Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

Cable Size	Bumper
#2, #1	1-HR1004-A
#1/0, #2/0, #3/0	1-HR1004
#4/0	2-HR1004-3

Model without cable & bumper	Cable Size						Amps	Shipping Weight	Size Index #
	#2 (34mm ²) ft m	#1 (42mm ²) ft m	#1/0 (54mm ²) ft m	#2/0 (67mm ²) ft m	#3/0 (85mm ²) ft m	#4/0 (107mm ²) ft m			
CEA30006 	300 91	250 76	200 61	150 46	-----	-----	400	46 21	4
CEA30012 	500* 152	500* 152	400 122	300 91	-----	-----	400	54 24	5
WC7000 	-----	50 15	50 15	50 15	-----	-----	400	58 26	1
WCH7000	-----	-----	-----	-----	50 15	50 15	700	58 26	2
WC80001	-----	75 23	75 23	75 23	-----	-----	400	102 46	3
WC80002	-----	100 30	-----	-----	-----	-----	400	104 47	3
WCH80001	-----	-----	-----	-----	75 23	75 23	700	102 46	3

*May exceed maximum cable length allowable for most welding applications. **NOTE:** Each cable requires separate reel. Reference page 4 for guide arm positions.

Models listed with an icon can ship same day upon request when the order is received by 1:00 PM Eastern Time for quantities of 10 or fewer.

 Indiana Warehouse

 California & California
Warehouses

 California Warehouse

 Canadian Warehouse