

# MicroSol<sup>®</sup> 455

## Low-foam Ferrous Semisynthetic

TRIM<sup>®</sup> MicroSol<sup>®</sup> 455 low-foam semisynthetic, microemulsion coolant is optimized for high-volume cast iron, ferrous, and some aluminum and nonferrous metalworking operations. MicroSol 455 prevents leaching of elemental iron and eliminates clinkering and oxidation of ferrous micro fines.

Delivering extended sump life, machine-friendly MicroSol 455 provides excellent, cost-effective cooling. Make a difference to your bottom line with MicroSol 455.

### MicroSol



#### For ultimate performance:

*TRIM<sup>®</sup> MicroSol<sup>®</sup> semisynthetic microemulsion coolants deliver high-performance lubricity and ultimately lowers costs. Achieve precision parts, exceptional tool life, extended sump life, assured regulatory compliance, and greater profitability with the MicroSol product just right for your production.*

*Designed to meet the rigorous demands of the aerospace, medical, automotive, or high production, precision parts manufacturing industries, there's a MicroSol to answer your concerns, ramp up your production, and boost your bottom line.*



#### Choose MicroSol 455:

- Low foaming for today's demanding high-pressure, high-volume applications
- Also for machining some aluminum alloys and nonferrous metals
- Provides superior corrosion inhibition on cast iron and eliminates "hot chip" and clinkering problems
- Keeps machines very clean while leaving a soft fluid film for ease of cleaning and reduced maintenance
- Requires no special disposal or recycling

#### MicroSol 455 especially for:

**Applications** — high-pressure, high-volume, machining, and slab milling

**Metals** — cast iron and ferrous metals

**Industries** — automotive and general industry

**MicroSol 455 is free of** — boron, chlorine, DEA, and sulfur

# MicroSol<sup>®</sup> 455

## Low-foam Ferrous Semisynthetic

### Application Guidelines

- Running at or above 6% offers the best sump life and corrosion inhibition on cast iron chips.
- MicroSol 455 is not recommended for use on very reactive metals, such as magnesium.
- For additional product application information, including performance optimization, please contact your Master Fluid Solutions' Authorized Distributor at <https://www.2trim.us/distributors.php>, your District Sales Manager, or call our Tech Line at 1-800-537-3365.

### Physical Properties Typical Data


Color (Concentrate)	Light yellow to amber
Color (Working Solution)	Opaque
Odor (Concentrate)	Mild amine
Form (Concentrate)	Liquid
Flash Point (Concentrate) (ASTM D92-90)	> 284°F
pH (Concentrate as Range)	10.1 - 10.3
pH (Typical Operating as Range)	8.7 - 9.7
Coolant Refractometer Factor	2.0
Titration Factor (CGF-1 Titration Kit)	0.82
Digital Titration Factor	0.0247
V.O.C. Content (ASTM E1868-10)	1 g/l

### Recommended Metalworking Concentrations

Light duty	4.0% - 6.5%
Moderate duty	6.5% - 8.5%
Heavy duty	8.5% - 10.0%
Design Concentration Range	4.0% - 10.0%




### Concentration by % Brix

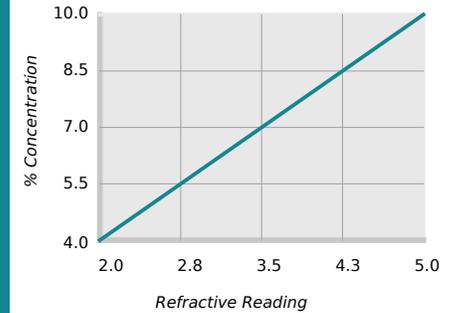

$$\% \text{ Concentration} = \text{Refractive Reading} \times \text{Refractive Factor}$$

Coolant Refractometer Factor % Brix = 2.0

### Concentration by Titration

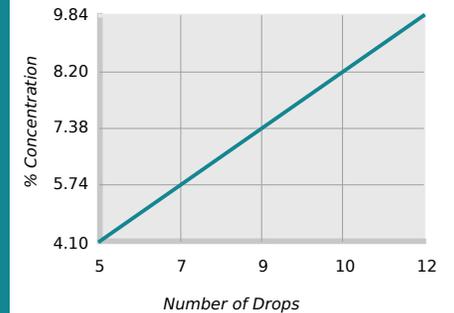

$$\% \text{ Concentration} = \text{No. of Drops} \times \text{Titration Factor}$$

Titration Factor = 0.82

### Health and Safety

See the most recent SDS at

<https://2trim.us/s/?i=2706-en-US-US>



# MicroSol<sup>®</sup> 455

## Low-foam Ferrous Semisynthetic




### Mixing Instructions

- Recommended usage concentration in water: 4.0% - 10.0%.
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.
- Use premixed coolant as makeup to improve coolant performance and reduce coolant purchases. The makeup you select should balance the water evaporation rate with the coolant carryout rate. Use our Coolant Makeup Calculator to find the best ratio for your machine: [apps.masterfluidsolutions.com/makeup/](https://apps.masterfluidsolutions.com/makeup/)
- Use mineral-free water to improve sump life and corrosion inhibition while reducing carryoff and concentrate usage.



1-gallon jug  
SKU: MS455/1  
UPC-12: 641238077237



5-gallon pail  
SKU: MS455/5  
UPC-12: 641238077190



54-gallon drum  
SKU: MS455/54  
UPC-12: 641238077183



270-gallon tote  
SKU: MS455/NR270P  
UPC-12: 641238077206

TRIM<sup>®</sup> MicroSol<sup>®</sup> 455 | ©2018-2019 Master Fluid Solutions<sup>®</sup> | 2019-01-17

### Additional Information

- Use Master STAGES<sup>™</sup> Whamex<sup>™</sup> for a quick and thorough precleaning of your machine tool and coolant system.
- Before using on any metals or applications not specifically recommended, consult Master Fluid Solutions.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.

TRIM<sup>®</sup> and MicroSol<sup>®</sup> are registered trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.

Master STAGES<sup>™</sup> and Whamex<sup>™</sup> are trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.

The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

[https://2trim.us/di/?plr=MS455\\*en-us\\*na](https://2trim.us/di/?plr=MS455*en-us*na)



Master Fluid Solutions  
501 West Boundary Street  
Perrysburg, OH 43551-1200  
USA

+1 419-874-7902  
[info@masterchemical.com](mailto:info@masterchemical.com)  
[masterfluidsolutions.com/na/en-us/](https://masterfluidsolutions.com/na/en-us/)

**Master Fluid Solutions<sup>®</sup>**  
—Cutting Edge Metalworking Solutions<sup>™</sup>—